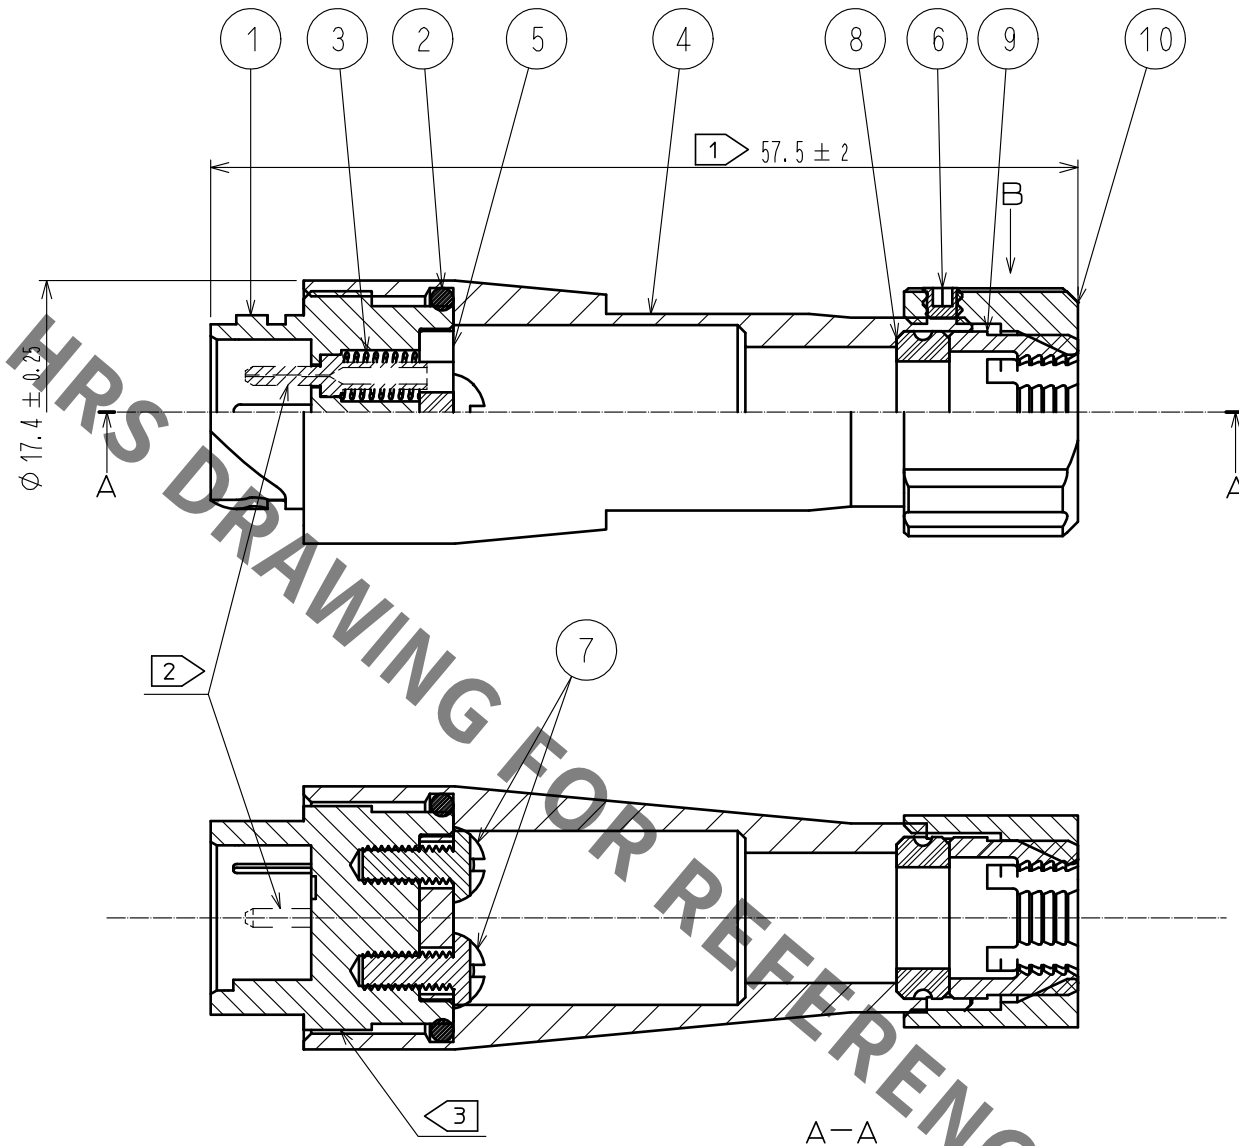




- NOTE
- 1 These are indicates the dimensions of after assembling
 - 2 Ferrules are not included in this product. MU Ferrules are sold separately.
 - 3 Apply adhesive to around the threads of R-shell-J(part No.1) before tighten Hood(part No.4).
 - 4 Clamp ring has two holes for fixing hexagon socket screw.
Tighten the screw at visible either hole with tightening torque 25N・cm. or either hole if both holes are visible.

6	STAINLESS STEEL				
5	PBT RESIN	COLOR:BLACK	11	SILICONE RUBBER	COLOR:BLACK
4	ALUMINUM ALLOY	ANODIC OXIDE COATING	10	ZINC ALLOY DIE CASTING	CHROME PLATING(COLOR:BLACK)
3	PIANO WIRE	ZINC PLATING * BAKING	9	PA RESIN	COLOR:WHITE
2	NITRILE BUTADIENE RUBBER	COLOR:BLACK	8	CHLOROPRENE RUBBER	COLOR:BLACK
1	ZINC ALLOY DIE CASTING	CHROME PLATING(COLOR:BLACK)	7	STAINLESS STEEL	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HIROSE ELECTRIC CO., LTD.		APPROVED : MT. SHIBUTANI	18. 03. 29	DRAWING NO.	EDC-177477-32-00
		CHECKED : MT. SHIBUTANI	18. 03. 29	PART NO.	MF10B-WJ6. 5CH01-0200(32)
		DESIGNED : SI. MATSUMOTO	18. 03. 29	CODE NO.	CL709-1035-5-32
		DRAWN : SI. MATSUMOTO	18. 03. 29		