
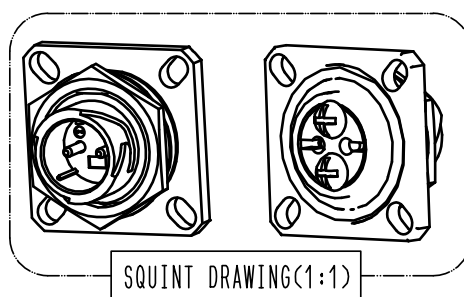
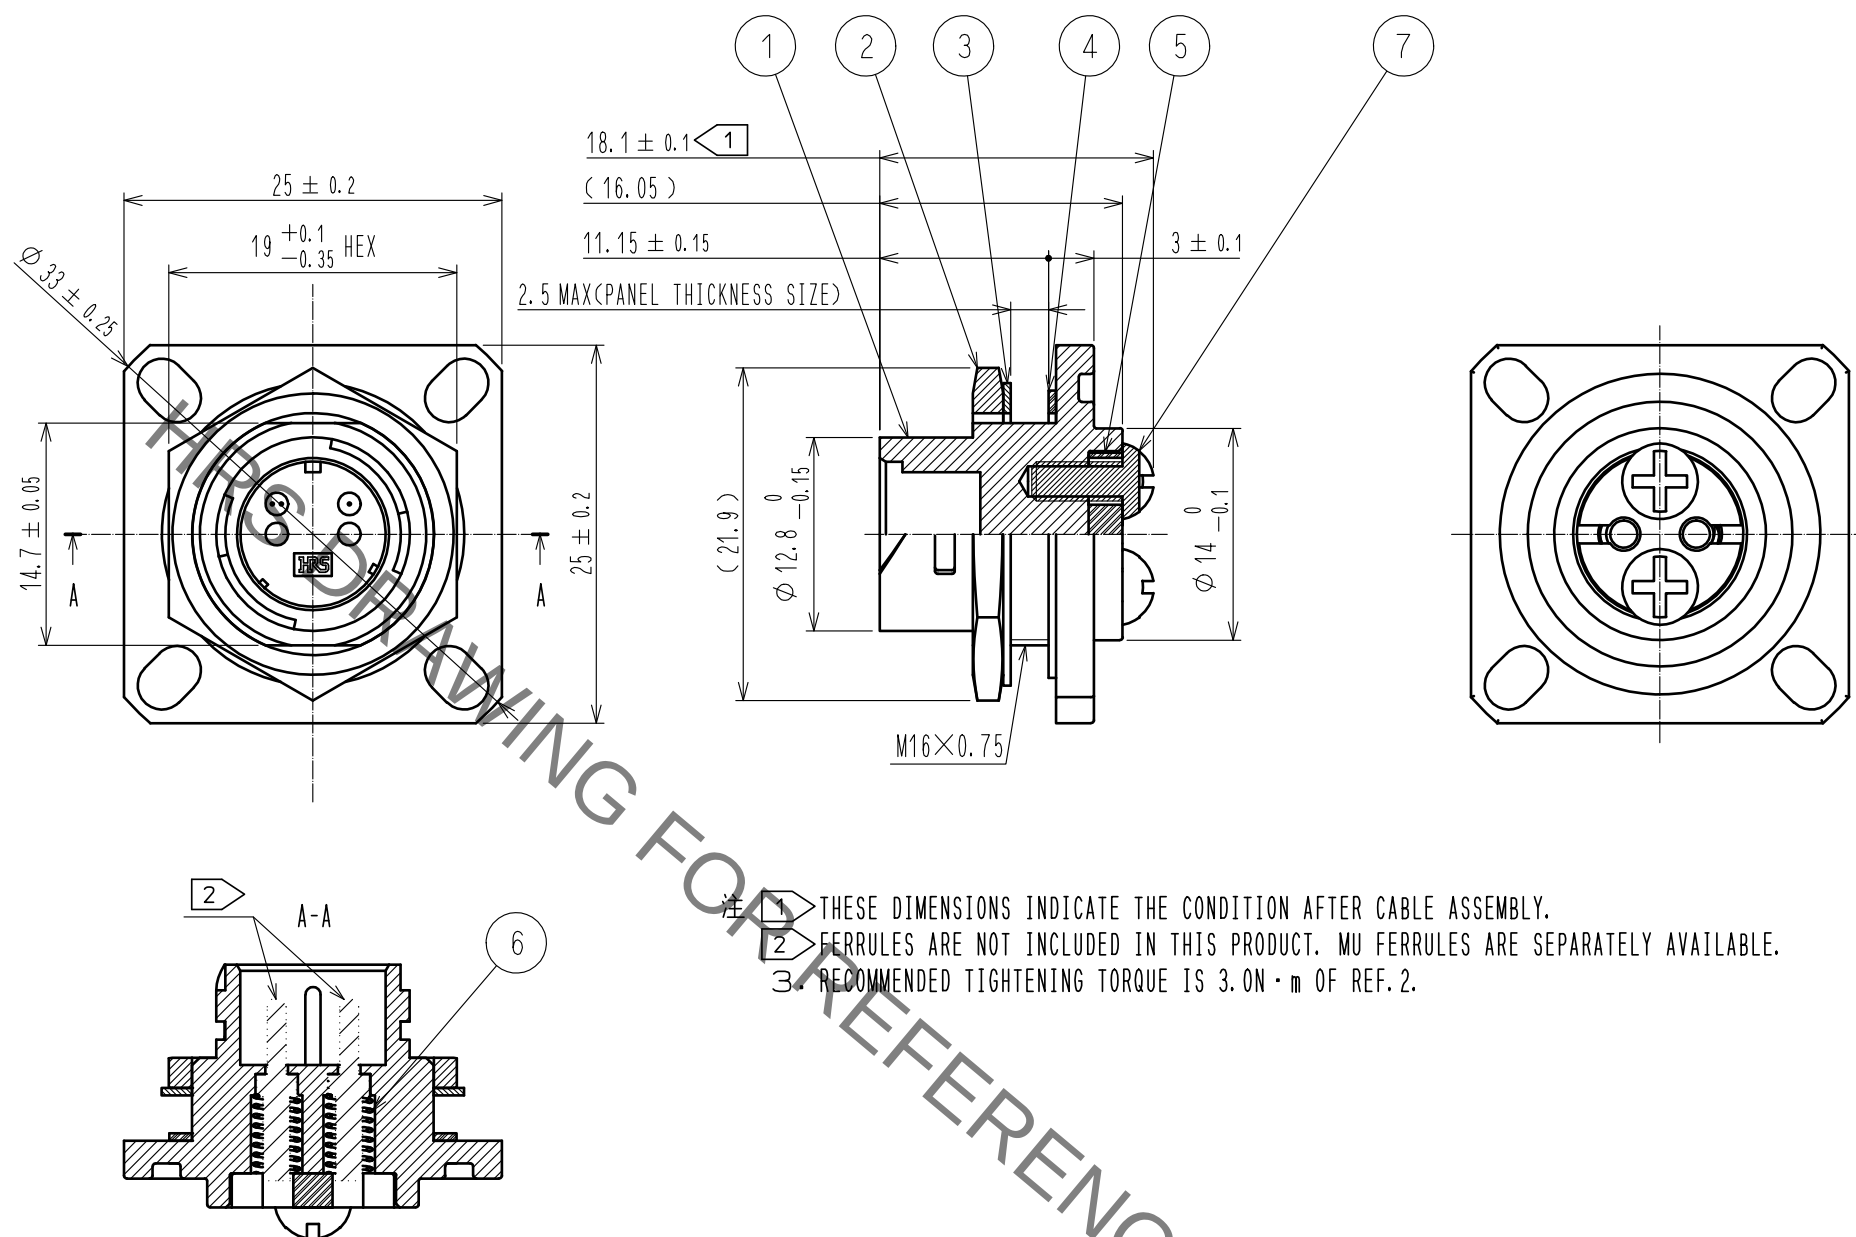


A
B
C
D
E
F

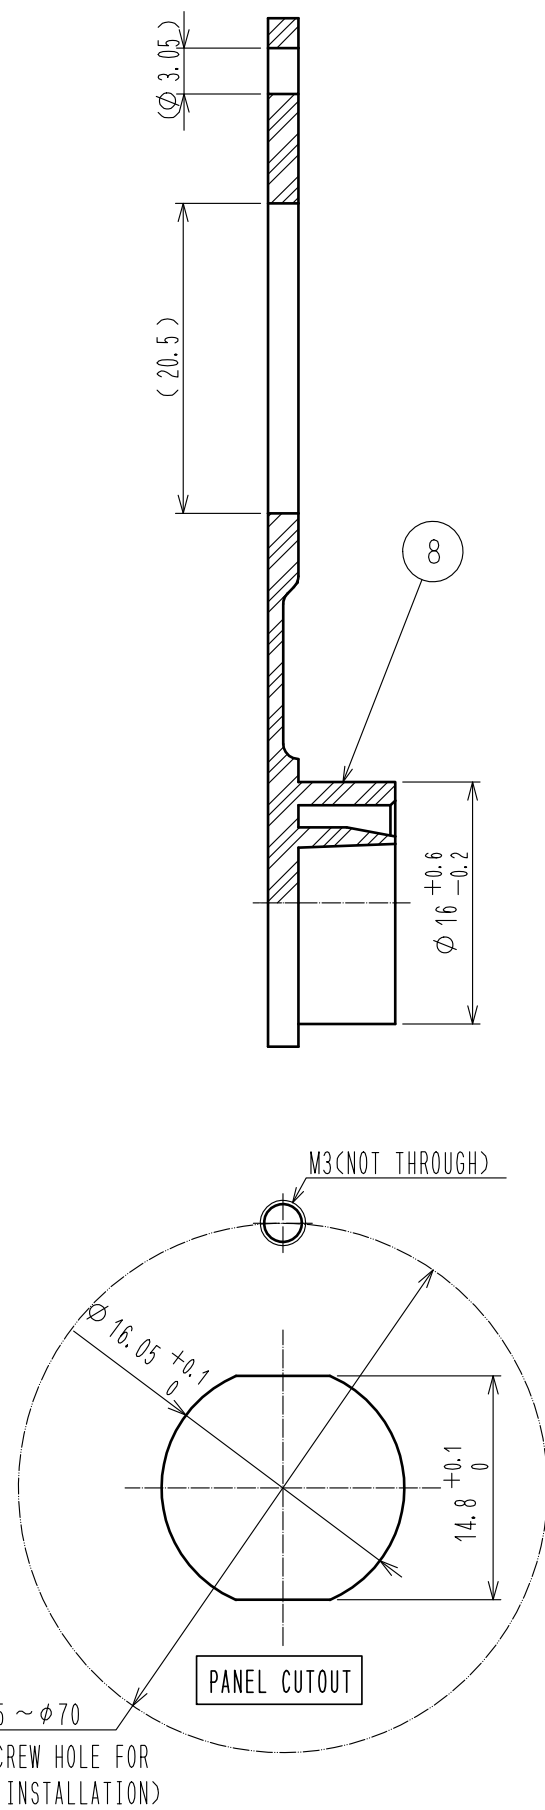

- 注 1 THESE DIMENSIONS INDICATE THE CONDITION AFTER CABLE ASSEMBLY.
2 FERRULES ARE NOT INCLUDED IN THIS PRODUCT. MU FERRULES ARE SEPARATELY AVAILABLE.
3 RECOMMENDED TIGHTENING TORQUE IS 3.0N·m OF REF. 2.

4	SYNTHETIC RUBBER		8	SYNTHETIC RUBBER	
3	BRASS	NICKEL PLATING	7	STAINLESS STEELS	
2	BRASS	NICKEL PLATING	6	PIANO WIRE	ZINC PLATING + BAKING
1	ZINC DIE CASTING	NICKEL PLATING	5	SYNTHETIC RESIN	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
APPROVED : MT. SHIBUTANI		18.02.02	DRAWING NO.	EDC-176897-31-00	
CHECKED : FS. YOSHIDA		18.02.02	PART NO.	MF10B-WRB01-0200(31)	
DESIGNED : TY. SATO		18.02.02	CODE NO.	CL709-1010-4-31	
DRAWN : MK. INOUE		18.02.02			