

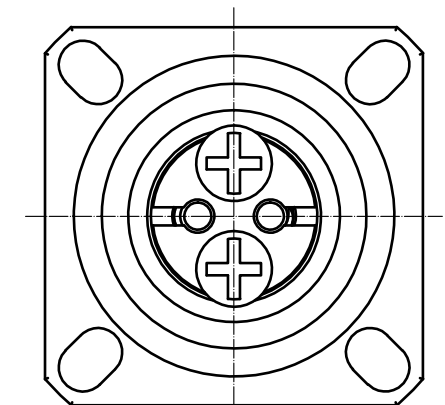
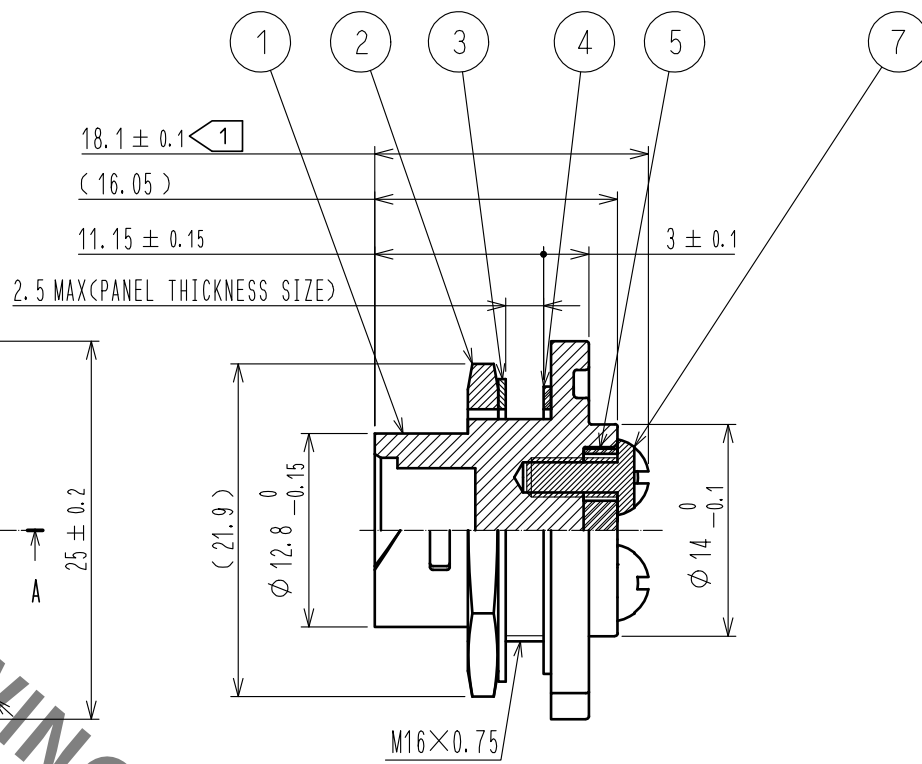
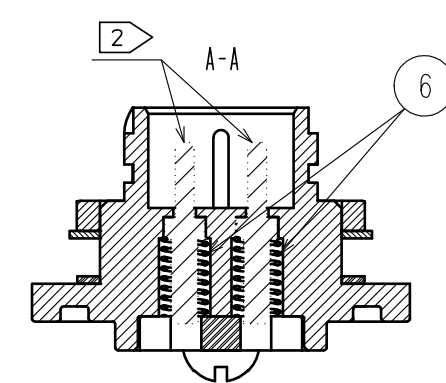
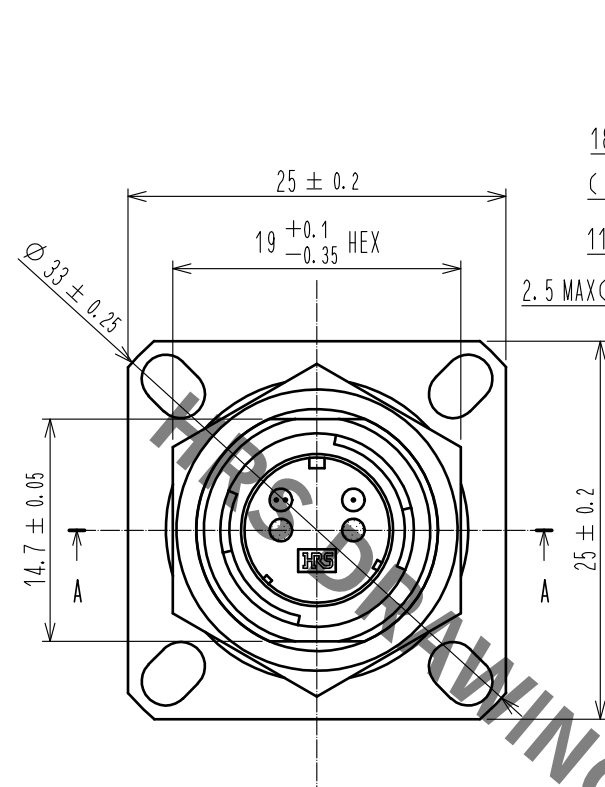


May.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

A
B
C
D
E
F

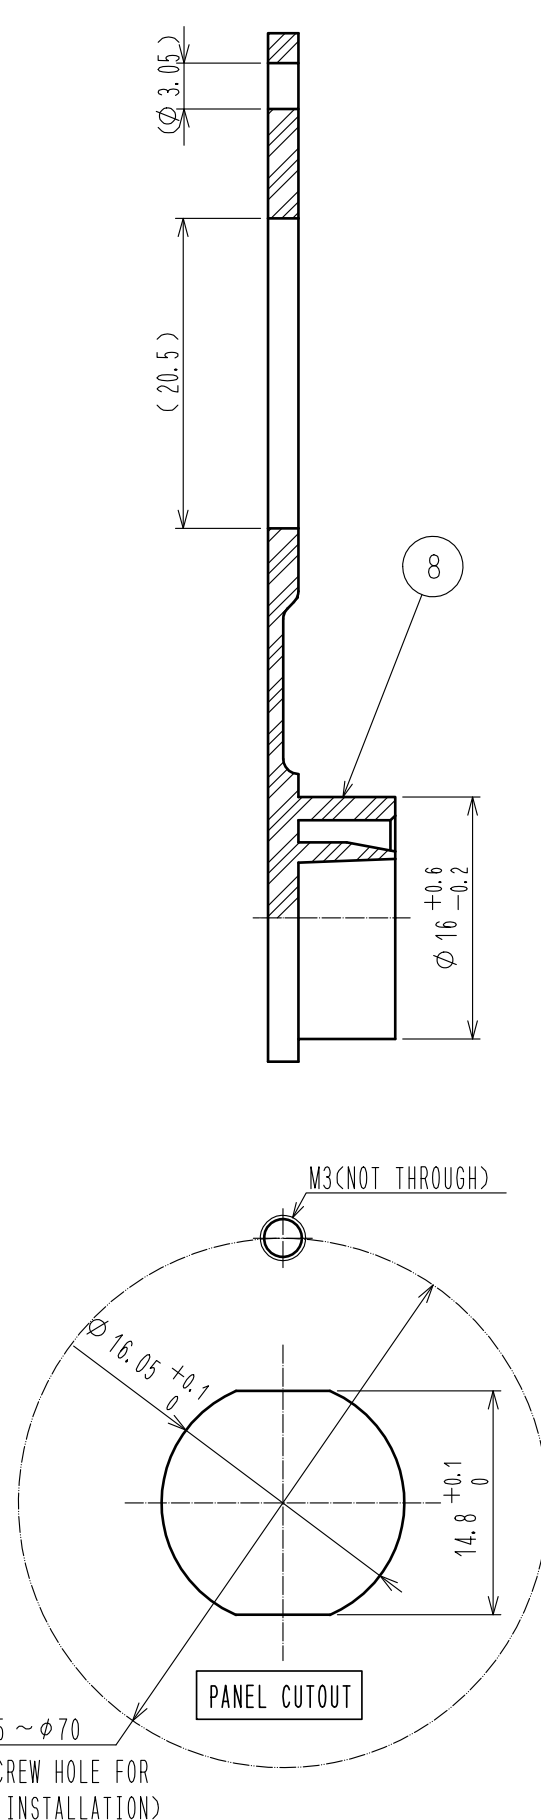

注 1 THESE DIMENSIONS INDICATE THE CONDITION AFTER CABLE ASSEMBLY.
2 FERRULES ARE NOT INCLUDED IN THIS PRODUCT. MU FERRULES ARE SEPARATELY AVAILABLE.
3 RECOMMENDED TIGHTENING TORQUE IS 3.0N・m OF REF.2.

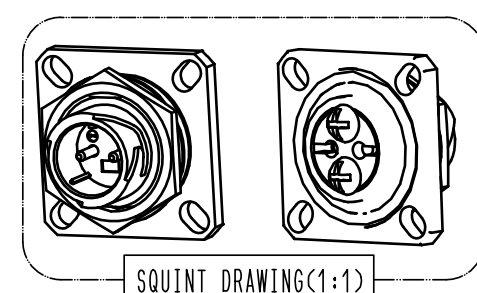

4	SYNTHETIC RUBBER		8	SYNTHETIC RUBBER	
3	BRASS	TRIVALENT CHROME PLATING	7	STAINLESS STEELS	
2	BRASS	TRIVALENT CHROME PLATING	6	PIANO WIRE	ZINC PLATING + BAKING
1	ZINC DIE CASTING	TRIVALENT CHROME PLATING	5	SYNTHETIC RESIN	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
APPROVED : MT. SHIBUTANI		18.03.29		DRAWING NO. EDC-177316-31-00	
CHECKED : MT. SHIBUTANI		18.03.29		PART NO. MF10B-WRBT01-0200(31)	
DESIGNED : SI. MATSUMOTO		18.03.29		CODE NO. CL709-1030-1-31	
DRAWN : SI. MATSUMOTO		18.03.29			