


Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

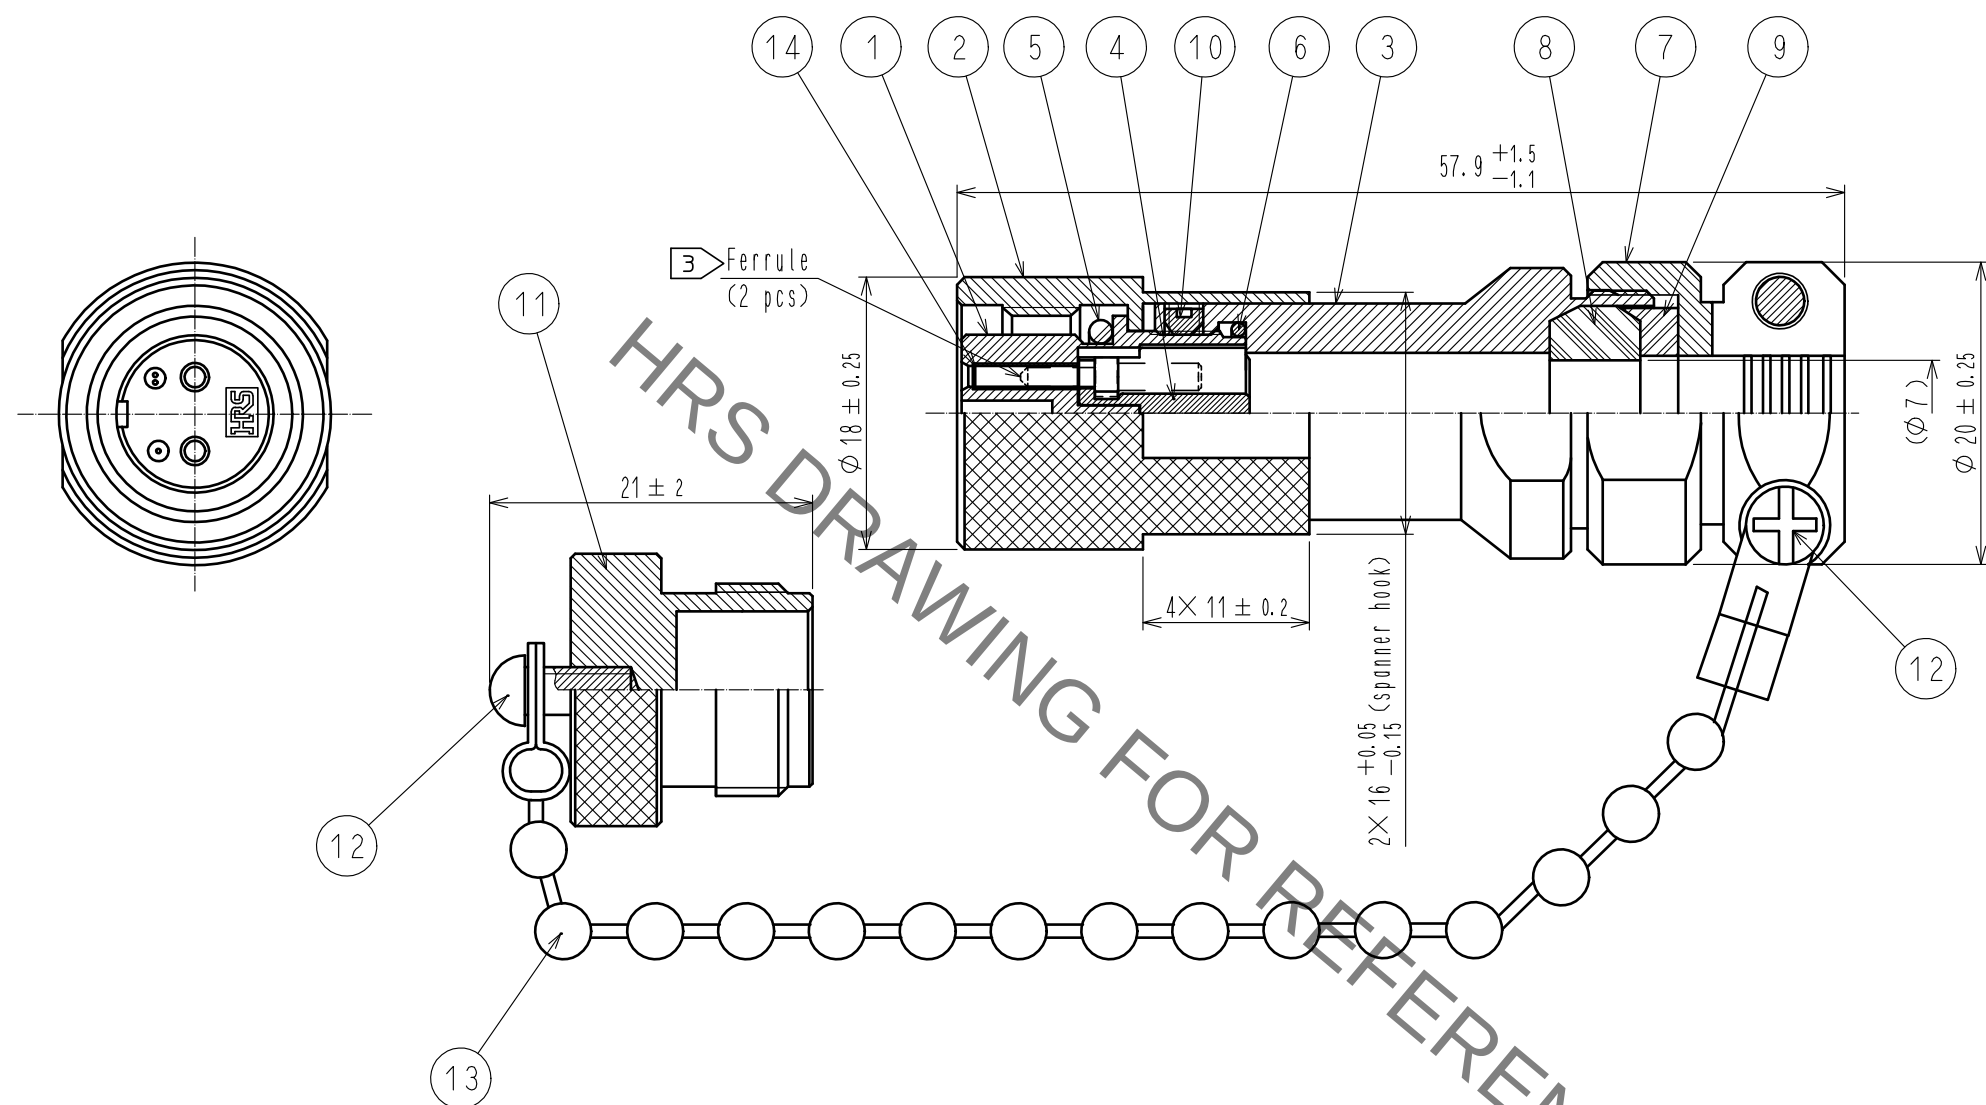

- NOTE 1. The procedure of cable assemblies would be confirm.
2. When this plug is mated with a MF10S receptacle, the clamp torque of the part No.⑧ should be 1.5 to 3 N·m. Following MF10-T1 can be used as simple substitution of a torque wrench.

EXCLUSIVE PLASTIC SPANNER	PART NO.	CODE NO.
	MF10-T1	CL709-0205-8

③ The ferrule parts are not contained.
Please use the 'standard MU ferrule' chosen from the outer diameter of the optical fiber.

7	BRASS	CHROME PLATING	14	ZIRCONIA	
6	NBR RUBBER	COLOR:BLACK	13	STAINLESS STEEL	
5	NBR RUBBER	COLOR:BLACK	12	STAINLESS STEEL	NYELOCK
4	ZINC DIECAST	NICKEL PLATING	11	ALUMINIUM ALLOY	ANODIC OXIDE COATING
3	ALUMINIUM ALLOY	ANODIC OXIDE COATING	10	STAINLESS STEEL	
2	BRASS	CHROME PLATING	9	PPS RESIN	COLOR:BLACK
1	ZINC DIECAST	CHROME PLATING	8	NBR RUBBER	COLOR:BLACK
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : MT. SHIBUTANI	18.02.01	DRAWING NO.	EDC-178122-31-00
		CHECKED : FS. YOSHIDA	18.02.01	PART NO.	MF10S-WP7C50-0200(31)
		DESIGNED : TY. SATO	18.02.01	CODE NO.	CL709-0211-0-31
		DRAWN : MK. INOUE	18.02.01		