
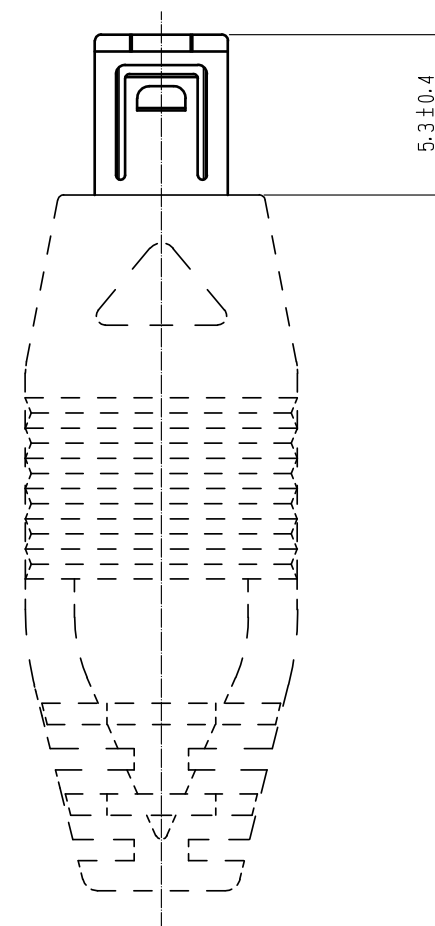
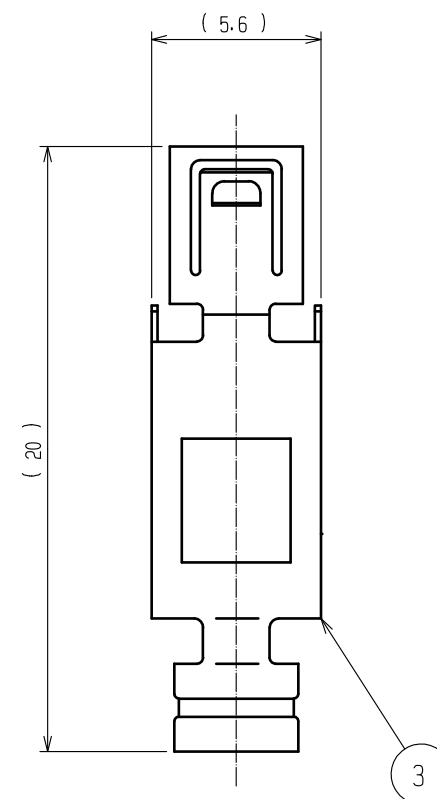
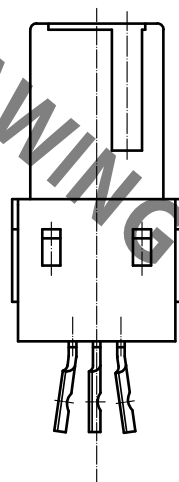




- NOTES
- ① POLARIZATION IS AS SHOWN ON CHART-1.
 - ② TERMINAL AREA SHALL BE COVERED WITH SHRINKAGE TUBE AFTER SOLDERING.
3. DIRECTIONS FOR USE.
- PLEASE DO NOT USE FOR THE PURPOSE OF INTERRUPTING THE CURRENT.

1 CHART-1 POLARIZATION

No. 1 ^{...} (+)	POWER
No. 2 ^{...} (+)	SIGNAL
No. 3 ^{...} (-)	POWER

1	COPPER ALLOY	CONTACT AREA : PALLADIUM-NICKEL 0.7μm MIN. + GOLD 0.2μm MIN. LEAD AREA : GOLD 0.03μm MIN. UNDER PLATING : NICKEL 1.27μm MIN.			3	STAINLESS STEEL			
					2	POLYAMIDE	BLACK UL94V-0		
NO.	MATERIAL	FINISH . REMARKS			NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : NM. NISHIMATSU	15. 10. 27	DRAWING NO.	EDC-120678-31-00				
		CHECKED : KN. ICHIKAWA	15. 10. 27	PART NO.	MQ172-3SA-CV(31)				
		DESIGNED : TS. ITO	15. 10. 27	CODE NO.	CL206-0951-7-31				
		DRAWN : AK. AKIYAMA	15. 10. 27						