



HONEYWELL  
PART NUMBER  
15PA320-TL

| REV | DOCUMENT | CHANGED BY  | CHECK |
|-----|----------|-------------|-------|
| A   | 0036603  | KRB 07JAN08 | RJ    |

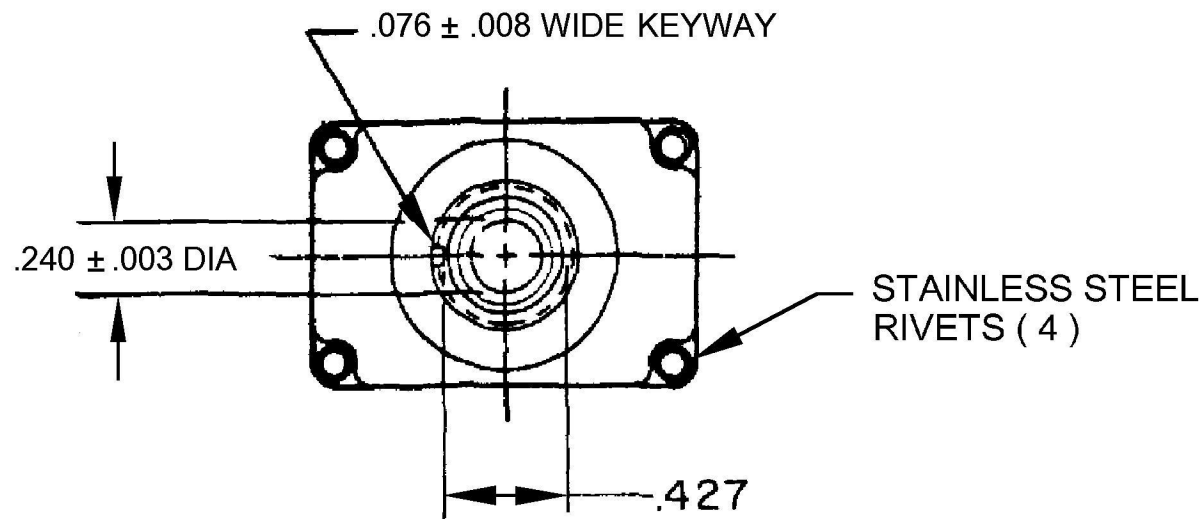


| ISSUE | CATALOG LISTING | RECOMMENDED LOCKING COMBINATIONS FOR CONFIGURATIONS SEE LETTERED DETAILS | CIRCUIT WITH TOGGLE IN  |                 |                                          |
|-------|-----------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------|------------------------------------------|
|       |                 |                                                                          | ONE EXTREME POSITION (KEYWAY)                                                                              | CENTER POSITION | OTHER EXTREME POSITION (OPPOSITE KEYWAY) |
|       |                 |                                                                          |                                                                                                            |                 |                                          |
|       |                 |                                                                          |                                                                                                            |                 |                                          |
|       |                 |                                                                          |                                                                                                            |                 |                                          |
|       |                 |                                                                          |                                                                                                            |                 |                                          |
|       |                 |                                                                          |                                                                                                            |                 |                                          |
|       | 15PA320 - TL    |                                                                          | MOM ON                                                                                                     | OFF             | MOM ON                                   |
|       |                 |                                                                          |                                                                                                            |                 |                                          |
|       |                 |                                                                          |                                                                                                            |                 |                                          |


| CURRENT CAPACITY (AMPS) |          |           |          |                |          |          |          |
|-------------------------|----------|-----------|----------|----------------|----------|----------|----------|
| RESISTIVE LOAD          |          | LAMP LOAD |          | INDUCTIVE LOAD |          |          |          |
| DC VOLTS                | AC VOLTS | DC VOLTS  | AC VOLTS | DC VOLTS       | AC VOLTS | DC VOLTS | AC VOLTS |
| 28                      | 125      | 250       | 125      | 250            | 28       | 125      | 250      |
|                         |          |           |          |                | VDC      | VAC      | VDC      |
| 20                      | .75      | .5        | 15       | 6              | 7        | 4        | 15       |
|                         |          |           |          |                |          |          |          |
| 18                      | .75      | .5        | 11       | 6              | 5        | 2        | 10       |
|                         |          |           |          |                |          |          |          |
|                         |          |           |          |                |          |          |          |

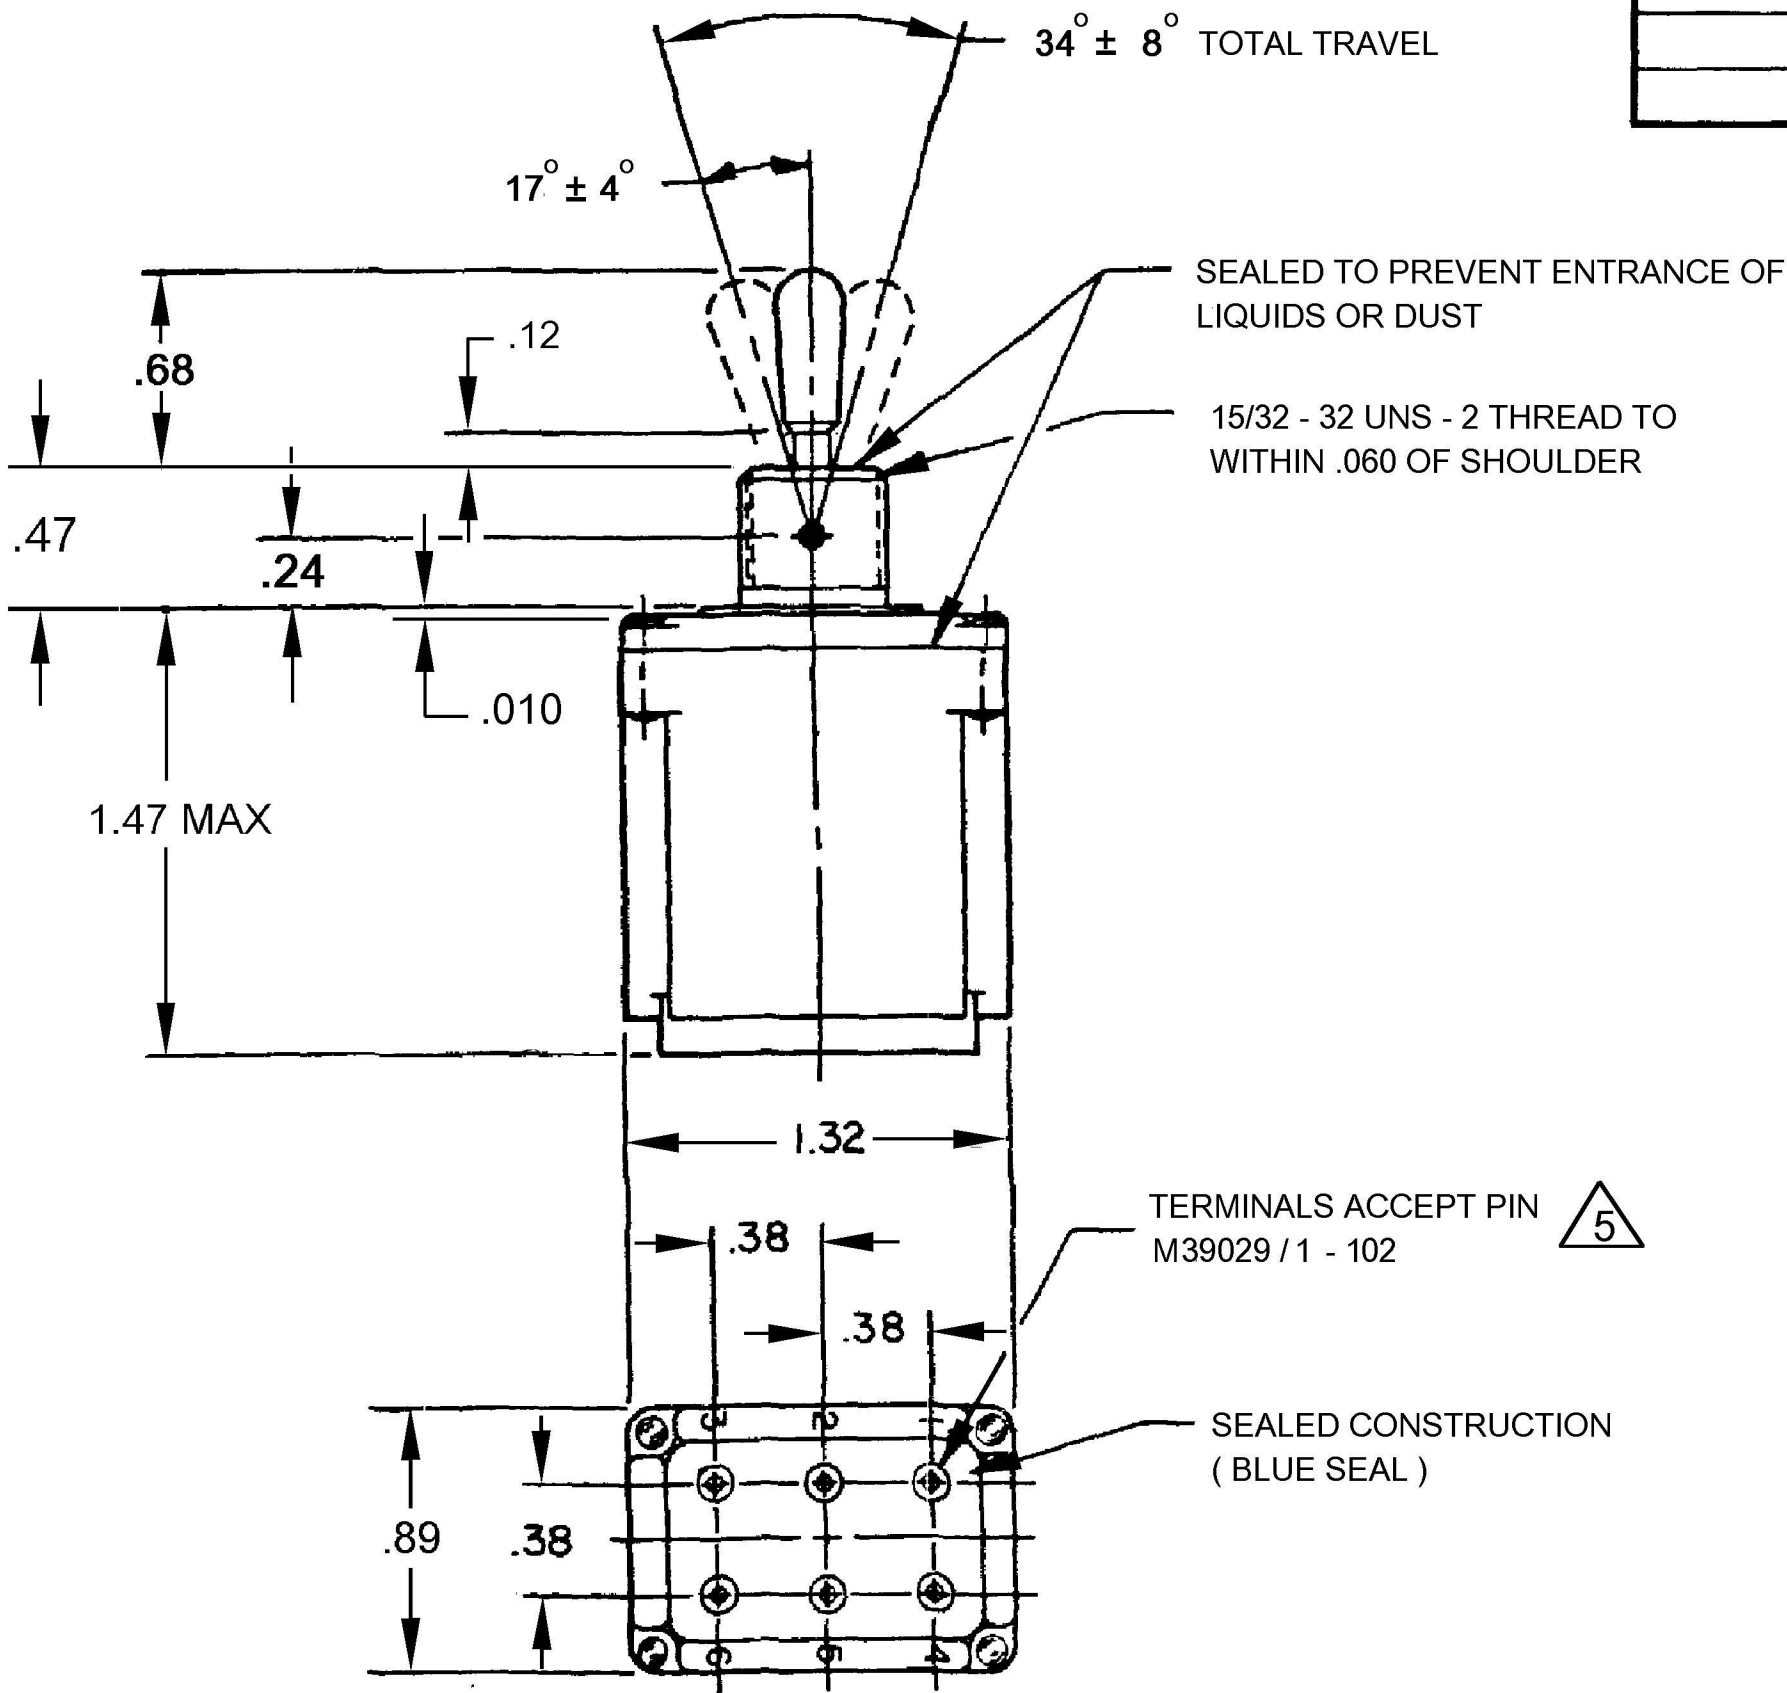

- NOTES :
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
  - 2 - CIRCUIT DESIGNATION, MICRO SWITCH CATALOG LISTING AND DATE CODE STAMPED ON SIDE OF SWITCH
  -  FURNISHED UNASSEMBLED
  -  -APPLIES ONLY TO " ON" AND "MOMENTARY ON" POSITIONS
  -  -THE SEALING GROMMET SHALL SEAL ON A SMOOTH WIRE INSULATION OF .068 TO .103 DIAMETERS ( 14 - 16 GAGE )
  - 6 - UNUSED TERMINAL HOLES MAY BE SEALED WITH PLUGS M83723 / 28 -16

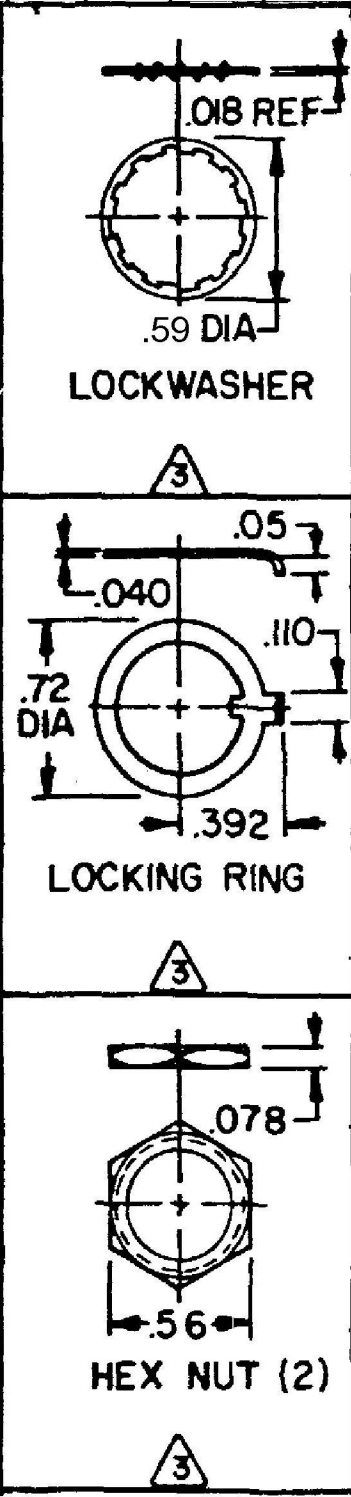

DESIGN UNITS: INCH  
TOLERANCES UNLESS NOTED:  
NO PLACE X ± 0.040  
ONE PLACE .X ± 0.030  
TWO PLACE .XX ± 0.015  
THREE PLACE .XXX ± 0.005  
FOUR PLACE .XXXX ± 0.0005  
ANGLES ± 2

THIRD ANGLE PROJECTION  


DRAWN KRB 04 DEC 08  
CHECK MJS 04 DEC 08

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

**Honeywell**

TITLE SWITCH, TOGGLE

SIZE C TYPE I DRAWING NAME 15PA320- TL REV A

SCALE NTS SHEET 1 OF 1