

PULSE SWITCH (ADJUSTABLE)

CATALOG LISTING

1PD1

1PD1

M

DRAWING
NUMBER

9

ISSUE

RELEASE NO.

CHECK

REVISIONS

A	C021632	O M W	25 JUL 66
B	C026023-A	D L F	25 JUL 69
C	C045869B	G J W	7 JUL 79
D	C082531B	J A K	19 FEB 97

CHECK

26 JUL 66

26 JUL 66

26 JUL 66

26 JUL 66

26 JUL 66

26 JUL 66

26 JUL 66




26 JUL 66

26 JUL 66

26 JUL 66

26 JUL 66

FORMTEK

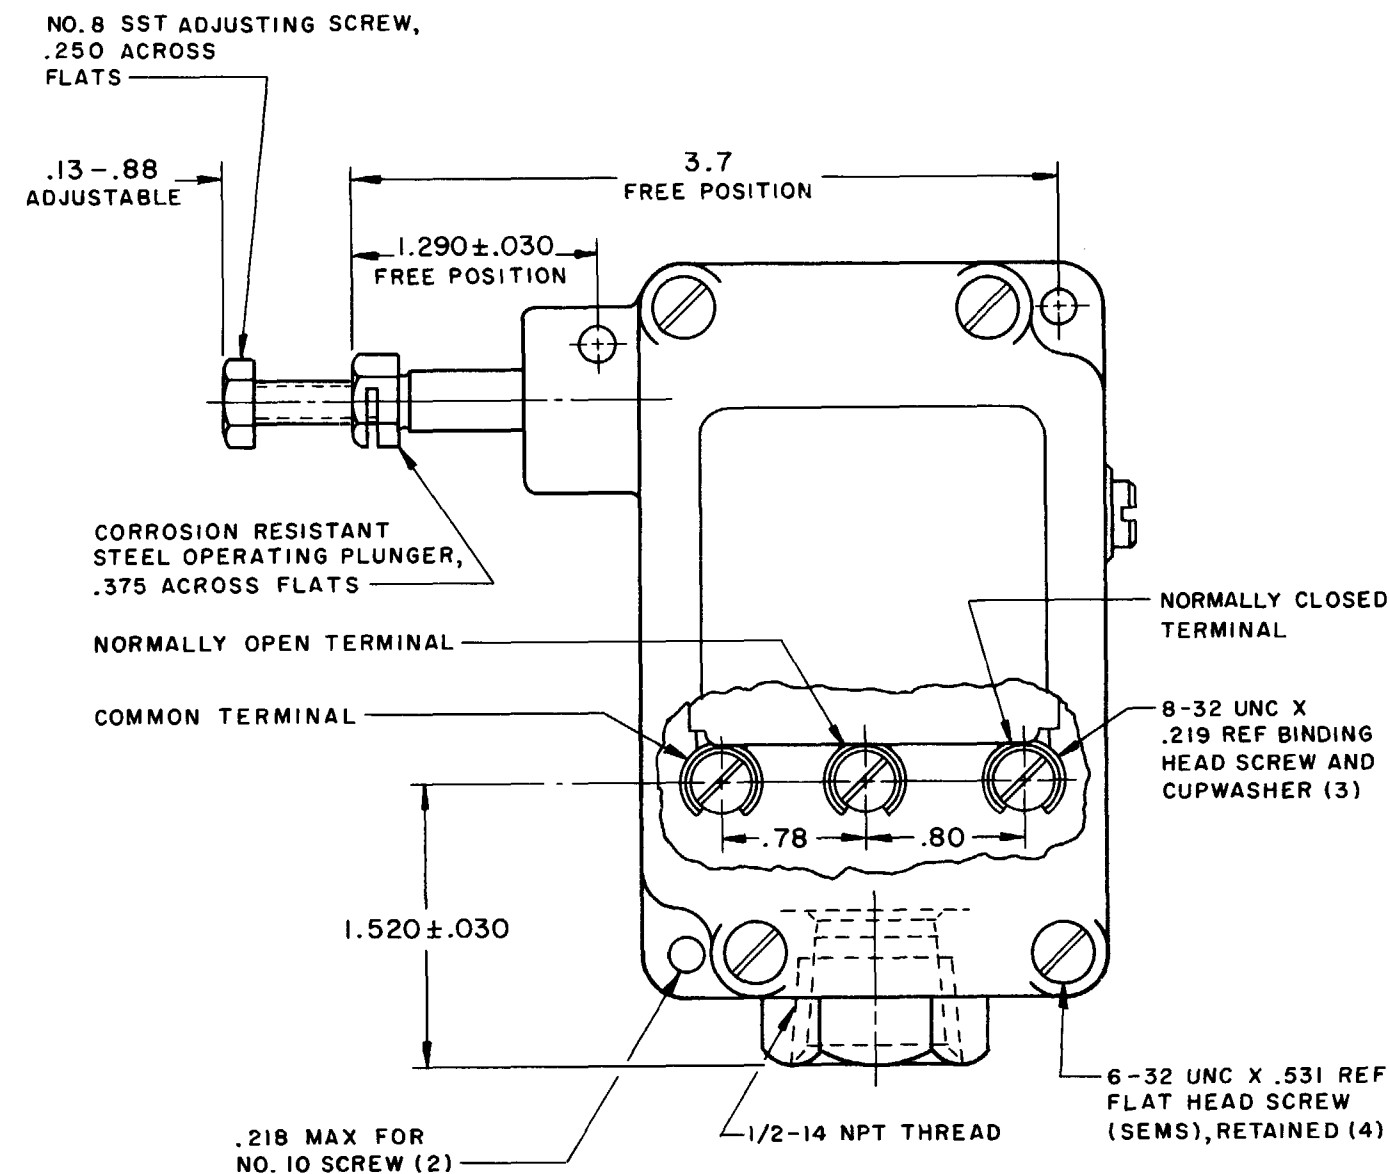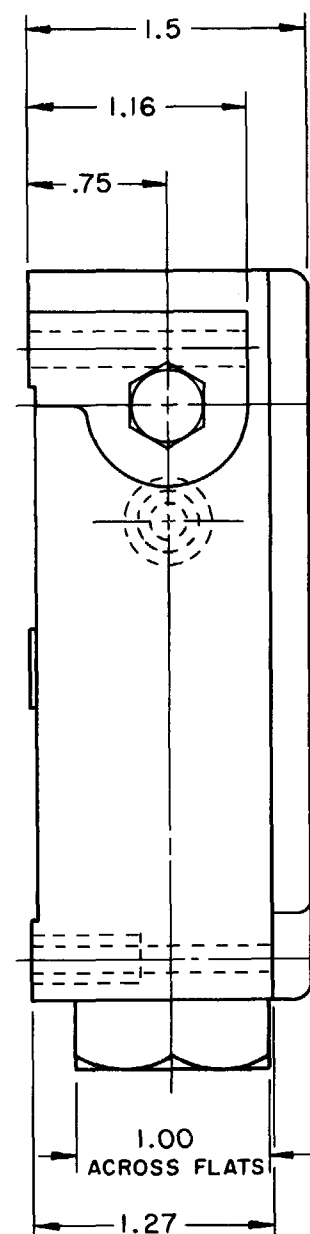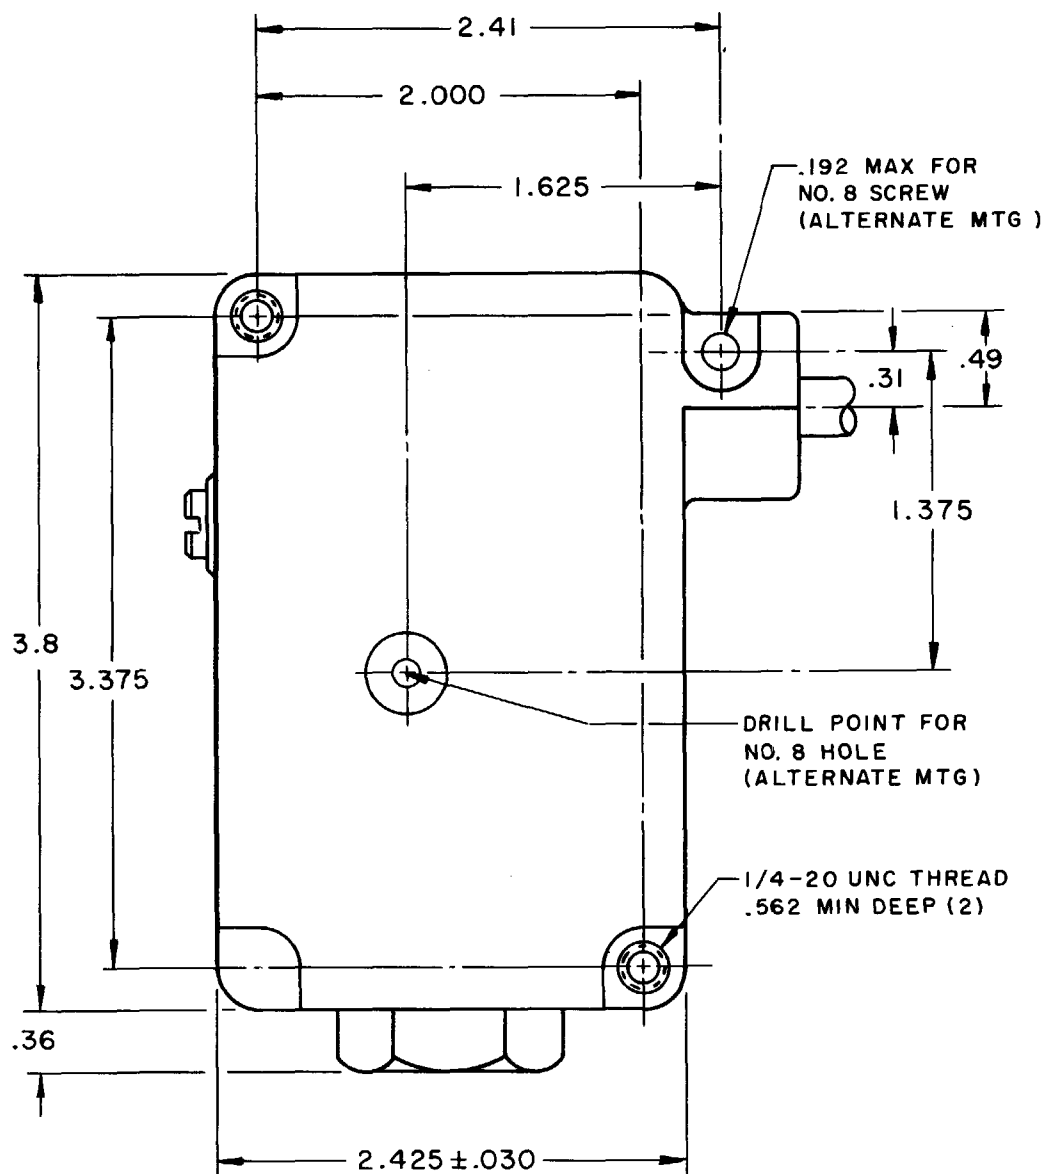

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 3 1/2 LB MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
PRETRAVEL - - - - - .110 MAX		UNLESS OTHERWISE NOTED
PULSE POSITION - - - ADJUSTABLE FROM .030 - .450 BEYOND OPERATING POSITION		DIMENSIONS ARE IN INCHES
FORCE AT PULSE POSITION - - - - - 6 LB MAX	15 A-125, 250 OR 480 VAC	TOLERANCES ARE:
SWITCH-BASIC REPLACEMENT - BZ-2RD776-P4	1/2 A-125 VDC; 1/4 A-250 VDC	ONE PLACE (.0) ±.030
	1/8 HP-125 VAC; 1/4 HP-250 VAC	TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLES ±.005
		WEIGHT

NOTES

- 1- ALUMINUM HOUSING AND COVER FINISHED IN GRAY PAINT
- 2- IT IS ESSENTIAL TO PREVENT ENTRANCE OF HARMFUL AGENTS THRU THE CONDUIT OPENING TO OBTAIN THE FULL BENEFIT OF THE SEALED CONSTRUCTION PROVIDED IN THIS UNIT