

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PINEBROOK, ALABAMA

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

2 MN14

5

2 MN14

M

DRAWING
NUMBER

X 8

X 4

ISSUE

X 4

REPLACES

RELEASE NO. SR10012

CHECK

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62

13 FEB 62





13 FEB 62

13 FEB 62

13 FEB 62


13 FEB 62

13 FEB 62

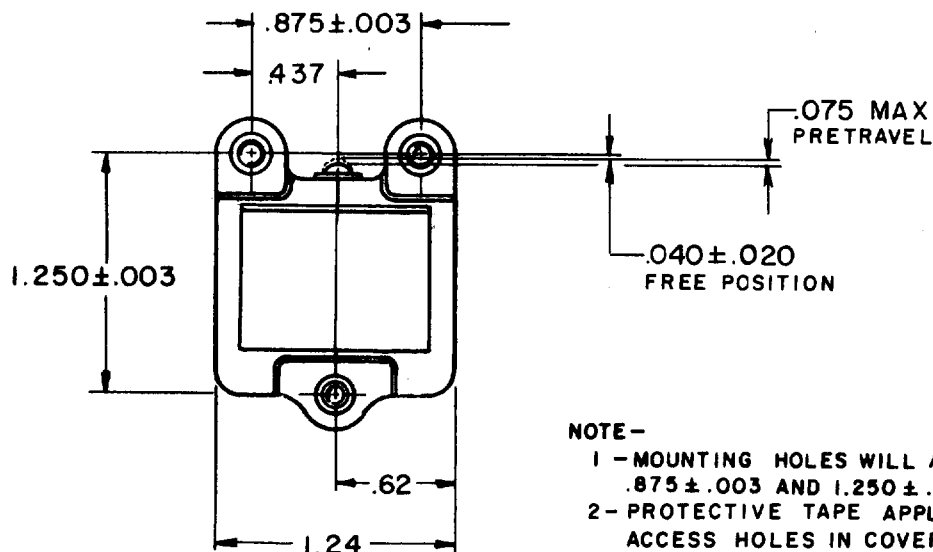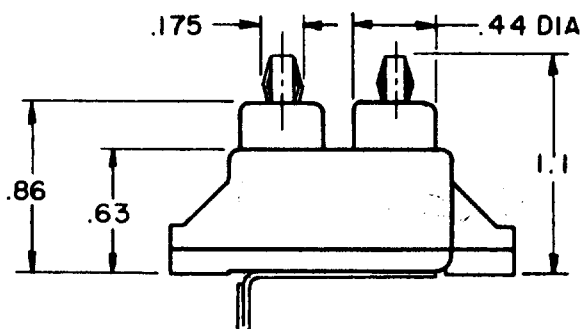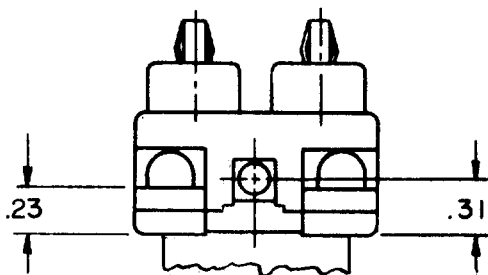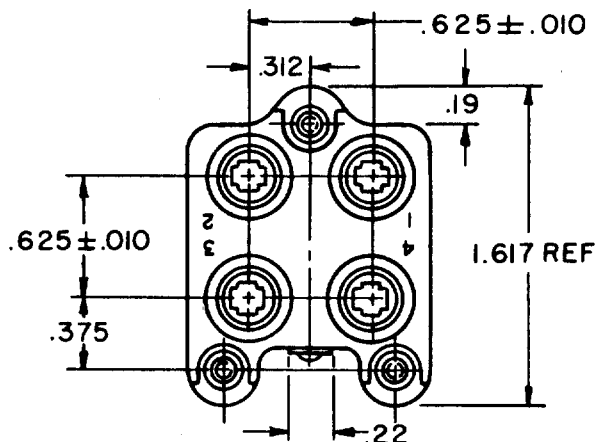

NOTE -

- 1 - MOUNTING HOLES WILL ACCEPT NO.4 SCREWS ON .875 ± .003 AND 1.250 ± .003 CENTER
- 2 - PROTECTIVE TAPE APPLIED OVER INDICATOR LIGHT ACCESS HOLES IN COVER



CIRCUIT DIAGRAM

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 16 - 24 OZ
RELEASE FORCE - - - - - 10 OZ MIN
DIFFERENTIAL TRAVEL - - - - .011 - .020
OVERTRAVEL - - - - - .017 MIN
RELEASE TRAVEL - - - - - .022 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM
BREAK DISTANCE
.015 MIN (2)
10 A - 120, 240, OR 480 VAC; 1/2 HP - 120 VAC
1 HP - 240 VAC; 0.8 A - 115 VDC; 0.4 A - 230 VDC
0.1 A - 550 VDC
PILOT DUTY: 600 VAC MAX

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT