



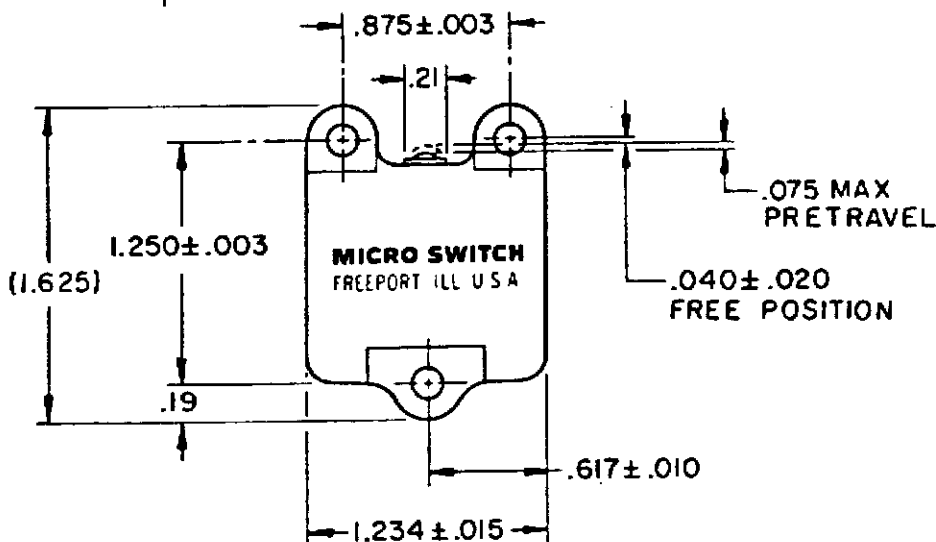


4X 8-32 UNC PAN HEAD SCREW AND  
CLAMPING PRESSURE PLATE

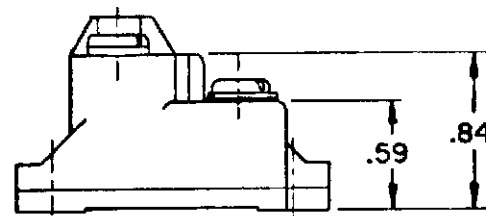

**CIRCUIT DIAGRAM**

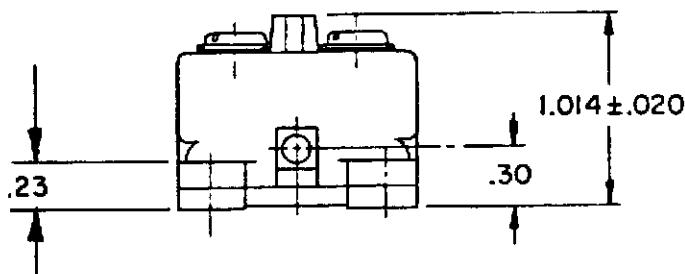


**NOTE**

- 1 - MOUNTING HOLES WILL ACCEPT NO. 4 SCREWS ON  $.875 \pm .003$  AND  $1.250 \pm .003$  CENTERS
- 2 - UL 508 RATING APPLIES TO THE BASIC SWITCH ONLY. U.L. RATING DOES NOT COVER ANY DEVICE THE BASIC SWITCH MAY BE USED IN

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



**CHARACTERISTICS**

OPERATING FORCE — — — — 16-24 OZ  
RELEASE FORCE — — — — 10 OZ MIN  
DIFFERENTIAL TRAVEL — — — .011-.020  
OVERTRAVEL — — — — .017 MIN  
RELEASE TRAVEL — — — — .022 MIN

**ELECTRICAL DATA**

CONTACT ARRANGEMENT  
SEE CIRCUIT DIAGRAM

10A 120, 240, OR 480 VAC  
1/2 HP 120 VAC, 1 HP 240 VAC  
0.8A 115 VDC, 0.4A 230 VDC -  
0.1A 550 VDC  
PILOT DUTY 600 VAC MAX  
LIST.MAN. MTR. CNTLR. A156



**SCALE FULL**

DO NOT  
SCALE PRINT

UNLESS OTHERWISE SPECIFIED  
TOLERANCES ARE

ONE PLACE (.0)  $\pm .030$   
TWO PLACE (.00)  $\pm .015$   
THREE PLACE (.000)  $\pm .005$   
ANGLES  $\pm$

WEIGHT

FILE #E22779

2MN2

CATALOG LISTING

PAGE 1 OF 1

REPLACES

RELEASE NO.

CHECK

CHECK

8 MAY 95

JAF

CHECK

20 APR 95

RASTER

DRAWN

GJW