

MICRO SWITCH


A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
POMONA, CALIFORNIA
FED. MFR. CODE 91929

SWITCH - BASIC





CATALOG LISTING

2 MN 7

5



Circuit Diagram

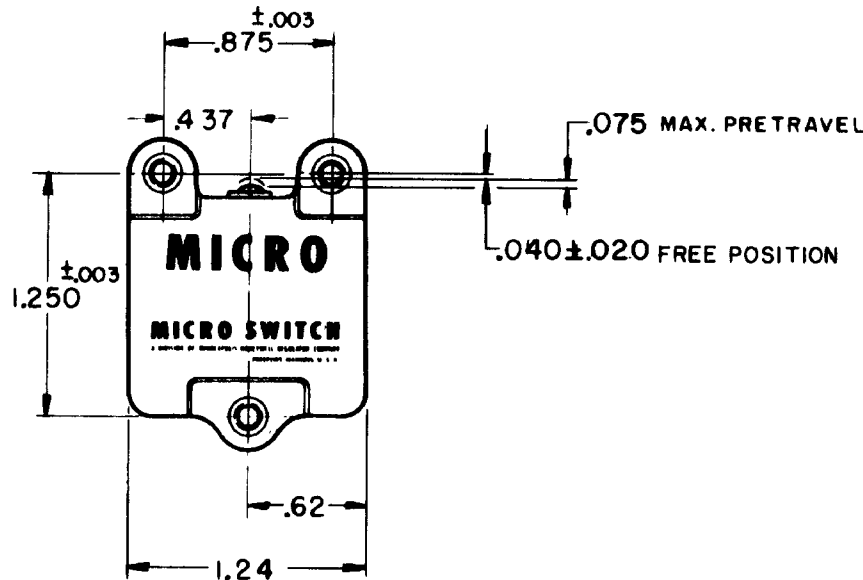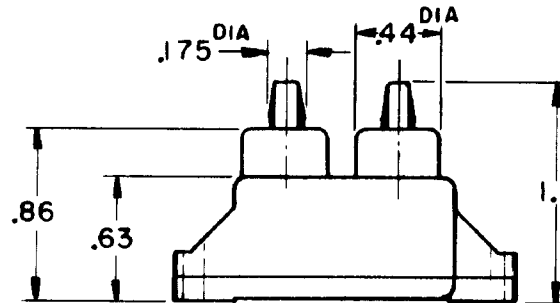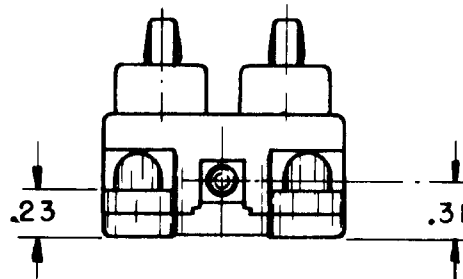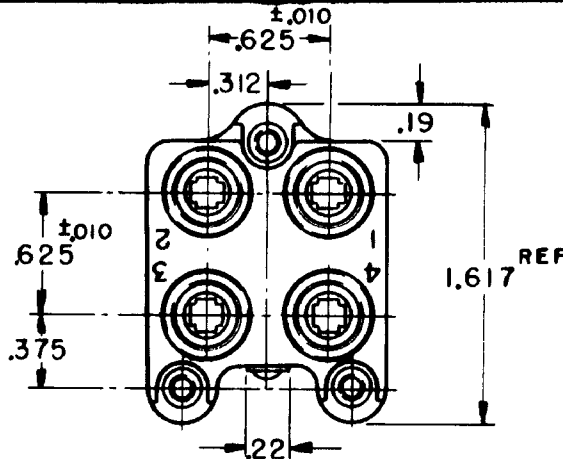

NOTE:

1- MOUNTING HOLES WILL ACCEPT NO. 4 SCREWS
ON .875^{±.003} AND 1.250^{±.003} CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE-----16-24 OZ
RELEASE FORCE-----10 OZ MIN
DIFFERENTIAL TRAVEL-----.005-.009
OVERTRAVEL-----.017 MIN
RELEASE TRAVEL-----.022 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

10 A-120, 240, OR 480 VAC
1/2 HP-120 VAC; 1 HP-240 VAC
PILOT DUTY: 600 VAC MAX

SCALE - FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

2 MN 7

M

DRAWING
NUMBER

2

X 5

ISSUE

X 5

REPLACES

RELEASE NO. SR 8039

CHECK

REVISIONS

A C.O.15776

K L R

18 APR 61

B C.O.16413

M B F

26 OCT 61

C C.O.23123

ORD

21 MAR 62

D C.O.25182

G F S

11 FEB 69

CHECK

26 JAN 59

CHECK

23 JAN 59

CHECK

23 JAN 59

CHECK

23 JAN 59

CHECK

23 JAN 59

FO-50378