
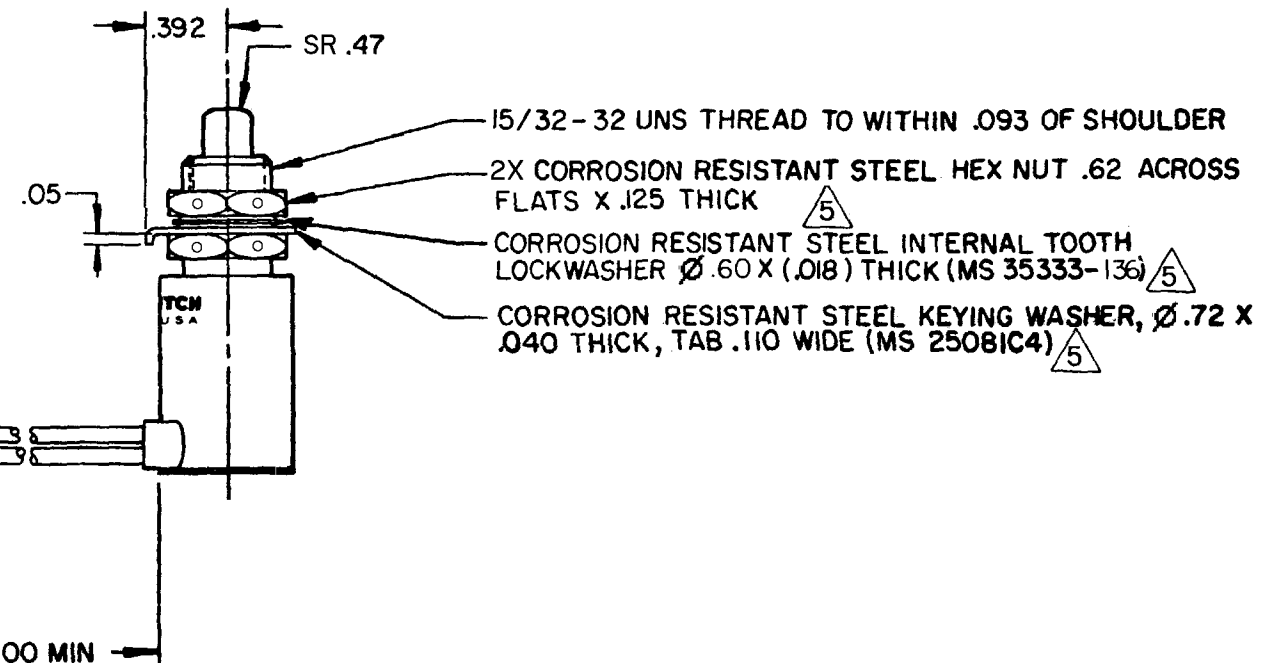
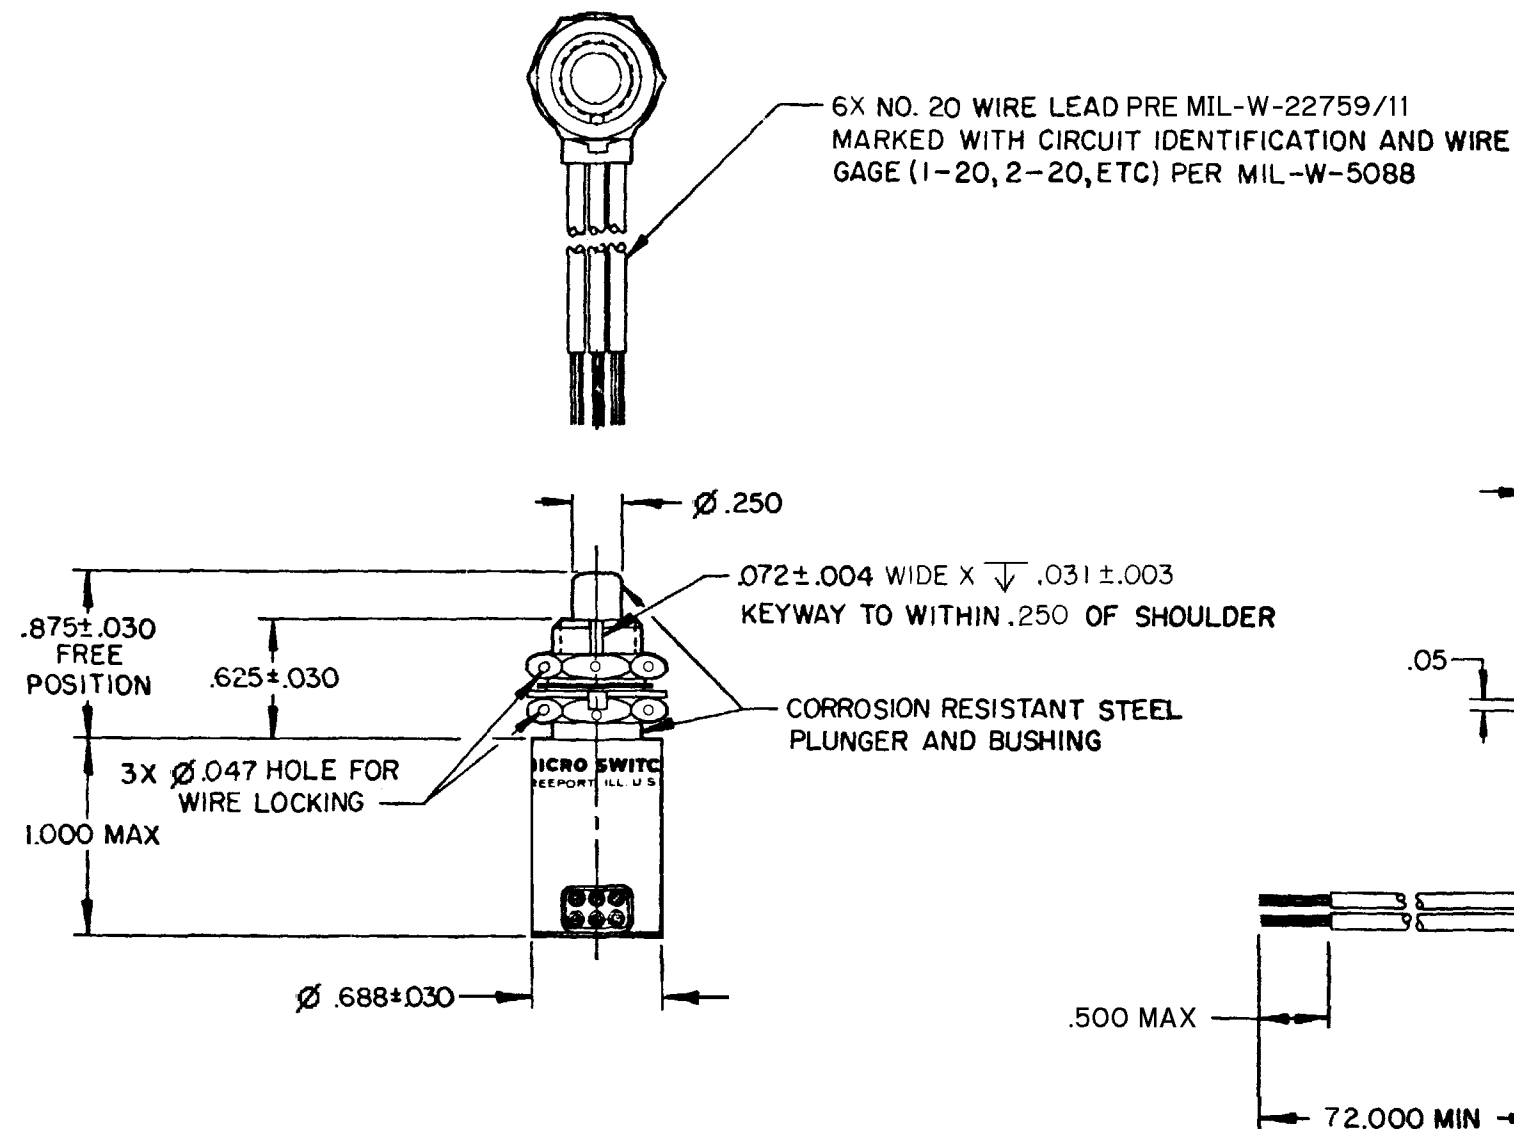


**MICRO SWITCH**  
FREEPORT ILLINOIS U S A  
A DIVISION OF HONEYWELL  
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING  
602EN16-6



- NOTES**
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
  - 2 - CIRCUIT DIAGRAM, CAT. LIST., FED. MFG. CODE AND DATE CODE ARE PERMANENTLY MARKED ON SIDE OF HOUSING
  - 3 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
  - 4 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
  - 5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		THIRD ANGLE PROJECTION		SCALE FULL	
CHARACTERISTICS		ELECTRICAL DATA		DO NOT SCALE PRINT	
OPERATING FORCE — — — — 6-12 LB		CONTACT ARRANGEMENT		TOLERANCES	
FULL OVERTRAVEL FORCE — — — — 30 LB MAX		2X SPDT		APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2	
RELEASE FORCE — — — — 4 LB MIN		28 VDC		DIM. TOL. DIM. TOL.	
PRETRAVEL — — — — .040 MAX		SEA LEVEL 50,000 FT.		NO PLACES X 1/64 .001	
DIFFERENTIAL TRAVEL — — — — .020 MAX		RES 7 7		ONE PLACE X, X 0.4/0.016 .001	
OVERTRAVEL — — — — .125 MIN		IND 4 2.5		TWO PLACES X, XX 0.15/0.008 .001	
		MOTOR 4		THREE PLACES X, XXX 0.13/0.008 .001	
				DESIGN UNITS SI METRIC US CUSTOMARY	
				RAW MATERIAL—COMMERCIAL STANDARD	
				MICRO SWITCH STANDARDS APPLY	
				DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED	
				WEIGHT 6.2 OZ MAX	

ANSI Y14.5M-1982 APPLIES

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[602EN16-6](#)