



MICRO SWITCH
FREEPORT ILLINOIS
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ACTUATOR-SWITCH

CATALOG LISTING

JS-6-B

JS-6-B

M

DRAWING
NUMBER

ISSUE

X2

REPLACES

RELEASE NO. SR 10668

CHECK

62

6 DEC '62

CHECK

BRJ

6 DEC '62

CHECK

DAW

6 DEC '62

CHECK

LMH

5 DEC 62

CHECK

DAW

6 DEC '62

CHECK

LMH

5 DEC 62


CHECK

LMH

5 DEC 62

DRAWN

FO-80378

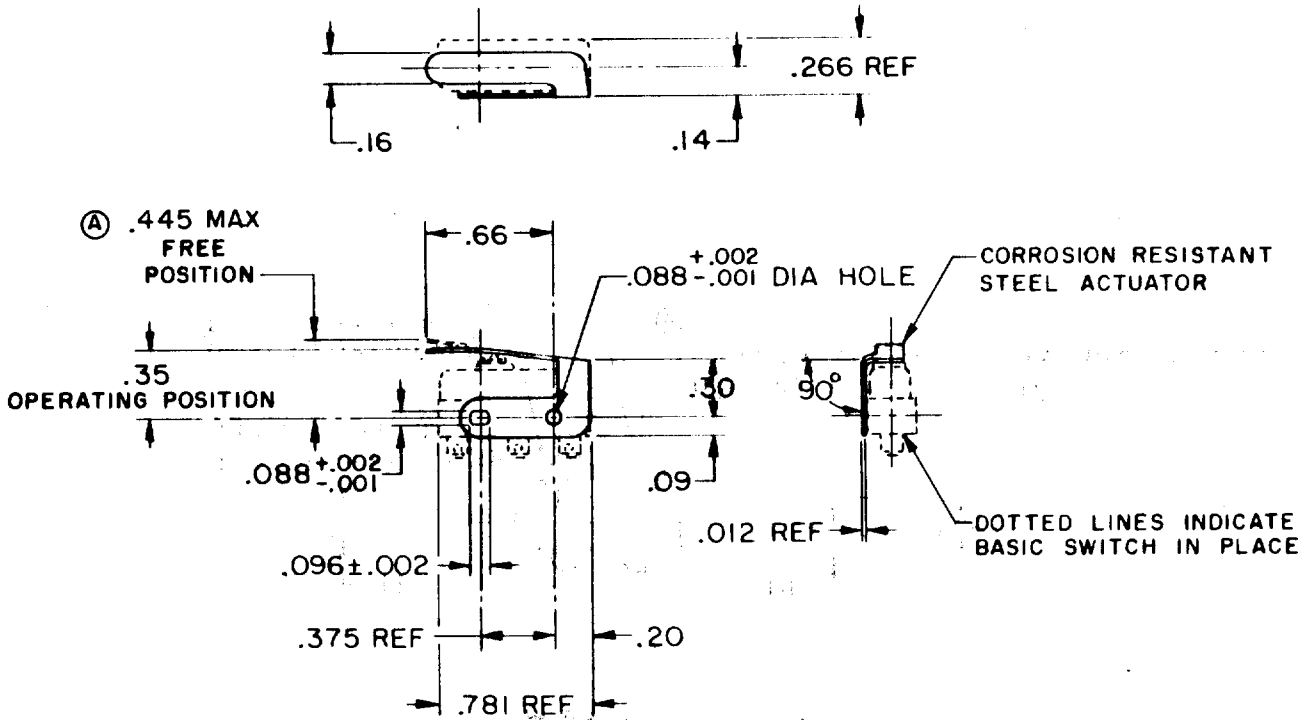

NOTE—
1-FURNISHED BULK PACKED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS WITH ISMI BASIC SWITCH INSTALLED

OPERATING FORCE-----10 OZ MAX
RELEASE FORCE-----① 2 OZ MIN
PRETRAVEL-----.078 MAX
DIFFERENTIAL TRAVEL-----.015 MAX
OVERTRAVEL-----.015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT BREAK DISTANCE

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ± 2°

WEIGHT

CHARACTERISTICS SWITCH INSTALLED

OPERATING FORCE-----10 OZ. MAX.
① RELEASE FORCE-----2 OZ. MIN.
PRETRAVEL-----.094 MAX.
DIFFERENTIAL TRAVEL-----.015 MAX.
OVERTRAVEL-----.015 MIN.
②

ELECTRICAL DATA

CONTACT ARRANGEMENT BREAK DISTANCE

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ± 1°

DRAWN

E.R. 23 FEB. 56 CH