

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PREEPORT, ILLINOIS

FED. MFR. CODE 91929

ACTUATOR - SWITCH

CATALOG LISTING

JS-87

(M) JS-87
ISSUE 2

REPLACES

RELEASE NO. SR 8276

JS-87

M

DRAWING
NUMBER

ISSUE

5

REVISIONS

A CO47771

CJH
17 MAY 80

B C079303

DLT
7 MAR 95

CHECK

14 OCT 58

CHECK

1 JUN 59

CHECK

28 MAY 59


DRAWN

FO-50378

2-56 NC X .688 REF ROUND HEAD MACHINE
SCREW (2) $\triangle$


2-56 NC HEX NUT (2) $\triangle$

LOCKWASHER (2) $\triangle$

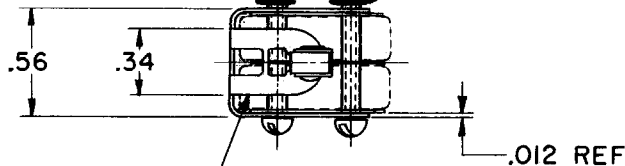

CORROSION RESISTANT STEEL ACTUATOR

.19 DIA X .12 WIDE CORROSION RESISTANT
STEEL ROLLER (CONCENTRICITY .005 T I R)

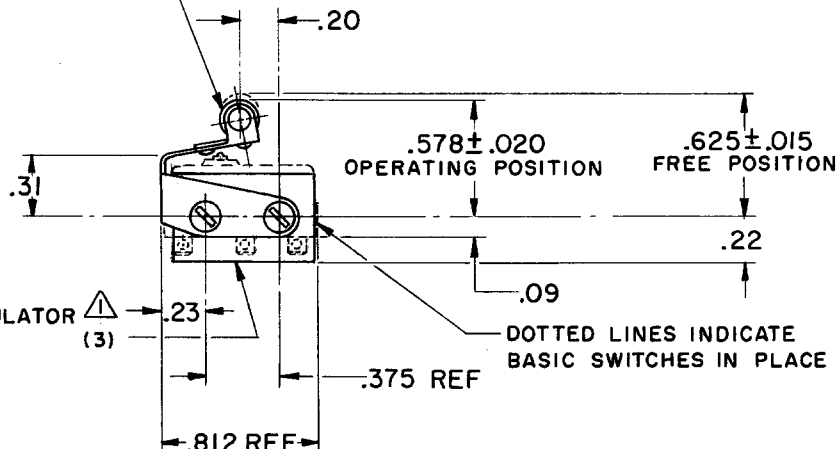

FLEXIBLE INSULATOR $\triangle$
(3)

DOTTED LINES INDICATE
BASIC SWITCHES IN PLACE

NOTE -
 $\triangle$ - FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS WITH ISMI BASIC SWITCH INSTALLED(2)

OPERATING FORCE-----1.5 LB MAX

RELEASE FORCE-----2 OZ MIN

PRETRAVEL-----.078 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT

BREAK DISTANCE

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.008
ANGLES		±

WEIGHT