


Low-Drop LED Driver

TLE 4240 G

Target Data

Features

- Output current tolerance $\leq \pm 20\%$
- 60 mA output current
- Low drop voltage
- Suitable for use in automotive electronics
- Wide operation range: up to 45 V
- Wide temperature range: $-40\text{ }^{\circ}\text{C} \leq T_j \leq 150\text{ }^{\circ}\text{C}$
- Output protected against short circuit
- Overtemperature protection
- Reverse polarity proof
- Very small SMD-Package SCT 595
- Status output for open Load

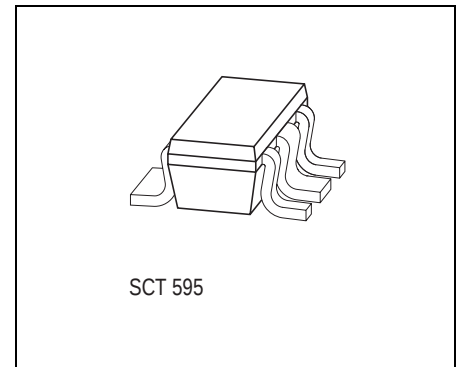

Type	Ordering Code	Package
▼ TLE 4240 G		SCT-595 (SMD)

▼ New type

Functional Description

The TLE 4240 G is a monolithic integrated low-drop LED Driver in the very small SMD package SCT 595. It is designed to supply LEDs under the severe conditions of automotive applications. Therefore the device is equipped with additional protection functions against overload, short circuit and reverse polarity and overtemperature.

The output is a constant current source which drives LEDs to 60 mA within an accuracy of $\pm 20\%$.

Pin Configuration (top view)

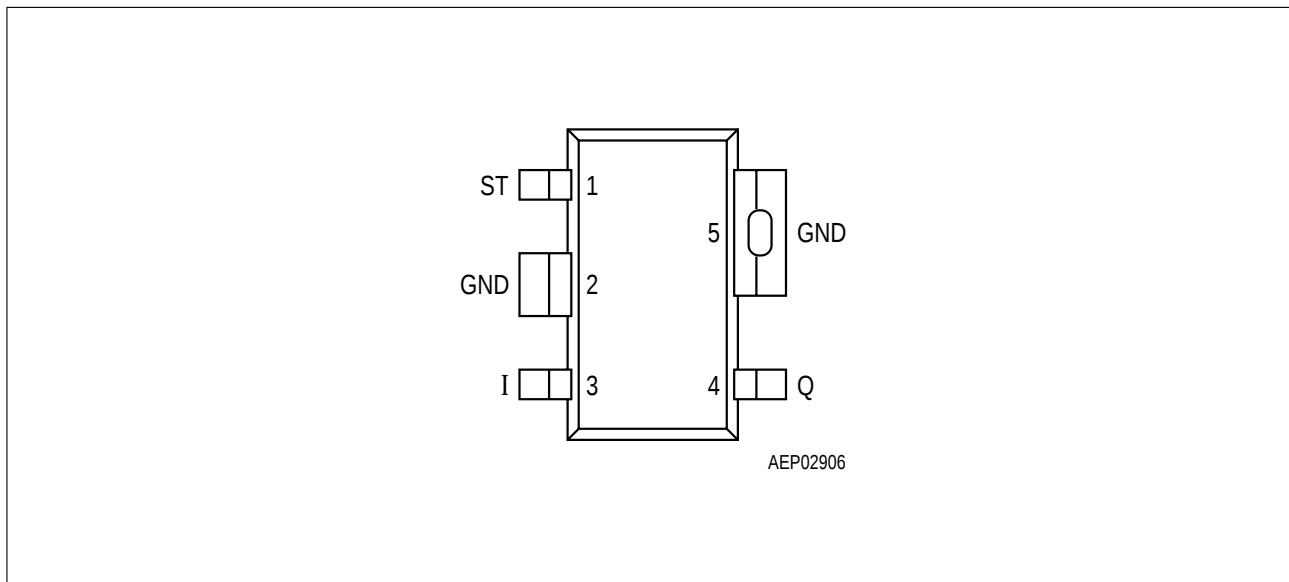


Figure 1

Pin Definitions and Functions

Pin No.	Symbol	Function
1	ST	Status output ; low level for open load
2	GND	Ground ; internally connected to pin 5
3	I	Input voltage
4	Q	Output
5	GND	Ground



Figure 2 Block Diagram

Absolute Maximum Ratings
 $-40\text{ }^{\circ}\text{C} < T_j < 150\text{ }^{\circ}\text{C}$

Parameter	Symbol	Limit Values		Unit	Remarks
		min.	max.		

Input

Voltage	V_I	- 42	45	V	–
Current	I_I	–	–	mA	internally limited

Output

Voltage	V_Q	- 1	40	V	–
Current	I_Q	–	–	mA	internally limited

Status

Voltage	V_{ST}	- 0.3	40	V	–
Current	I_{ST}	- 5	5	mA	internally limited

Temperatures

Junction temperature	T_j	- 40	150	$^{\circ}\text{C}$	–
Storage temperature	T_{stg}	- 50	150	$^{\circ}\text{C}$	–

Thermal Resistances

Junction ambient	R_{thja}	–	179	K/W	zero heat sink area, zero airflow
------------------	------------	---	-----	-----	--------------------------------------

Note: Maximum ratings are absolute ratings; exceeding any one of these values may cause irreversible damage to the integrated circuit.

Operating Range

Parameter	Symbol	Limit Values		Unit	Remarks
		min.	max.		
Input voltage	V_I	3	45	V	–
Status output voltage	V_{ST}	–	7	V	–
Junction temperature	T_j	– 40	150	°C	–

Electrical Characteristics

$V_I = 13.5 \text{ V}$; $-40 \text{ °C} < T_j < 150 \text{ °C}$; unless otherwise specified

Parameter	Symbol	Limit Values			Unit	Test Condition
		min.	typ.	max.		


Output

Drop voltage	V_{dr}	–	0.5	0.7	V	$I_Q = 60 \text{ mA}$
Output current	I_Q	53	66	79	mA	$9 \text{ V} < V_I < 16 \text{ V}$ $T_j < 125 \text{ °C}$
Current consumption $I_q = I_l - I_Q$	I_q	–	7	10	mA	$I_Q = 60 \text{ mA}$ $T_j = 25 \text{ °C}$


Status Output

Status Output Voltage	V_{ST}	–	–	0.8	V	$I_Q = 1 \text{ mA}$ $R_{ext} = 10 \text{ k}\Omega$
-----------------------	----------	---	---	-----	---	--

Current Consumption I_q versus Output Current I_Q

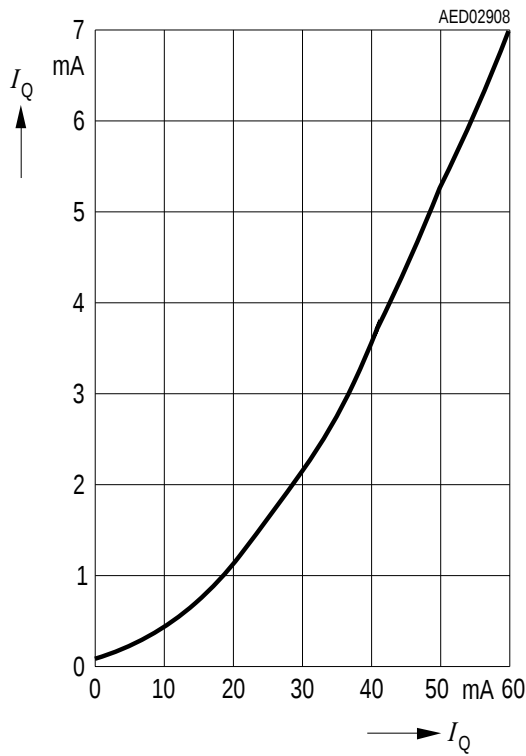


Output Current I_Q versus Input Voltage V_i

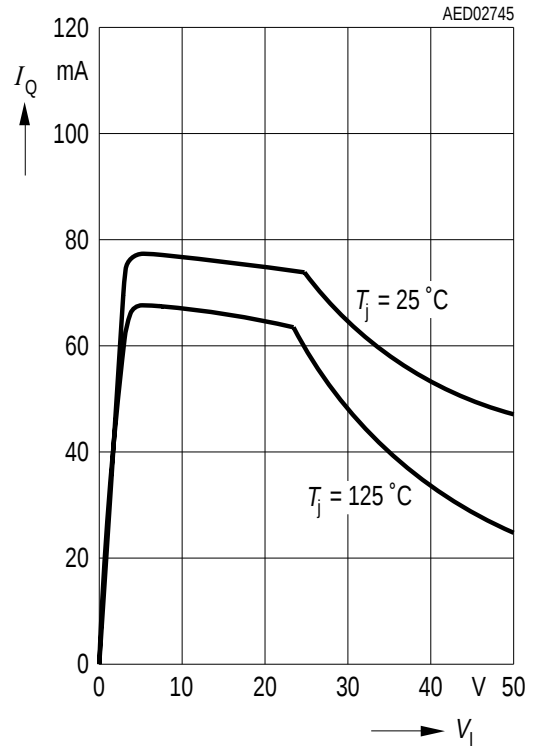

Package Outlines

SCT-595

(Special Package)

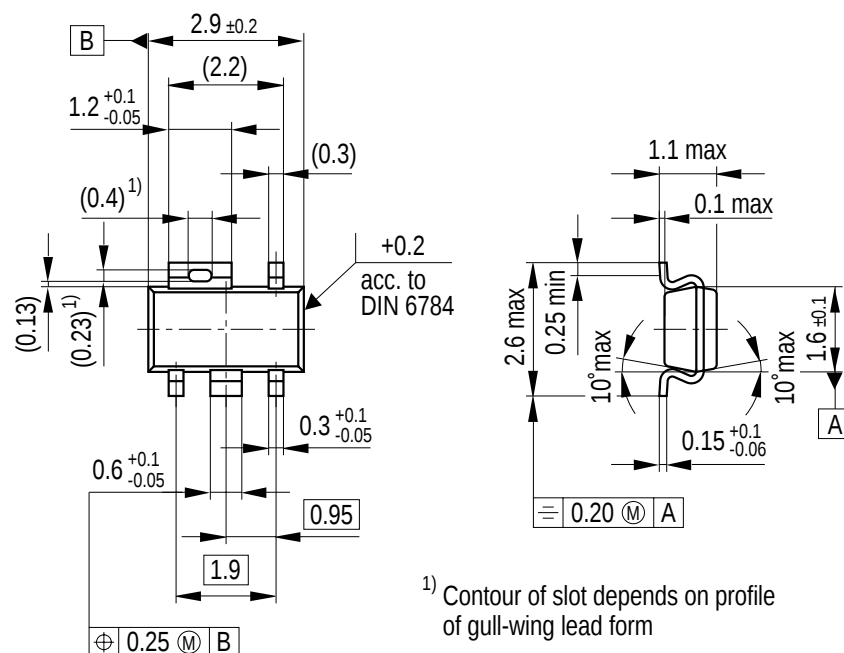

Sorts of Packing

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

SMD = Surface Mounted Device

Dimensions in mm

Edition 2000-08-10

**Published by Infineon Technologies AG,
St.-Martin-Strasse 53,
D-81541 München, Germany**

**© Infineon Technologies AG 8/18/00.
All Rights Reserved.**

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.