


Z7AL2B1692612

www.jinlong-machinery.com

- 技术要求/Technic requirement
- 1.额定电压/Rated voltage:3.0V
 - 2.额定电流/Rated current:250mA Max
 - 3.额定转速/Rated speed:12000 ± 2500rpm
 - 4.堵转电流/Stall current:680mA Max
 - 5.端子阻抗/Terminal resistance:5.5Ω(±20%)
 - 6.起动电压/Starting voltage:1.7V Max
 - 7.轴向间隙/Shaft end play:0.1~0.3mm
 - 8.导线规格/Lead spec: AWG30 UL1571
 - 9.所有尺寸为A向压紧后的尺寸(不包括轴向间隙) /Overall length is measured after counterweight being pressed against body in direction A. (Shaft end play is not included.)
 - 10.未注线性公差为/Unmarked tolerance: ± 0.1mm

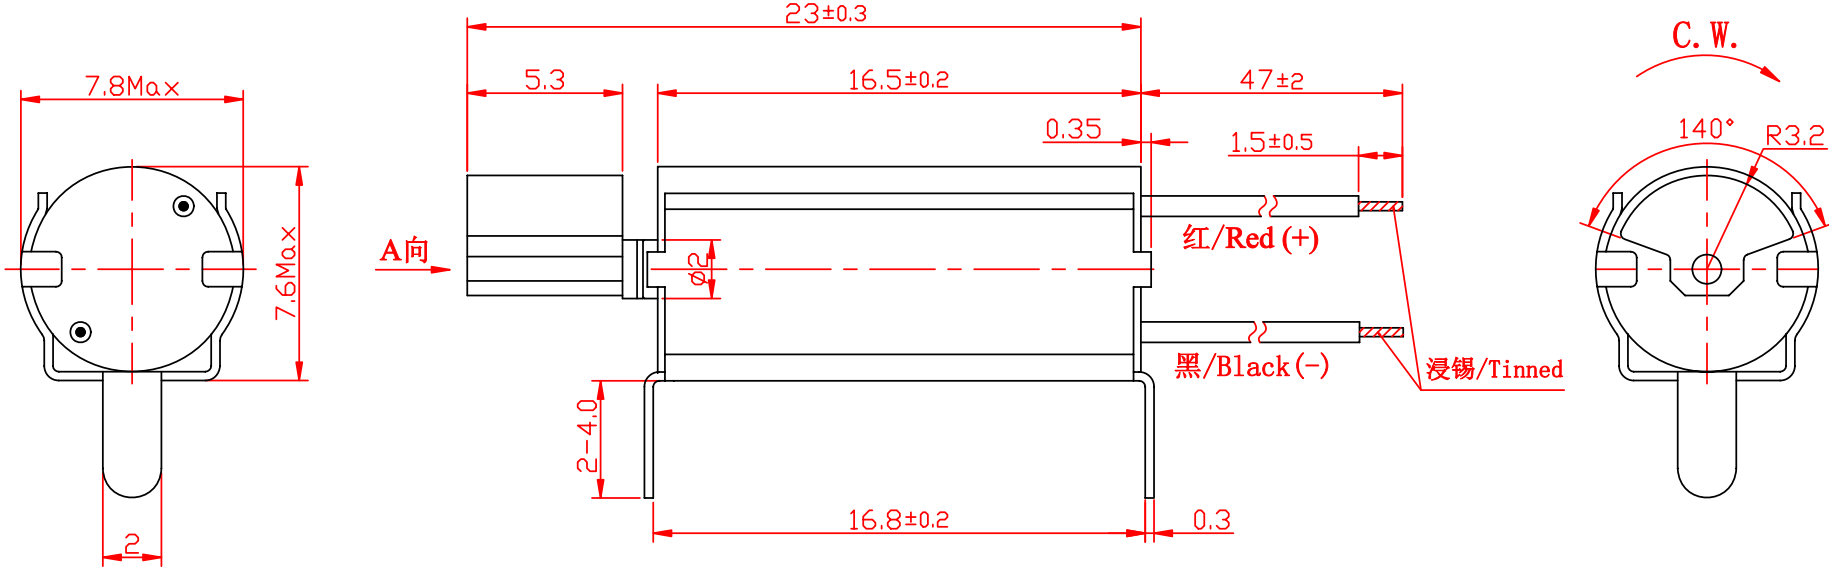

借 (通) 用件登记
底图总号
签 字
日 期

						jinlong-machinery.com			金龙机电股份有限公司	
									外 形 图	
标 记	处 数	分 区	更改文件号	签 名	日 期	阶段标记			Z7AL2B1692612	
设 计			标准化				重量	比例		
校 对								4:1		
审 核										
工 艺			批准			共 页		第 页		