


T322, Tantalum, MnO2 Tantalum, Commercial Grade, 15 uF, 20%, 15 VDC, 2.5 Ohms

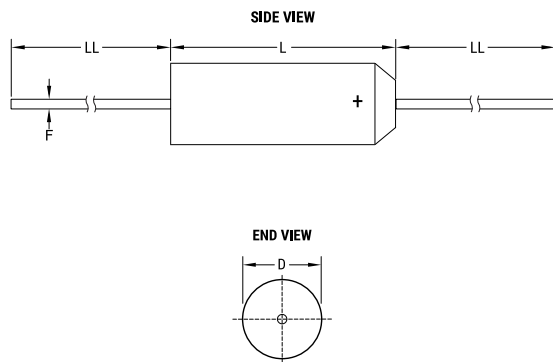

#### Dimensions

|    |                  |
|----|------------------|
| D  | 4.57mm MAX       |
| L  | 8.76mm MAX       |
| LL | 38.1mm +/-6.35mm |
| F  | 0.51mm +/-0.05mm |

#### Packaging Specifications

|                     |           |
|---------------------|-----------|
| Packaging:          | Bulk, Bag |
| Packaging Quantity: | 100       |

#### General Information

|              |                                                           |
|--------------|-----------------------------------------------------------|
| Supplier:    | KEMET                                                     |
| Series:      | T322                                                      |
| Dielectric:  | MnO2 Tantalum                                             |
| Style:       | Axial                                                     |
| Description: | Axial, Solid Tantalum, Molded, Military (Non-ER), Low ESR |
| Features:    | Low ESR                                                   |
| RoHS:        | Yes                                                       |
| Termination: | Tin                                                       |
| Lead:        | Wire Leads                                                |
| Notes:       | Uninsulated                                               |
| Shelf Life:  | 156 Weeks                                                 |

#### Specifications

|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| Capacitance:           | 15 uF                                                         |
| Capacitance Tolerance: | 20%                                                           |
| Voltage DC:            | 15 VDC (85C), 10.01 VDC (125C Surge), 0.15 VDC (125C Reverse) |
| Temperature Range:     | -55/+125C                                                     |
| Rated Temperature:     | 85C                                                           |
| Resistance:            | 2.5 Ohms (100kHz)                                             |
| Leakage Current:       | 1.5 uA (25C)                                                  |