


Capacitor, Tantalum, SMD, MnO<sub>2</sub>, Molded, Fused, 10 uF, 7343, +/-10% Tol, 25V@85C

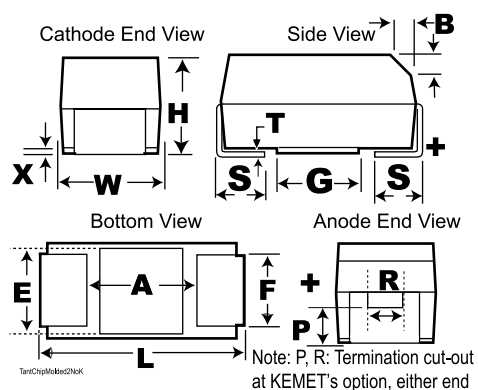

Dimensions (mm)		
Symbol	Dimension	Tolerance
L	7.3	+/- 0.3
W	4.3	+/- 0.3
H	2.8	+/- 0.3
F	2.4	+/- 0.1
S	1.3	+/- 0.3
B	0.5	+/- 0.15
X	0.1	+/- 0.1
P	0.9	REF
R	1	REF
T	0.13	REF
A	3.8	MIN
G	3.5	REF
E	3.5	REF

**Notes:**

-In polarity stripe, at KEMET's option, type may be indicated: no symbol = Standard (or low leakage) MnO<sub>2</sub> tantalum chip, O = LowESR T494, R = Low ESR T495, F = Fused T496, HT = 150C rated T498 (or B45196P, B45198P), H = 175C rated T499, M = Multiple anode construction T510 (and B45396R), KO = Organic cathode T520 or T521, KT = High temp organic cathode, KM = Multiple anode, organic cathode, FD= Organic cathode face down terminals T528.

### General Information

Supplier:	KEMET
Part Type Description:	SMD, MnO <sub>2</sub> , Molded, Fused
Construction:	Standard Chip/Fused-MnO <sub>2</sub>

### Specifications

Capacitance:	10 uF
Voltage DC @ 85C:	25V
Voltage DC @ 105C:	20.88V
Voltage DC @ 125C:	16.75V
Tolerance:	+/-10%
Application:	General Purpose
Temperature Range:	-55/+125C
Body Type:	Molded Chip
ESR:	1.2 Ohm
Footprint:	7343
Termination:	Tin
RoHS:	Yes
Leakage Current:	2.5 uA
Dissipation Factor:	6%
Ripple @ 25C:	0.354 A
Ripple @ 85C:	0.319 A
Ripple @ 105C:	0.231 A
Ripple @ 125C:	0.142 A

### Packaging Specifications

Package Kind:	T&R
Package Size:	7in
Package Quantity:	500