

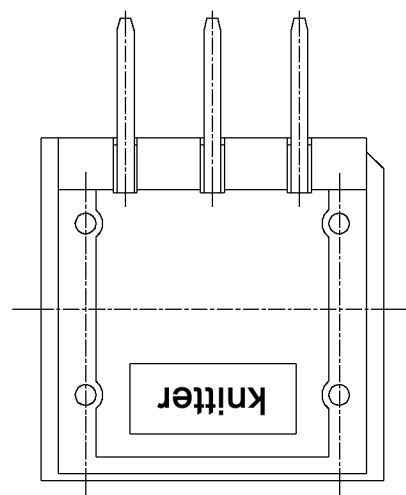
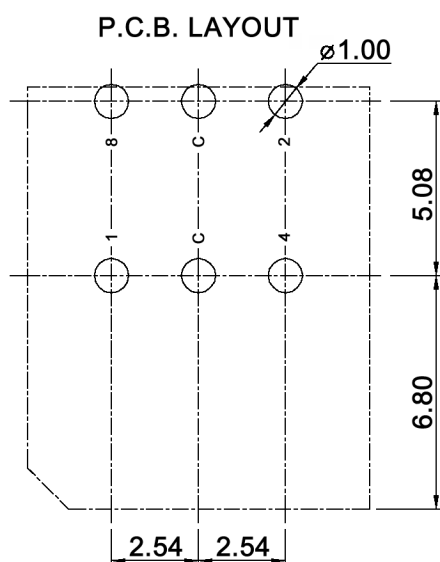


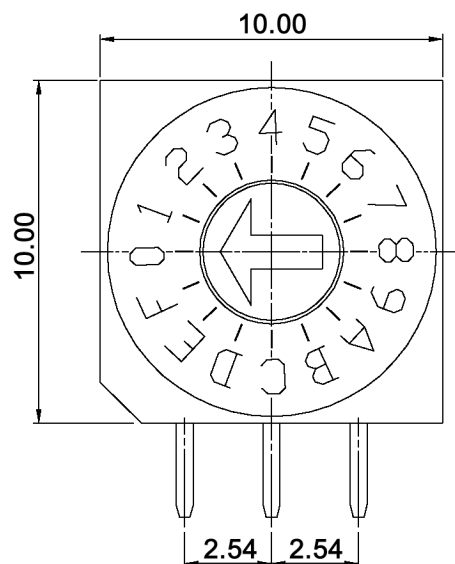

Hexadecimal		Real coded				
		C	1	2	4	8
16 Positions	0	●				
	1	●	●			
	2	●		●		
	3	●	●	●		
	4	●			●	
	5	●	●		●	
	6	●		●	●	
	7	●	●	●	●	
	8	●				●
	9	●	●			●
	A	●		●		●
	B	●	●	●		●
	C	●			●	●
	D	●	●		●	●
	E	●		●	●	●
	F	●	●	●	●	●

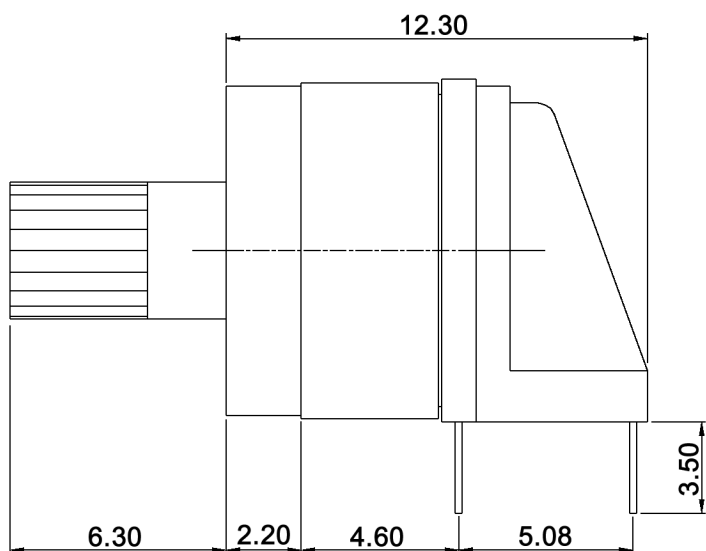

Tolerances:			Date	Name	DRR 61016	
			04/08	dr		
Soldering conditions	01/11	dr	knitter-switch		30 14 40	Page
IP rating	06/09	dr				1/2
Operating temperature	11/08	dr				
Modifications	Date	Name				

Specifications:

Contact rating: switching: 15mA, 24V DC
non-switching: 100mA, 50V DC

Contact resistance: 80mOhm max.

Insulation resistance: 100MOhm min. at 250V DC for 1 minute +/-5sec.

Dielectric strength: 250V AC (50/60Hz) for 1 minute

Operating temperature: -40°C to +85°C

Storage temperature: -40°C to +85°C

Mechanical life: 10 000 cycles

Operating force: 700gf max.

Soldering conditions: pre-heat: max. 120°C, max. 70sec.
wave soldering: max. 260°C, max. 10sec.

Material: Cover: PA66, black
Base: PA66
Actuator: POM
Contact / terminal: phosphor bronze, min. 0.07µ gold plated over
min. 0.1µ nickel plated
O-ring: silicone
PCB: epoxy seal, min. 0.05µ gold plated

IP rating: IP67



Tolerances:			Date	Name	DRR 61016
			04/08	dr	
			knitter-switch		30 14 40
					Page
					2/2
Modifications	Date	Name			