


BCD

		Real coded				
		C	1	2	4	8
10 P o s i t i o n s	0	●				
	1	●	●			
	2	●		●		
	3	●	●	●		
	4	●			●	
	5	●	●		●	
	6	●		●	●	
	7	●	●	●	●	
	8	●				●
	9	●	●			●

Specifications:

- Contact rating:** non-switching: 400mA, 42V
switching: 100mA, 42V
- Contact resistance:** 80mOhm max.
- Insulation resistance:** 100MOhm min. at 250V DC for 1 minute +/-5sec.
- Dielectric strength:** 250V DC (50Hz/60Hz) for 1 minute
- Operating temperature:** -50°C to +125°C
- Storage temperature:** -55°C to +135°C
- Mechanical life:** 25 000 cycles
- Operating force:** 120 +/-30gf/cm
- Soldering conditions:** auto-soldering: max.: 260 +/-5°C, 5 +/-1sec.
IR reflow soldering: see profile
- Packaging unit:** 70 pcs / tube
- Material:** Cover / spring plate / guide plate: stainless steel
Contact / terminal: phosphor bronze, min. 0.07µm gold plated
over min. 0.3µm nickel
- Rotor / base:** PA66
- O-ring:** silicone
- Actuator color:** pink
- Protection:** IP67

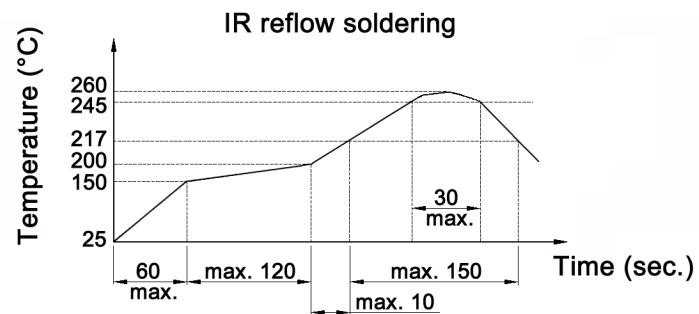

Tolerances:	Date	Name
	10/08	dr
Packaging unit	09/12	dr
Modifications	Date	Name

DRS 15010

knitter-switch

30 16 24

Page
1/1