

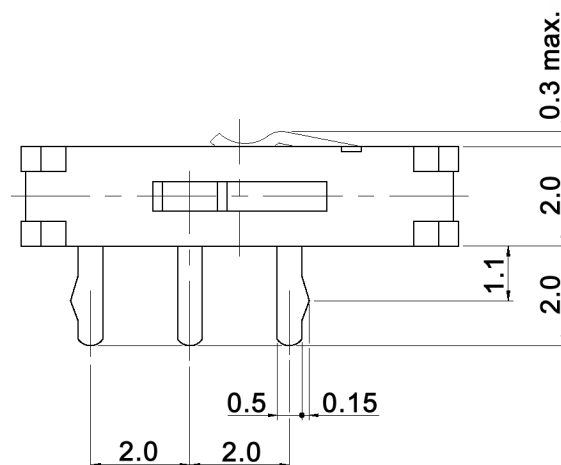
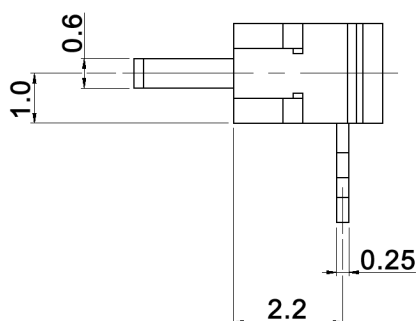


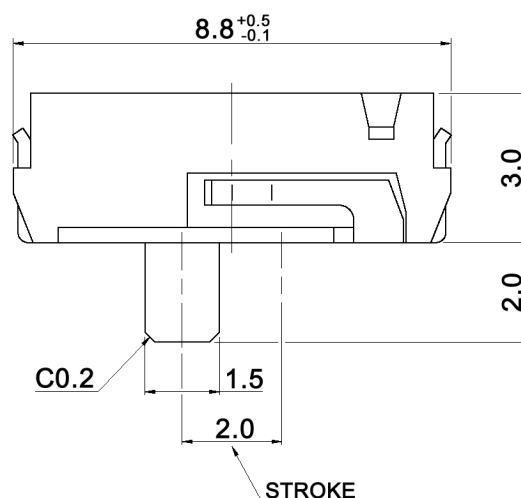


SCHEMATIC



Specifications:

Contact rating:	0.3A, 4V DC
Contact resistance:	70mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	500V AC for 1 minute
Operating temperature:	-40°C to +85°C
Mechanical life:	10 000 cycles
Operating force:	120 +/-75gf
Soldering conditions:	pre-heat: max. 100°C, max. 60sec. soldering: max. 260°C, max. 3-5sec.
Material:	Contact / terminal: copper alloy, silver plated Frame: liquid crystal polymer, black Slider: polyamide, glass fiber, white Cover: stainless steel

P.C.B. LAYOUT

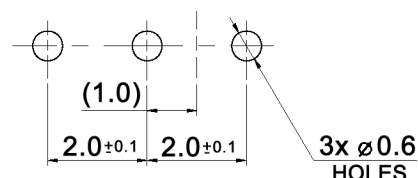

Tolerances: ±0.3mm			Date	Name	MMP 124 R	
			01/11	dr		
					30 22 77	
Modifications	Date	Name	knitter-switch		Page 1/1	