


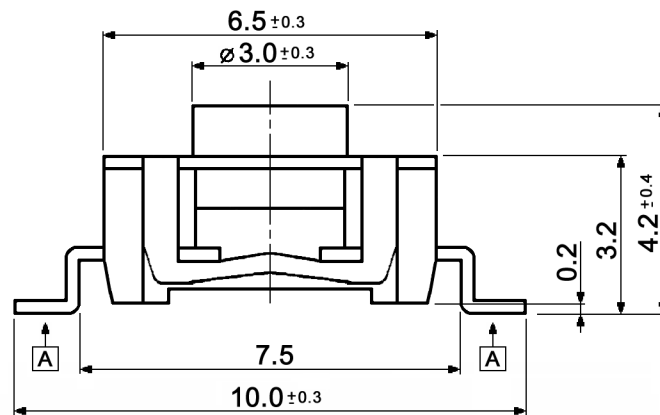
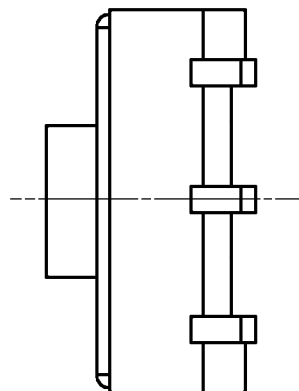


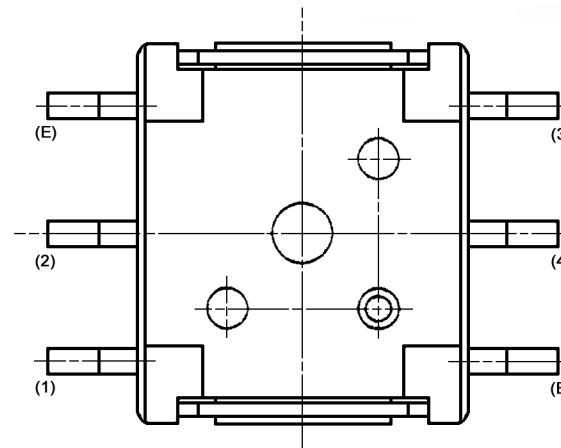

6x **A** common tolerances zone $\square \pm 0.05$

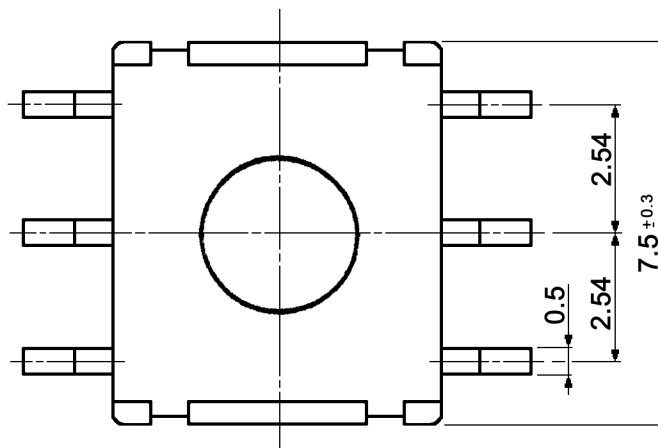


P.C.B. LAYOUT

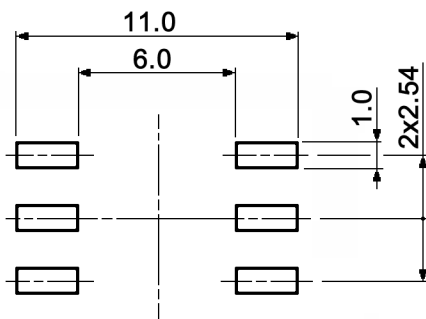


Compliance: RohS II (2011/65/EU)

Tolerances: ≤6: ±0.2mm 6-18: ±0.4mm			Date	Name	TMS 1 x	
			03/08	dr		
Contact material	06/14	dr	knitter-switch		20 25 60	Page
Soldering conditions	10/09	dr				1/2
Modifications	Date	Name				

Soldering conditions:

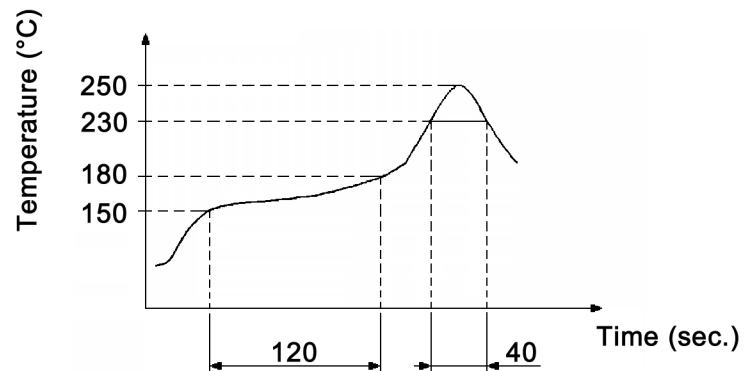

Circuit characteristics:

Circuit arrangement		Diagram	Terminals
free off	push (on)		6
—	(1) (2) (3) (4)		

Ordering code:

Ordering code	Packing
TMS 1	50 pcs. in tube
TMS 1 T	1000 pcs. in T/R packing

Compliance: RohS II (2011/65/EU)

Tolerances: ≤6: ±0.2mm 6-18: ±0.4mm			Date	Name	TMS 1 x	
			03/08	dr		
					knitter-switch	
					20 25 60	
Modifications	Date	Name				Page
						2/2