

MOLLY-W-B

~60° wide beam compatible with 3rd party connectors from BJB, Stucchi and Tridonic

TECHNICAL SPECIFICATIONS:

Dimensions Ø 69.8 mm

Height 22.1 mm

Fastening

ROHS compliant yes 10

MATERIAL SPECIFICATIONS:

Component Type Material Colour Finish

LEDil

Qty in box

MOQ

MPQ

MOLLY-W-B Single lens PMMA clear

ORDERING INFORMATION:

Component

C16265_MOLLY-W-B 180 36 18 » Box size: 480 x 280 x 300 mm

Last update: 03/12/2019 Subject to change without prior notice P

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


Published: 04/06/2018

1/6

Box weight (kg)

7.5



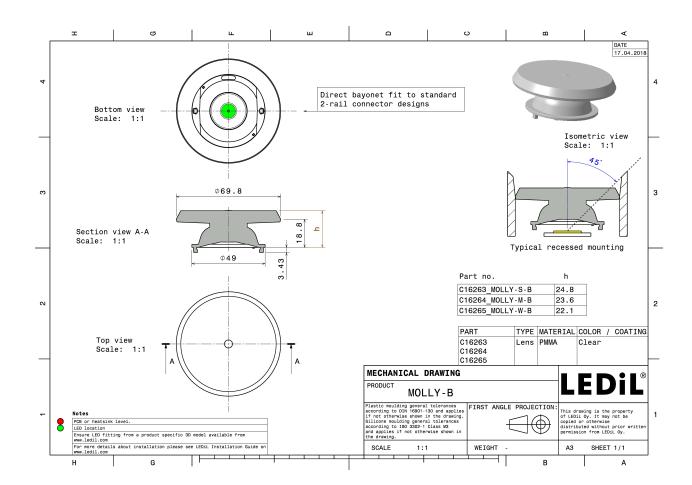





PHOTOMETRIC DATA (MEASURED):

CITIZEN

LED CLL03x/CLU03x

FWHM 62.0° Efficiency 90 % Peak intensity 0.9 cd/lm LEDs/each optic 1 Light colour White Required components: BJB: 47.319.2021






LUMILEDS

LED LUXEON CoB 1208

FWHM 62.0° 91 % Efficiency Peak intensity 0.8 cd/lm LEDs/each optic 1 White Light colour

Required components: BJB: 47.319.2011






TRIDONIC

LED SLE G7 LES15

FWHM 63.0° Efficiency 90 % Peak intensity 0.8 cd/lm LEDs/each optic 1 Light colour White

Required components: BJB: 47.319.2021






TRIDONIC

LED SLE G7 LES17 H

FWHM 57.0° Efficiency 89 % Peak intensity 0.9 cd/lm LEDs/each optic 1 White Light colour Required components:








PHOTOMETRIC DATA (MEASURED):

TRIDONIC LED SLE G7 LES21 H FWHM 58.0° Efficiency 88 % Peak intensity 0.9 cd/lm LEDs/each optic 1 Light colour White Required components:




XICATO

LED XOB 14.5 mm

FWHM 62.0° Efficiency 91 % Peak intensity 0.8 cd/lm

LEDs/each optic 1 Light colour White Required components: BJB: 47.319.2021







PHOTOMETRIC DATA (SIMULATED):

CITIZEN

LED CLL03x/CLU03x

FWHM 60.0° Efficiency 90 % Peak intensity 0.9 cd/lm

LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2021



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy

Last update: 03/12/2019 Subject to change without prior notice Published: 04/06/2018