


## SUMMARY

### # Wires

Coax	1
------	---



*Image is for illustrative purpose only*

Series	00
Termination type	Coupler/adaptor/bridge
IP rating	50
AWG wire size	0.00 - 0.00
Cable Ø	0.00 - 0.00 mm
Status	active

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FTA*: T-plug with two in line receptacles
Keying	Circular (can rotate)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Weight	7.20 g

### Performance

Configuration	00.250 : 1 Coax (50 Ohm)
Insulator	T: PTFE
Rated Current	4 Amps

### Specifications

Contact Type:	Coaxial 50 Ohm
Test voltage:	1.1 kV (rms)

### Others


Endurance (Shell):	5000 mating cycles
F ret (min):	100 N
Salt Spray Corrosion:	>1000 hr

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

---

# DRAWINGS

## Draws

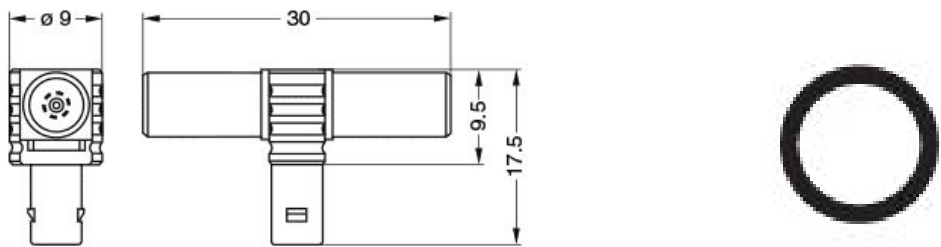

## Dimensions

	A	H	I	L
mm.	9	17.5	9.5	30
in.	0.35	0.69	0.37	1.18

---

# RECOMMENDED BY LEMO

## Tools

## Cables

*LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*