



**Mallory Sonalert Products, Inc.**

Part #:

**SCE016SD3DT8W**

# Sales Outline Drawing

Revision:

**A**


## Specifications:

|                       |  |
|-----------------------|--|
| Sound Level Category  | Soft   |
| Mode of Operation     | Dual Tone 3.1 - 3.0 kHz @ 1.5 WPS  |
| Voltage Rating        | 6 to 16 VDC  |
| Frequency             | 2900 ± 500 Hz  |
| Loudness @ 2 FT       | 65 to 75 dB(A) Typ.  |
| Current Draw          | 40mA MAX   |
| Housing Material      | 6/6 Nylon, Color: Black  |
| Storage Temperature   | -40° to +85° C   |
| Operating Temperature | -40° to +85° C   |
| Panel Mounting        | Recommended hole size is 1.25"(31.75mm). Thread front will fit standard 30mm(1.181") hole. |
| Knurled Nut           | Used to attach part to panel. The max recommended torque is 10 in-lbs.                     |
| Weight (Typical)      | 1.6 oz (45g)   |
| NEMA 3R,4X, & 12      | Approved with use of ACC03.  |
| cUL Recognition       | cUL Recognized   |
| Options               | Please contact factory.  |

## Dimensions: Inches (mm)

**cUL Recognized**

**ROHS Compliant**

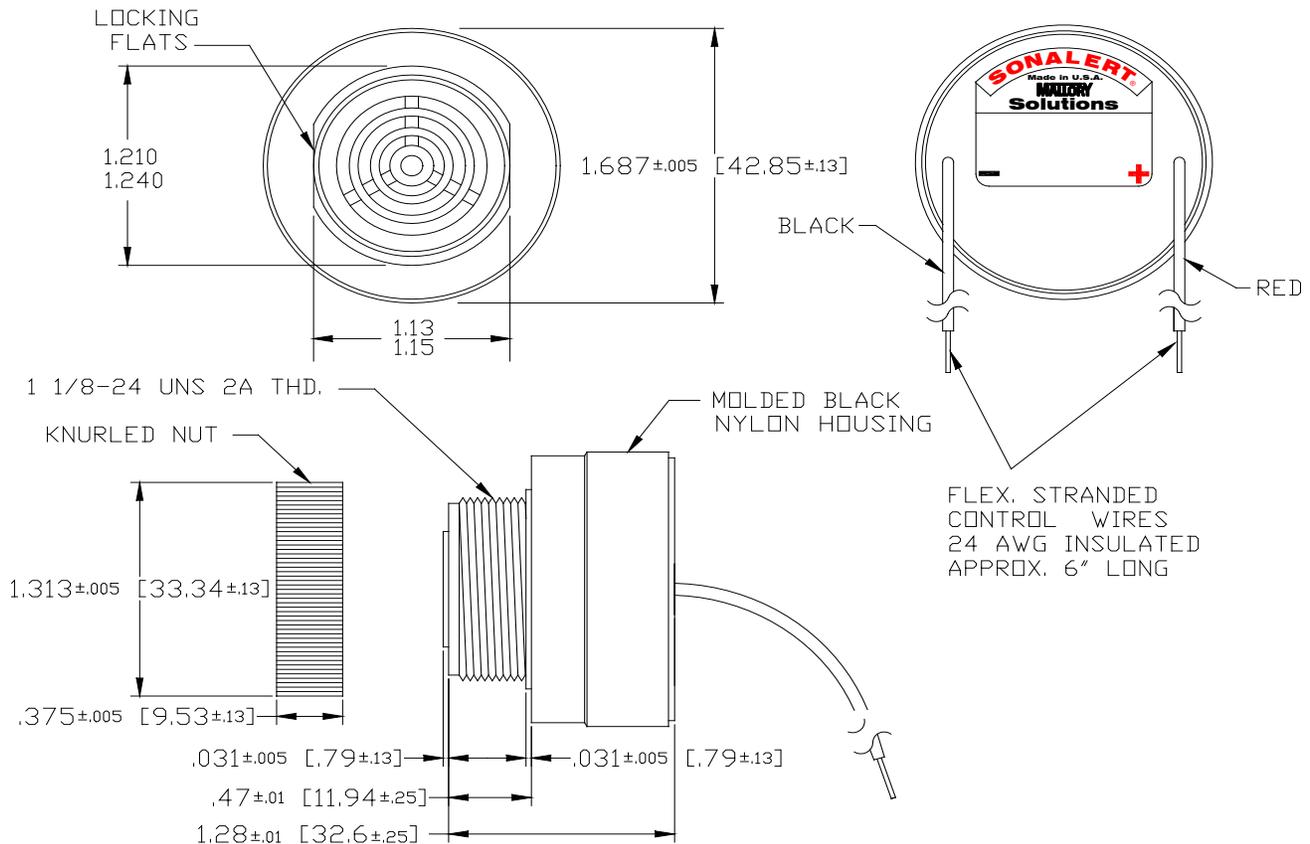

NOTE: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.