



Mallory Sonalert Products, Inc.

Part #:

SCE028LD3MG3S

Sales Outline Drawing

Revision:

A

Specifications:


| | | | | |
|------------------------|--|----------------------------|-----------------------------|----------------------------|
| Sound Level Category: | Loud | Loud | Loud | Medium |
| Mode of Operation: | Continuous | Double Pulse | Quick Pulse | Dual Tone |
| Loudness @ 2 FT: | 85 to 95 dB(A) Typ. | 85 to 95 dB(A) Typ. | 85 to 95 dB(A) Typ. | 75 to 85 dB(A) Typ. |
| Pulse Rate (PPS): | N/A | 2 | 60 | 7 |
| Frequency: | 2900 ± 500 Hz | 2900 ± 500 Hz | 2900 ± 500 Hz | 3.0 - 2.9 kHz |
| Connection: | T-BLOCK ONLY | T-BLOCK; BLACK WIRE TO (-) | T-BLOCK; YELLOW WIRE TO (-) | T-BLOCK; BOTH WIRES TO (-) |
| Voltage Rating: | 16 to 28 VDC | | | |
| Current Draw: | 40mA MAX | | | |
| Housing Material: | 6/6 Nylon, Color: Black | | | |
| Storage Temperature: | -40° to +85° C | | | |
| Operating Temperature: | -40° to +85° C | | | |
| Panel Mounting: | Recommended hole size is 1.25"(31.75mm). Thread front will fit standard 30mm(1.181") hole. | | | |
| Knurled Nut: | Used to attach part to panel. The max recommended torque is 10 in-lbs. | | | |
| Weight (Typical): | 1.6 oz (45g) | | | |
| NEMA 3R,4X, & 12: | Approved with use of ACC03. | | | |
| cUL Recognition: | cUL Recognized | | | |
| Options: | Please contact factory. | | | |

Dimensions:

Inches (mm)

cUL Recognized

ROHS Compliant

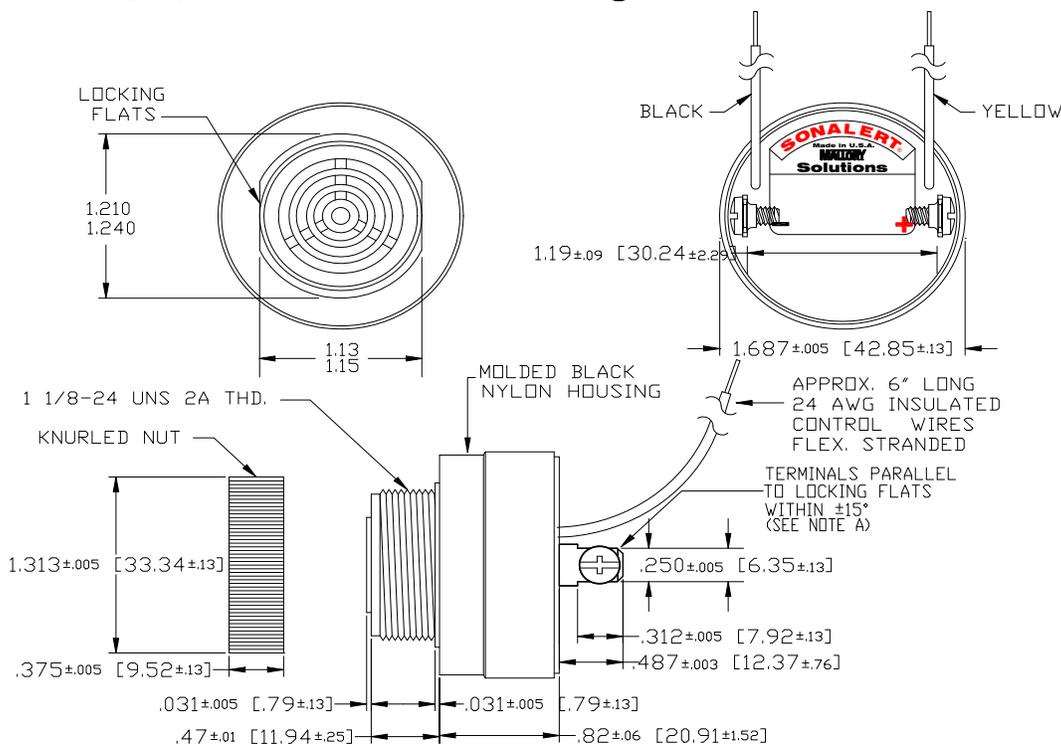

NOTE A: TERMINALS-.032 BRASS TIN PLATED, TAPPED FOR #6-32 SCREW. TWO #6-32 NICKEL PLATED BRASS SCREWS INCLUDED. WILL ACCEPT 1/4" QUICK CONNECT.

NOTE B: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.