



# 2 X 160A Schottky Barrier Rectifier

## SPB16035 — SPB16045

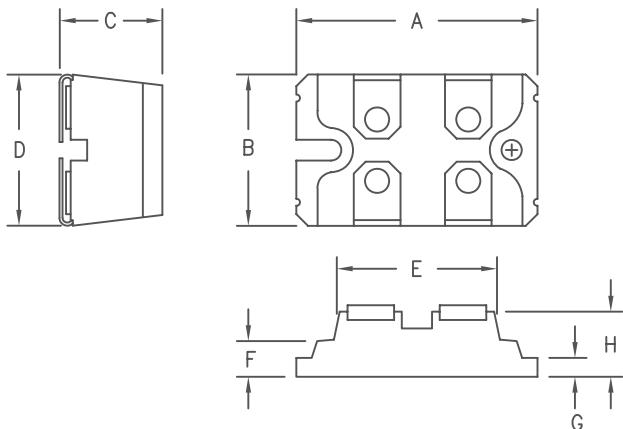

	Dim. Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	1.494	1.504	37.95	38.20	
B	0.976	0.986	24.79	25.04	
C	0.472	0.480	12.00	12.24	
D	0.990	1.000	25.15	25.40	
E	1.049	1.059	26.67	26.90	
F	0.164	0.174	4.16	4.42	
G	0.080	0.084	2.03	2.13	
H	0.372	0.378	9.45	9.60	

SOT-227



Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SPB16035		35V		35V
SPB16040		40V		40V
SPB16045	DSS2x121-0045B STPS24045TV	45V		45V

- 2500V isolation – Terminals to Base
- Low Forward Voltage Drop
- 2 Schottky Rectifiers in one pkg.
- 35–45V @ 160A/leg
- Low Switching losses

### Electrical Characteristics

Average forward current per leg	I <sub>F(AV)</sub> 160 Amps	T <sub>C</sub> = 76°C
Average forward current per package	I <sub>F(AV)</sub> 320 Amps	T <sub>C</sub> = 76°C
Maximum surge current per leg	I <sub>FSM</sub> 2500 Amps	8.3ms, half sine, T <sub>J</sub> = 175°C
Maximum repetitive reverse current per leg	I <sub>R(OV)</sub> 2 Amps	f = 1 KHz, 25°C, 1 $\mu$ sec square wave
Max peak forward voltage per leg	V <sub>FM</sub> 0.57 Volts	I <sub>FM</sub> = 160A: T <sub>J</sub> = 25°C*
Max peak reverse current per leg	I <sub>RM</sub> 8 mA	V <sub>RRM</sub> , T <sub>J</sub> = 25°C*
Max peak reverse current per leg	V <sub>ISOL</sub> 2500 VDC	any terminal to base
Typical junction capacitance per leg	C <sub>J</sub> 7000 pF	V <sub>R</sub> = 5.0V, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300  $\mu$ sec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-55°C to 175°C
Operating junction temp range	T <sub>J</sub>	-55°C to 150°C
Max thermal resistance per leg	R <sub>θJC</sub>	0.35°C/W
Max thermal resistance per pkg	R <sub>θJC</sub>	0.18°C/W
Mounting Torque		9–13 inch pounds
Weight		1.1 ounces (30 grams) typical



8700 East Thomas Road, P.O. Box 1390  
Scottsdale, AZ 85252  
PH: (480) 941-6300  
FAX: (480) 947-1503  
[www.microsemi.com](http://www.microsemi.com)

05-30-07 Rev. 2

# SPB16035 – SPB16045

Figure 1  
Typical Forward Characteristics – Per Leg

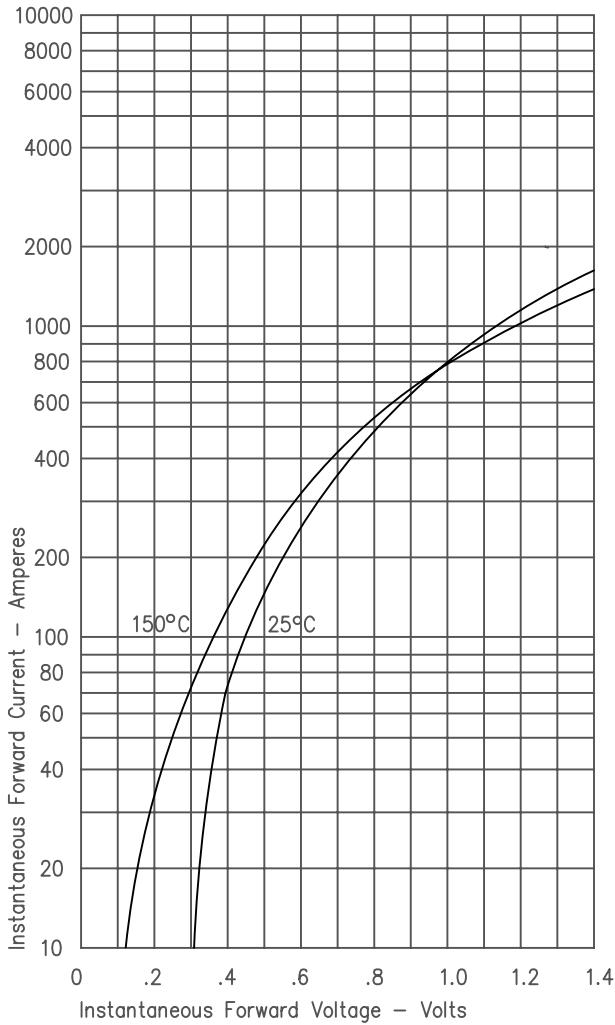


Figure 2  
Typical Reverse Characteristics – Per Leg

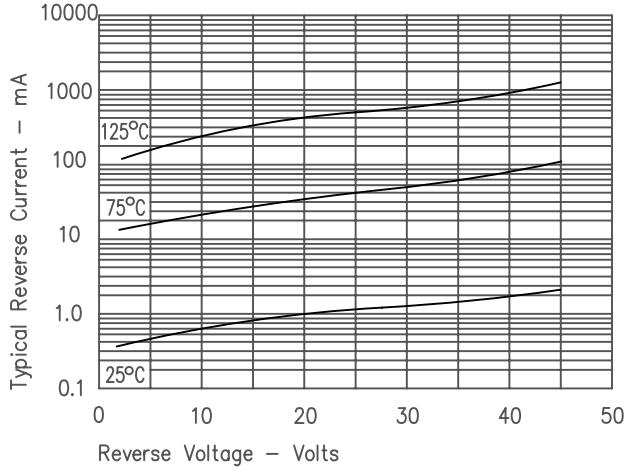


Figure 3  
Typical Junction Capacitance – Per Leg

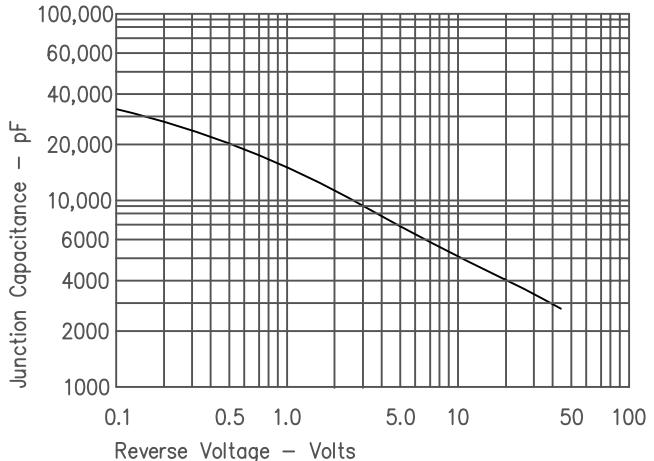


Figure 4  
Forward Current Derating – Per Leg

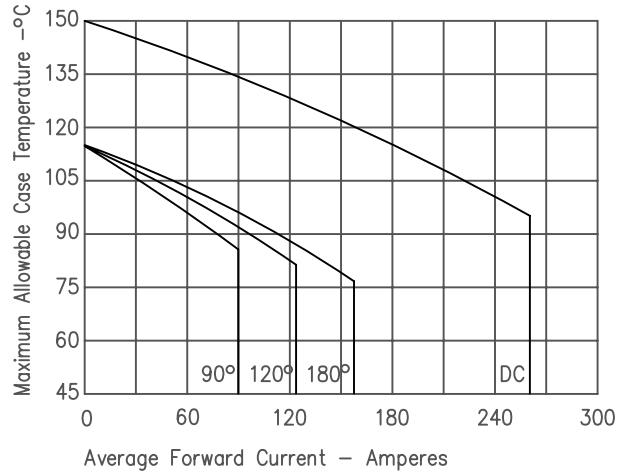


Figure 5  
Maximum Forward Power Dissipation – Per Leg

