



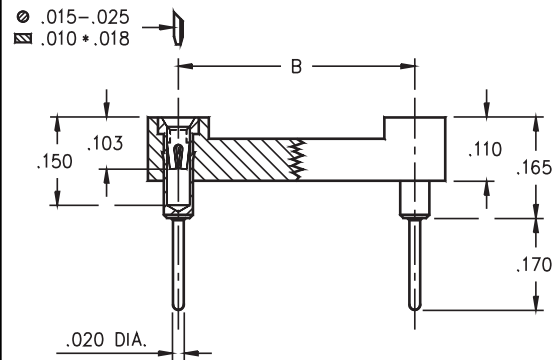

- DIP sockets with increased solder tail length of .170", allowing application on multilayer PCBs up to .139" thickness. Other lengths available upon request.
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses Mill-Max #0134 pin. See page 134 for details.

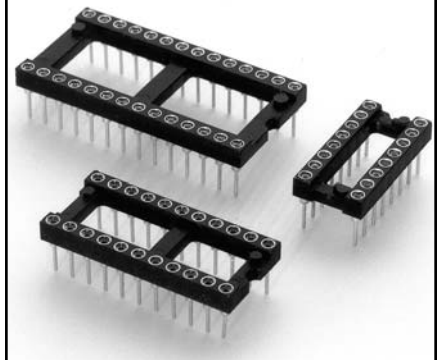

Total number of pins				Quantity per tube	Ordering Information							
	A	B	C									
10	0.5	0.2	0.3	40	XX= Plating Code See Below							
4	0.2	0.3	0.4	102								
6	0.3	0.3	0.4	67								
8	0.4	0.3	0.4	50								
10	0.5	0.3	0.4	40								
14	0.7	0.3	0.4	28								
16	0.8	0.3	0.4	25								
18	0.9	0.3	0.4	22								
20	1.0	0.3	0.4	20								
22	1.1	0.3	0.4	18								
24	1.2	0.3	0.4	16								
28	1.4	0.3	0.4	14								
20	1.0	0.4	0.5	20	For RoHS compliance, select plating code. For the all gold option (XX=13) also change part number from 111-XX-XXX-41-001000 to 111-13-XXX-41-001100							
22	1.1	0.4	0.5	18								
24	1.2	0.4	0.5	16								
28	1.4	0.4	0.5	14								
32	1.6	0.4	0.5	12								
24	1.2	0.6	0.7	16								
28	1.4	0.6	0.7	14								
32	1.6	0.6	0.7	12								
36	1.8	0.6	0.7	11								
40	2.0	0.6	0.7	10								
42	2.1	0.6	0.7	9								
48	2.4	0.6	0.7	8								
50	2.5	0.6	0.7	8								
52	2.6	0.6	0.7	7								
50	2.5	0.9	1.0	8	RoHS 2002/95/EC							
52	2.6	0.9	1.0	7								
64	3.2	0.9	1.0	6								
SPECIFY PLATING CODE XX=					13		93	99		43	44	
Sleeve (Pin)					10μ" Au		200μ" Sn/Pb	200μ" Sn/Pb		200μ" Sn	200μ" Sn	
Contact (Clip)					30μ" Au		30μ" Au	200μ" Sn/Pb		30μ" Au	200μ" Sn	