




- Modular contacts for use on .100" grid, available in eight heights from .137" to .295", supplied in single and double row contact strips.
- Precision machined piston / base and gold plated components assure a 100,000 min. cycle life.
- Pistons have a long stroke relative to the low profile of the assembly.
- Low resistance, high current contacts are rated at 2 amps continuous, 3 amps peak.
- High temperature thermoplastic insulators are suitable for surface mount processes.
- A typical application would be as the base unit (battery/charger) interface for portable equipment such as mobile phones/radios, bar code readers, medical and test instruments.

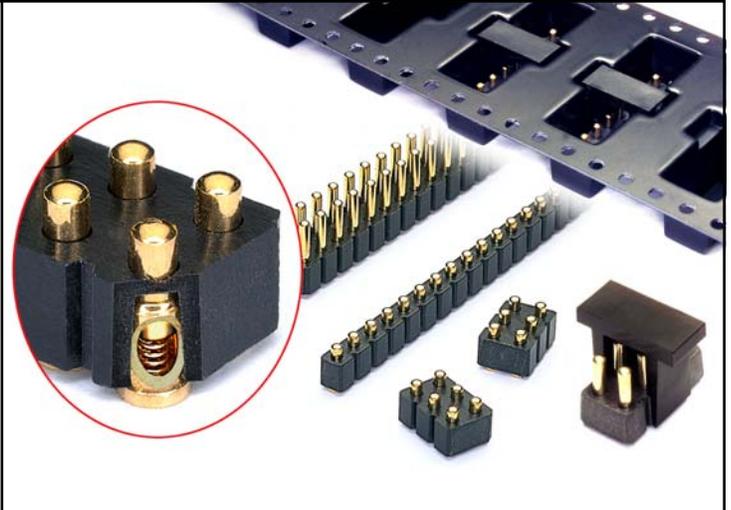

SINGLE ROW Series 811

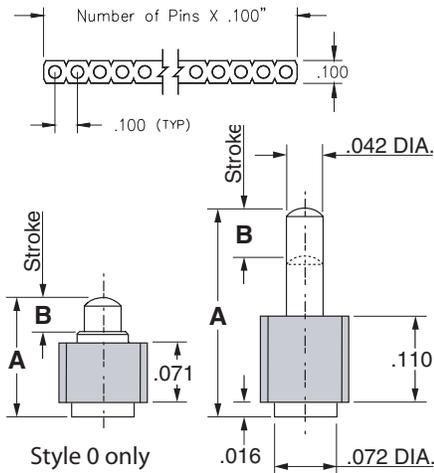

DOUBLE ROW Series 813

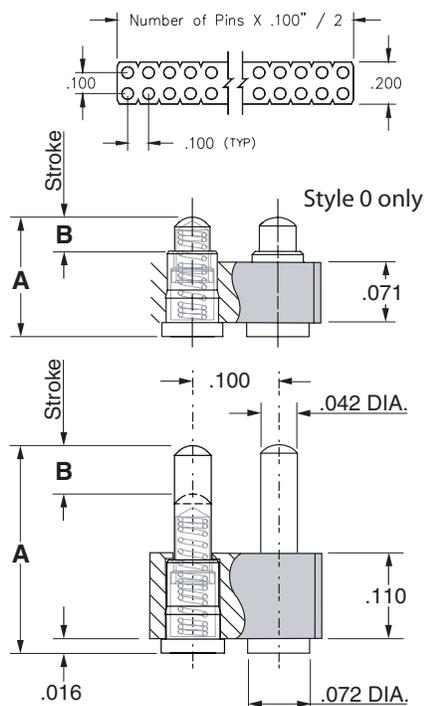

Ordering Information

Single Row Series 811

811-22-0XX-30-00X-101

Specify # of contacts → 01-64
Specify contact style 0-7

Double Row Series 813

813-22-0XX-30-00X-101

Specify # of contacts → 04-72
Specify contact style 0-7

CONTACT STYLE	INITIAL HEIGHT A	STROKE B
0	.137	.039
1	.177	.055
2	.197	.055
3	.217	.055
4	.236	.055
5	.256	.055
6	.276	.055
7	.295	.055

Technical Specifications

Materials:

Contact piston & Base: Machined copper alloy plated 20μ" gold over 100μ" nickel
Spring: Beryllium copper plated 10μ" gold
Insulator: High temp. thermoplastic rated UL94 V-0

Mechanical:

Spring force @ initial height (A): 25 grams
Spring force @ mid stroke (B/2): 60 grams
Spring force @ full stroke (B): 95 grams
Durability: 100,000 cycles min.


Electrical:

Voltage rating: 100Vrms/150Vdc
Current rating: 2A (continuous), 3A (peak) per contact
Contact resistance: 20mΩ max.
Insulation resistance: 10,000MΩ min.
Dielectric strength: 700Vrms min.
Capacitance: 1pF max.

Ordering Information for Series 811/813 in Carrier Tape

Single Row Series 811	Double Row Series 813
811-22-00X-30-00X-191	813-22-0XX-30-00X-191
Specify # of contacts → 2-8	Specify contact style 1-7
Specify # of contacts → 2-8	Specify # of contacts → 04-16
<p>400 parts per 13" reel</p> <p>VACUUM PICK-UP CLIP REMOVED AFTER SOLDERING</p>	<p>400 parts per 13" reel</p> <p>VACUUM PICK-UP CLIP REMOVED AFTER SOLDERING</p>

The versatility of spring loaded contacts

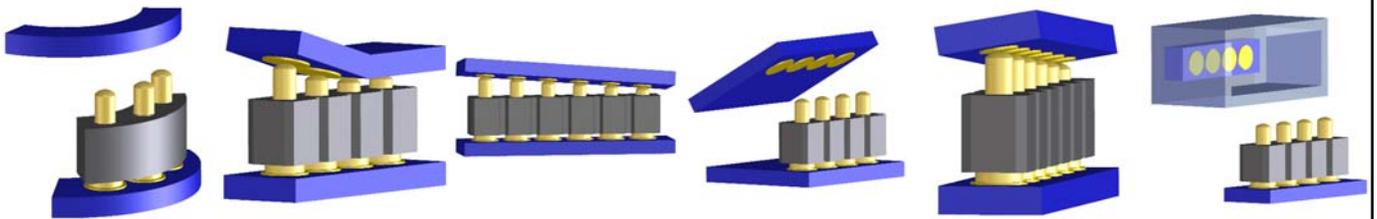

Some Typical Applications

<p>Cable Termination</p>	<p>Internal Battery Connection</p>
<p>Charging Base for Portable Instruments</p>	<p>PCB Connection</p>