

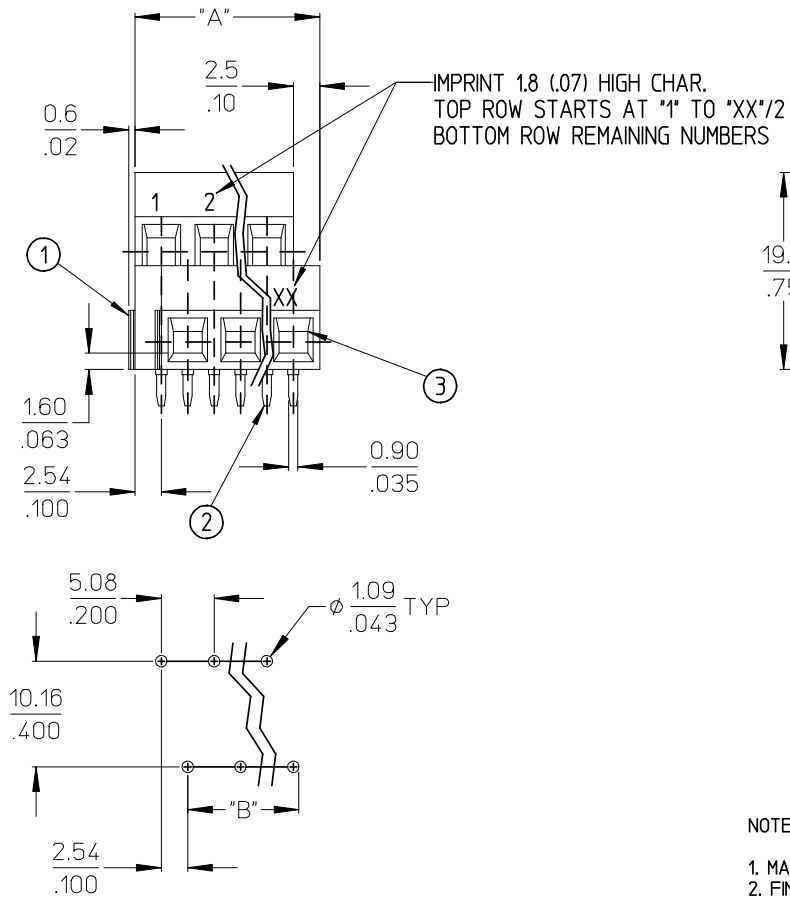




RECOMMENDED PTH PATTERN

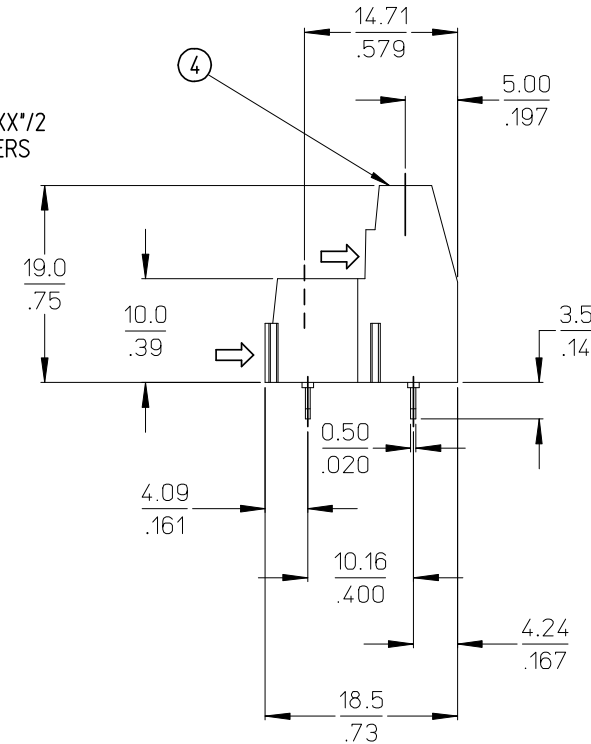

06 CIRCUIT SHOWN

(C)

NO. OF CIRC. "XX"	DIM. "A"		DIM. "B"		MATERIAL NO. (BLACK)	MATERIAL NO. (GREEN)	MATERIAL NO. 10A, BLACK
04	12.7	[.50]	5.08	[.200]	398800504	398804504	
06	17.8	[.70]	10.16	[.400]	398800506	398804506	
08	22.9	[.90]	15.24	[.600]	398800508	398804508	
10	27.9	[1.10]	20.32	[.800]	398800510	398804510	398820510
12	33.0	[1.30]	25.40	[1.000]	398800512	398804512	
14	38.1	[1.50]	30.48	[1.200]	398800514	398804514	
16	43.2	[1.70]	35.56	[1.400]	398800516	398804516	
18	48.3	[1.90]	40.64	[1.600]	398800518	398804518	
20	53.3	[2.10]	45.72	[1.800]	398800520	398804520	
22	58.4	[2.30]	50.80	[2.000]	398800522	398804522	
24	63.5	[2.50]	55.88	[2.200]	398800524	398804524	398820524
26	68.6	[2.70]	60.96	[2.400]	398800526	398804526	
28	73.7	[2.90]	66.04	[2.600]	398800528	398804528	
30	78.7	[3.10]	71.12	[2.800]	398800530	398804530	
32	83.8	[3.30]	76.20	[3.000]	398800532	398804532	
34	88.9	[3.50]	81.28	[3.200]	398800534	398804534	
36	94.0	[3.70]	86.36	[3.400]	398800536	398804536	
38	99.1	[3.90]	91.44	[3.600]	398800538	398804538	
40	104.1	[4.10]	96.52	[3.800]	398800540	398804540	
42	109.2	[4.30]	101.6	[4.000]	398800542	398804542	
44	114.3	[4.50]	106.7	[4.200]	398800544	398804544	
46	119.4	[4.70]	111.76	[4.400]	398800546	398804546	
48	124.5	[4.90]	116.84	[4.600]	398800548	398804548	

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. PRODUCT SPECIFICATION: NOT REQUIRED
4. PACKAGING: NOT REQUIRED
5. MATES WITH: NONE
6. "XX" REFERS TO THE QUANTITY OF CIRCUITS.
7. ROHS COMPLIANT (C)

4	XX	SCREW, M3, SLOTTED	BRONZE	NICKEL PLATE
3	XX	CAGE CLAMP	BRASS	NICKEL PLATE
2	XX	TERMINAL, PC	COPPER	TIN PLATE
1	1	INSULATOR	POLYAMIDE	SEE CHART
ITEM	QTY.	DESCRIPTION	MATERIAL	ENGINEERING NUMBER




ADD GREEN OPTION EC NO: WNA2008-0180 DRWN: JENC INAS CHKD: CYORK APPR: JMACNEIL	DESCRIPTION REV
---	--------------------

QUALITY SYMBOLS ▽=0 ▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± .---	± .---
3 PLACES	± .---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.3	± .---
ANGULAR ± 2 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM/IN	
DRAWN BY C. YORK	DATE 2004/11/22
CHECKED BY R. STONE	DATE 2004/11/22
APPROVED BY GHR	DATE 2004/11/22
MATERIAL NO. SEE CHART	
SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
TITLE 5.08MM (.200") LOW PROF. TWO LEVEL TERM. BLOCK		
MOLEX INCORPORATED		
DOCUMENT NO. SD-39880-005		SHEET NO. 1 OF 1

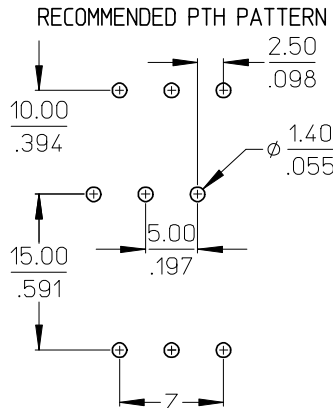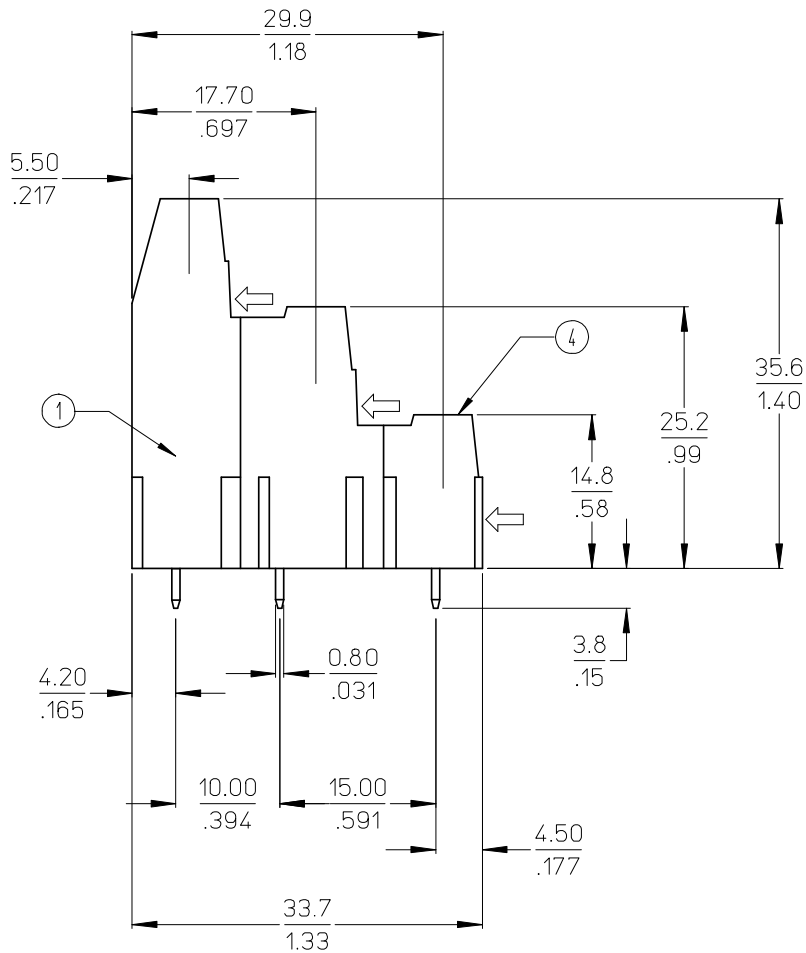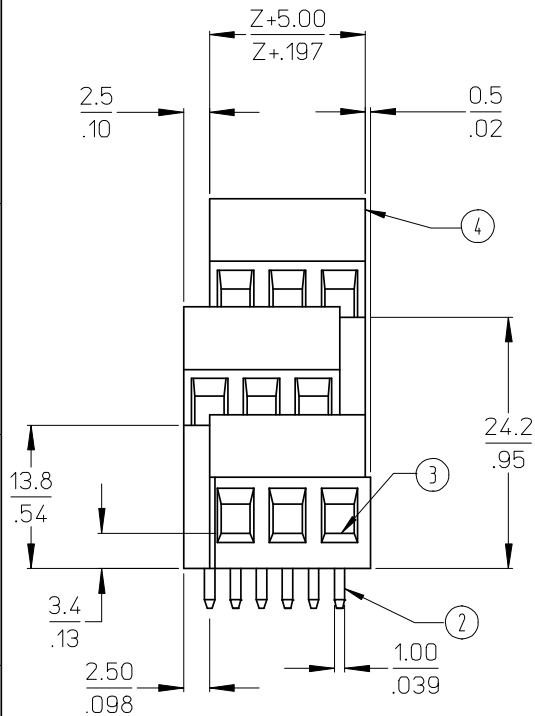

- NOTES: (B)
- 1. MATERIAL: SEE TABLE
 - 2. FINISHES: SEE TABLE
 - 3. PRODUCT SPECIFICATION: NOT REQUIRED
 - 4. PACKAGING: NOT REQUIRED
 - 5. MATES WITH: NONE
 - 6. "XX" REFERS TO THE QUANTITY OF CIRCUITS.
 - 7. ROHS COMPLIANT

NO. OF CIRC. "XX"	MATERIAL NO. (GREEN)	MATERIAL NO. (BLACK)	DIM. "Z"	
			IN.	MM
06	398904906	398900906	.20	5.0
09	398904909	398900909	.39	10.0
12	398904912	398900912	.59	15.0
15	398904915	398900915	.79	20.0
18	398904918	398900918	.98	25.0
21	398904921	398900921	1.18	30.0
24	398904924	398900924	1.38	35.0
27	398904927	398900927	1.57	40.0
30	398904930	398900930	1.77	45.0
33	398904933	398900933	1.97	50.0
36	398904936	398900936	2.16	55.0
39	398904939	398900939	2.36	60.0
42	398904942	398900942	2.56	65.0
45	398904945	398900945	2.76	70.0
48	398904948	398900948	2.95	75.0
51	398904951	398900951	3.15	80.0
54	398904954	398900954	3.35	85.0
57	398904957	398900957	3.54	90.0
60	398904960	398900960	3.74	95.0
63	398904963	398900963	3.94	100.0
66	398904966	398900966	4.13	105.0
69	398904969	398900969	4.33	110.0
72	398904972	398900972	4.53	115.0

4	XX	SCREW	BRONZE	NICKEL
3	XX	CAGE CLAMP	BRASS	NICKEL
2	XX	TERMINAL	PHOSPHOR BRONZE	HOT TIN DIP
1	1	INSULATOR	POLYAMIDE	SEE CHART
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

ADD GREEN OPTION
EC NO: WNA2008-0180
DRWN: JENC INAS
CHKD: CYORK
APPR: JMACNEIL
REV B

DESCRIPTION
2008/05/16
2008/05/21
2008/05/22

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± --- ± ---
3 PLACES ± --- ± .005
2 PLACES ± 0.13 ± .01
1 PLACE ± 0.3 ± ---
ANGULAR ± 2 °
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY
R. KEMP
DATE
2001/12/04

CHECKED BY
GHR
DATE
2001/12/04

APPROVED BY
GHR
DATE
2001/12/04

MATERIAL NO.
SEE CHART

SIZE
B

SCALE
2:1

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION

TITLE
5.08MM (.200") MID
THREE LEVEL TERM. BLOCK

MOLEX INCORPORATED

DOCUMENT NO.
SD-39890-0906

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION