



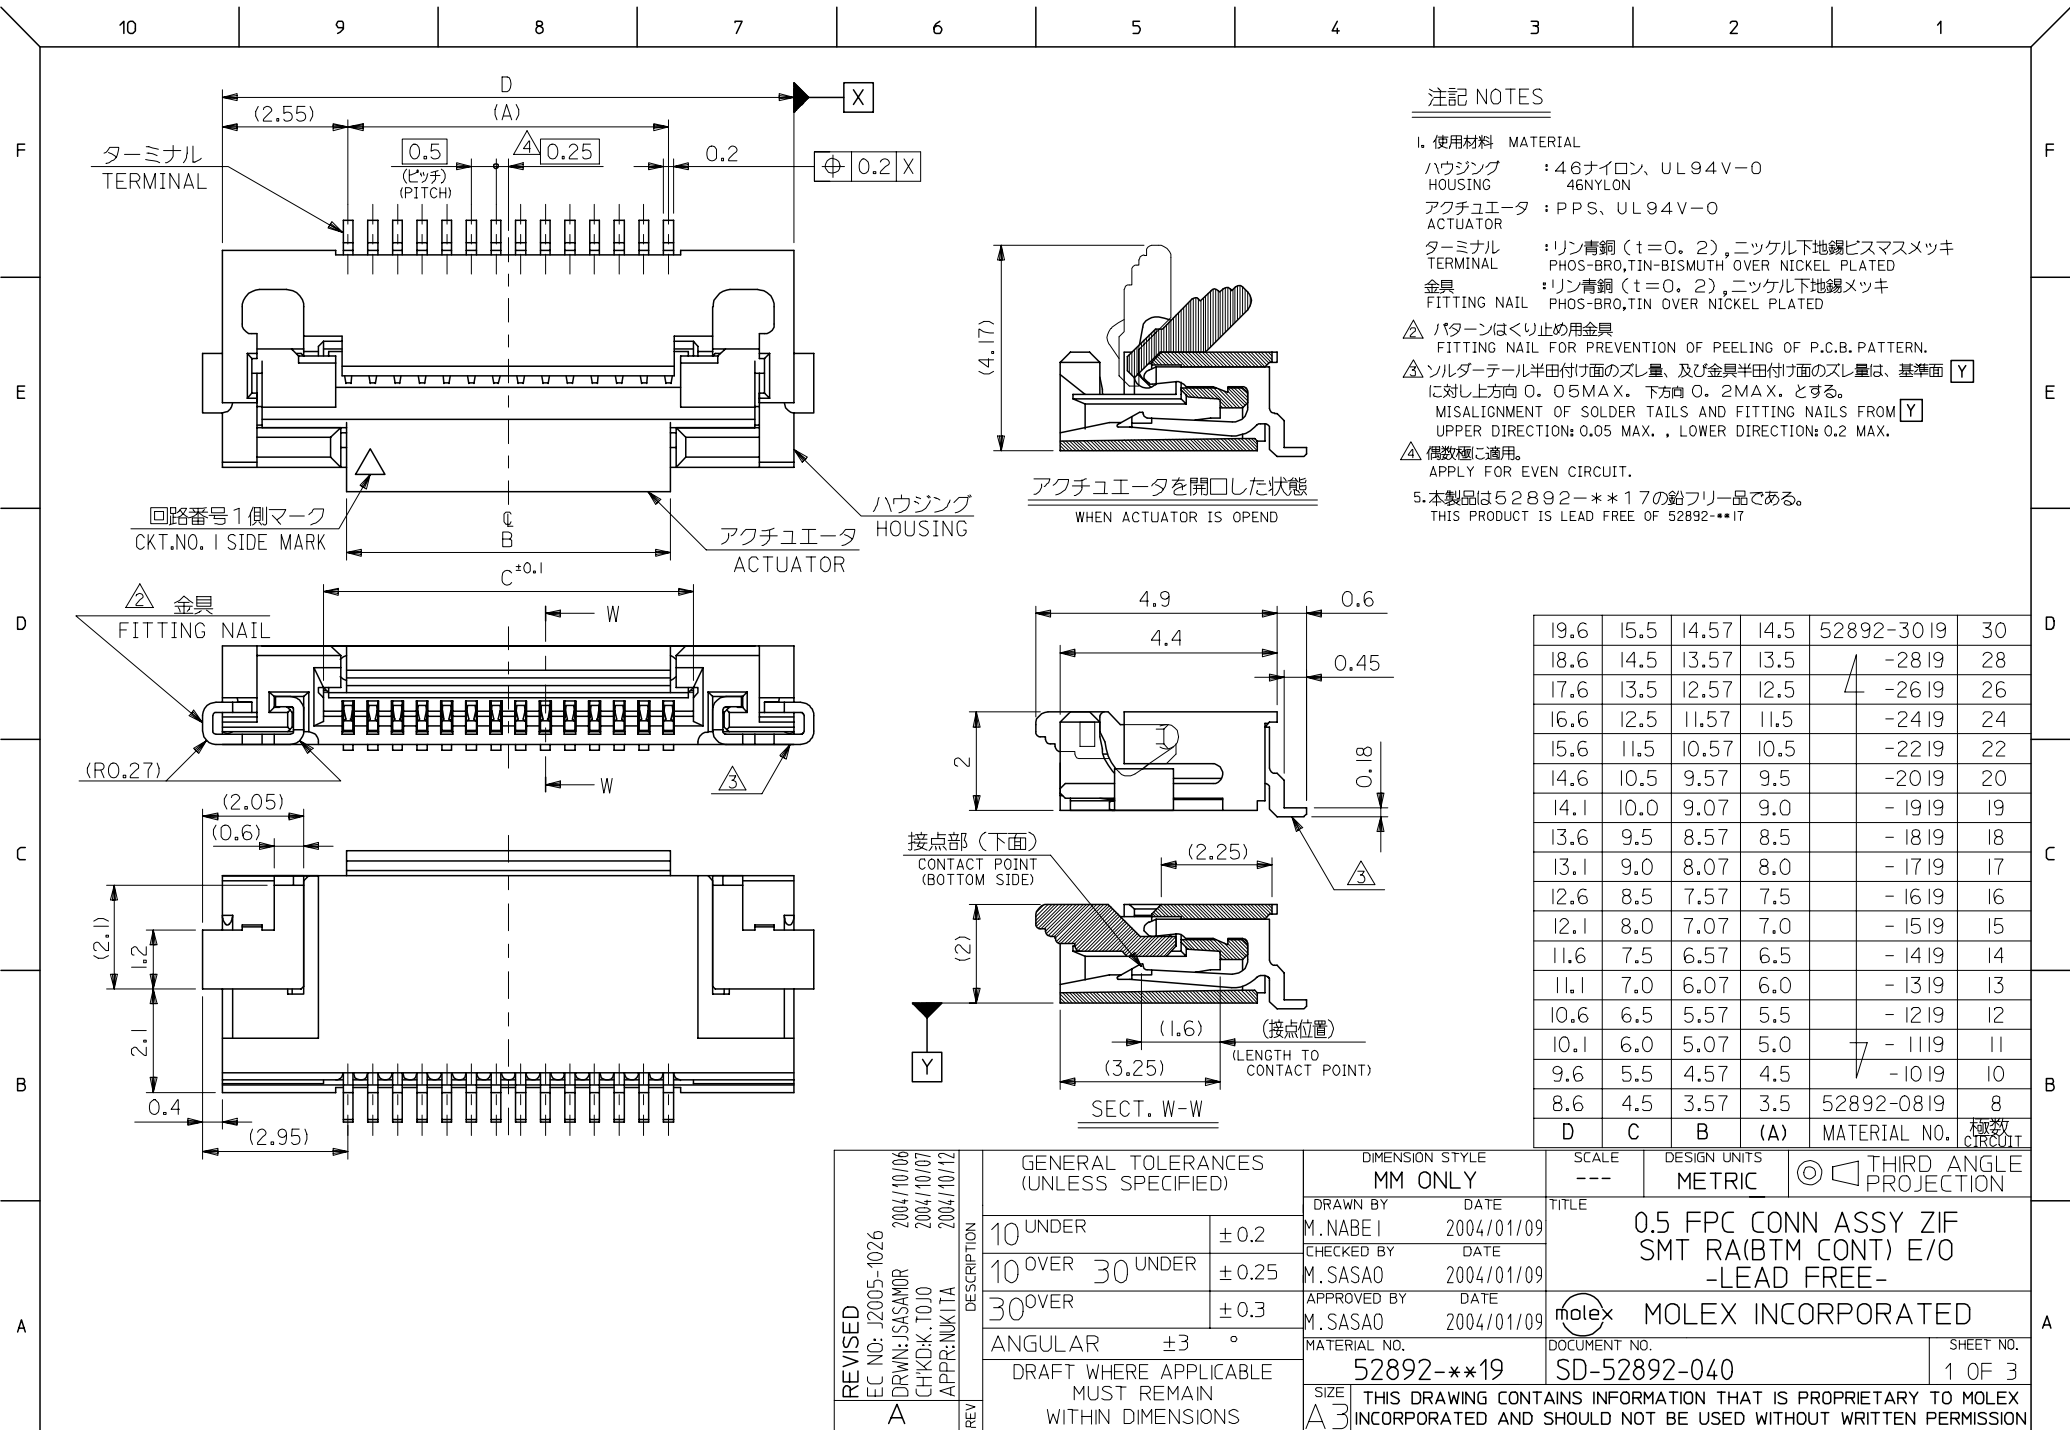

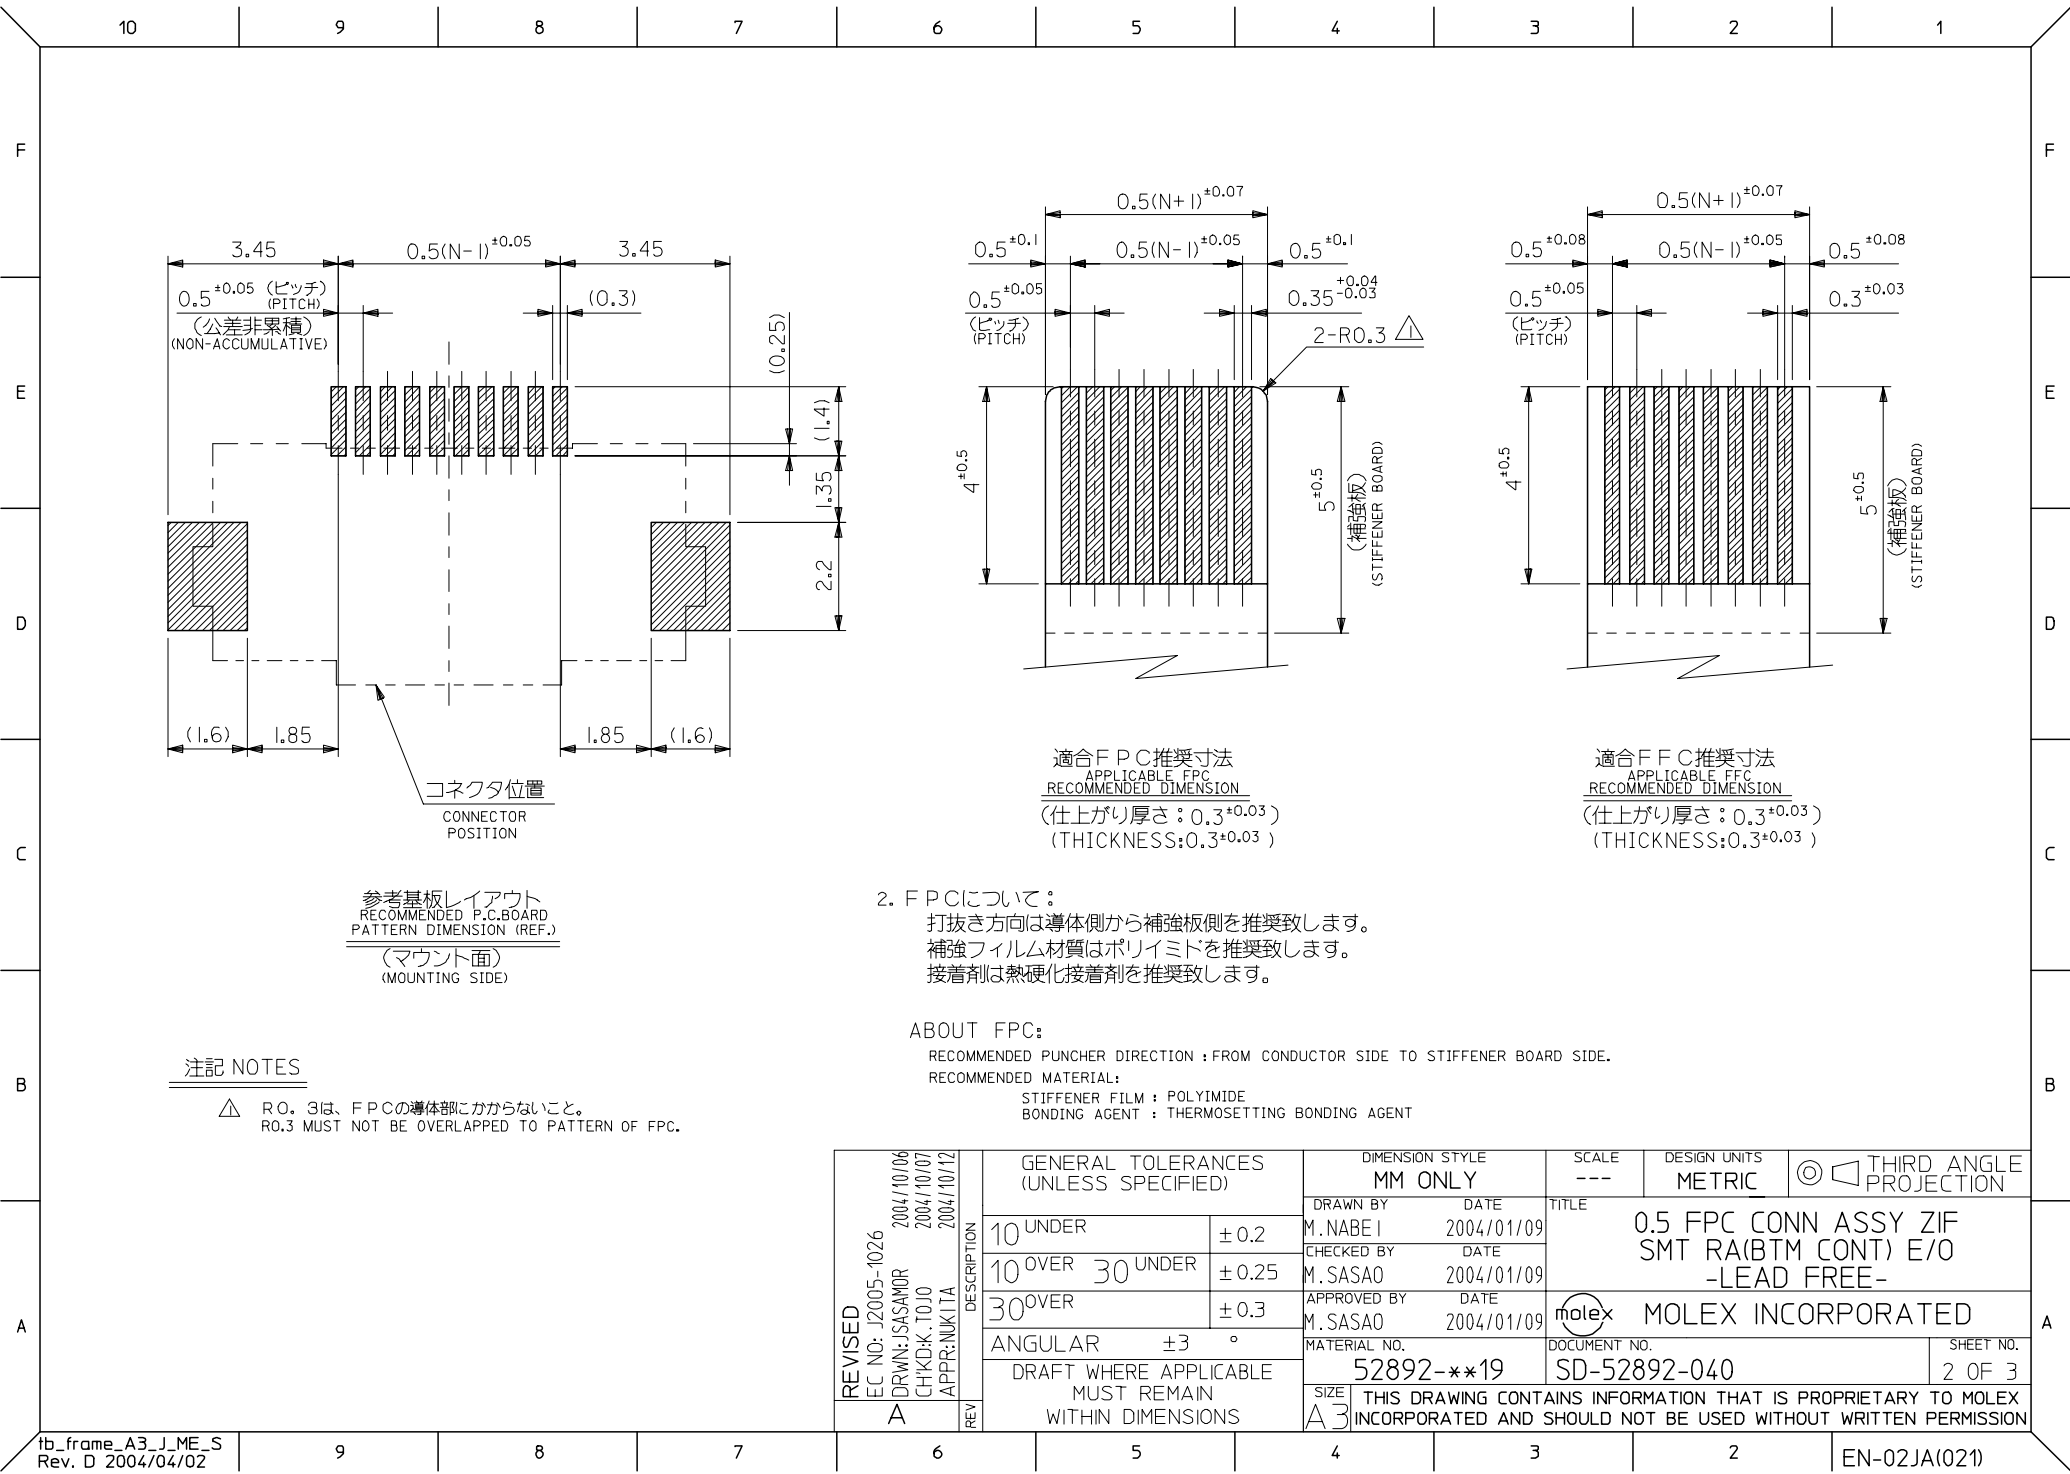

10 9 8 7 6 5 4 3 2 1

ターミナル
TERMINAL

回路番号1側マーク
CKT.NO.1 SIDE MARK

金具
FITTING NAIL

アクチュエータ
ACTUATOR


ハウジング
HOUSING

金型変更に伴う形状変更品形状図

APPLY CHANGED FORM AT CHANGED DIE


注記 NOTES

△ 18極以上は2ヶ所、10～16極はハウジングセンター上に1ヶ所とする。
18 CKTS & MORE THAN 18 CKTS PLACED 2 POINT.
10 ~ 16 CKTS PLACED 1 POINT ON HOUSING CENTER.




△3.5
TYP.(2)

REVISED EC NO: J2005-1026 DRWN: SASAMOR CHKD: TOJO APPR: NUKITA A	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	±0.2	DRAWN BY M. NABEI	DATE 2004/01/09	TITLE 0.5 FPC CONN ASSY ZIF SMT RA(BTM CONT) E/O -LEAD FREE-			
		10 OVER 30 UNDER	±0.25	CHECKED BY M. SASAO	DATE 2004/01/09				
		30 OVER	±0.3	APPROVED BY M. SASAO	DATE 2004/01/09	MOLEX INCORPORATED			
		ANGULAR ±3 °		MATERIAL NO. 52892-**-19		DOCUMENT NO. SD-52892-040		SHEET NO. 3 OF 3	
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

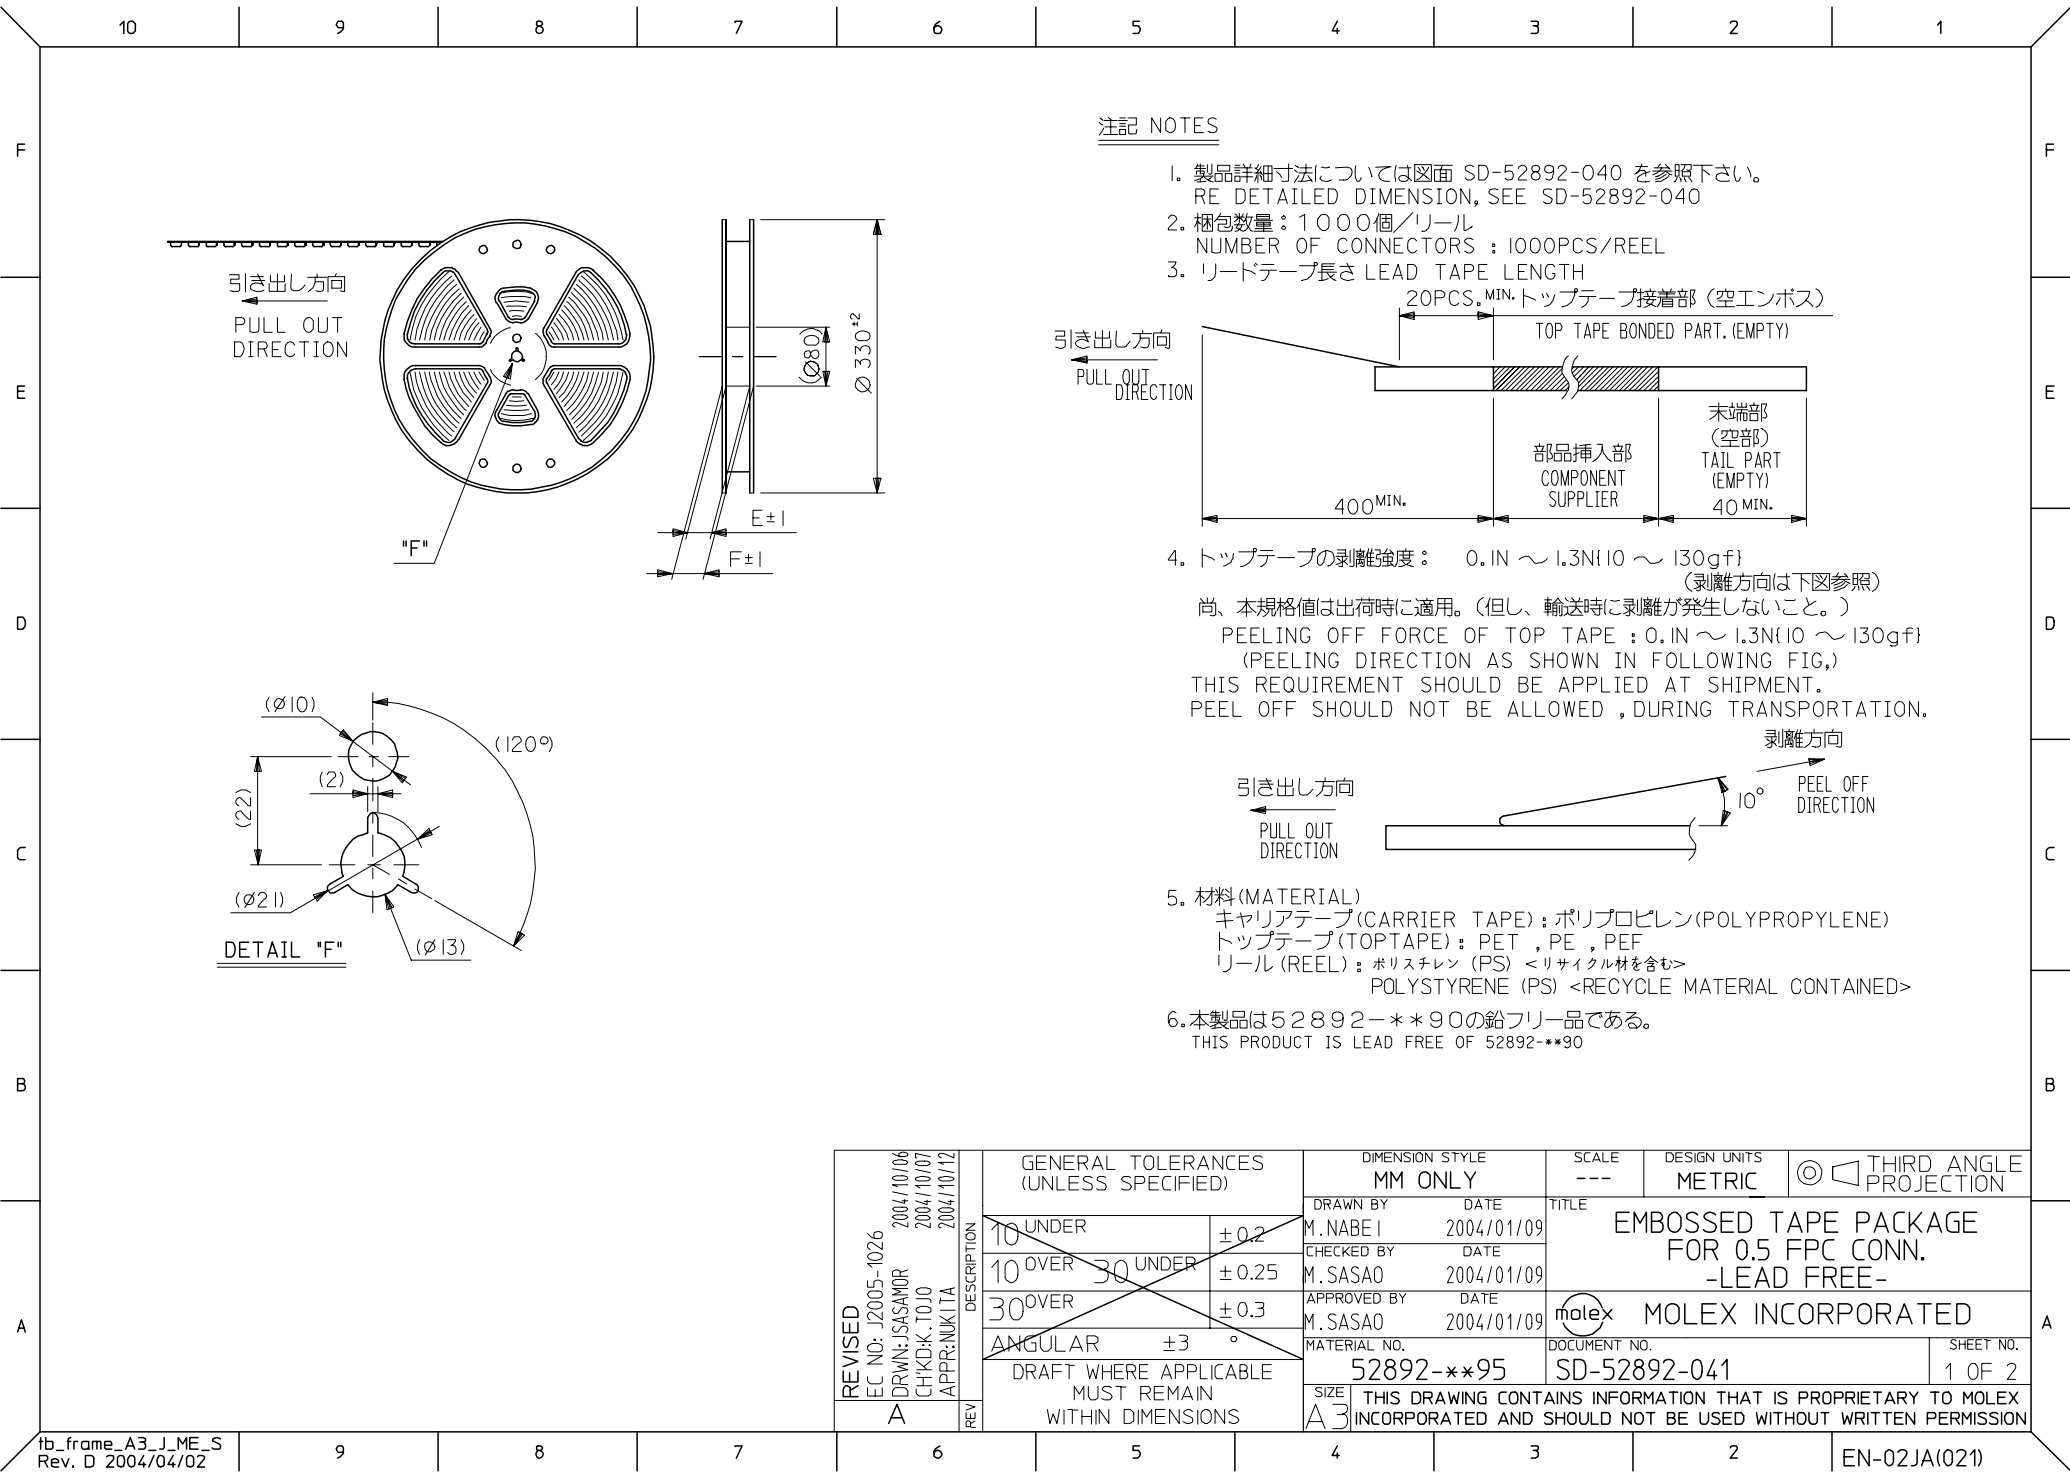


注記 NOTES

1. 製品詳細寸法については図面 SD-52892-040 を参照下さい。
RE DETAILED DIMENSION, SEE SD-52892-040
2. 梱包数量：1000個/リール
NUMBER OF CONNECTORS：1000PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

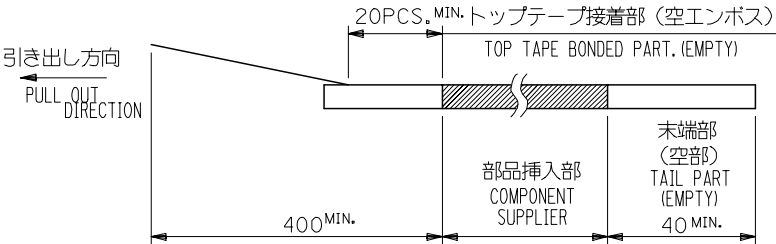

4. トップテープの剥離強度： 0.1N ～ 1.3N(10 ～ 130gf)
(剥離方向は下図参照)
尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
PEELING OFF FORCE OF TOP TAPE：0.1N ～ 1.3N(10 ～ 130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.



5. 材料(MATERIAL)
キャリアテープ(CARRIER TAPE)：ポリプロピレン(POLYPROPYLENE)
トップテープ(TOPTAPE)：PET, PE, PEF
リール(REEL)：ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>

6. 本製品は52892-**-90の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52892-**-90

REVISED		EC NO: J2005-1026		2004/10/06		2004/10/07		2004/10/12		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		DESIGN UNITS METRIC		 THIRD ANGLE PROJECTION			
A		DRWN:JSANOR CHK:K.TOJO APPR:NUKITA		DESCRIPTION		10 UNDER		±0.2		M.NABEI		2004/01/09		TITLE EMBOSSD TAPE PACKAGE FOR 0.5 FPC CONN. -LEAD FREE-							
						10 OVER 30 UNDER		±0.25		CHECKED BY		DATE									
						30 OVER		±0.3		APPROVED BY		DATE									
						ANGULAR ±3°		M.SASAO		2004/01/09		MOLEX MOLEX INCORPORATED									
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		52892-**95								DOCUMENT NO.		SD-52892-041	
						SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													



キャリアテープ幅 CARRIER TAPE WIDTH	F	E	(D)	(C)	(B)	(A)	MATERIAL NO.	極数 CIRCUIT
--------------------------------	---	---	-----	-----	-----	-----	--------------	---------------

DATE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
MM ONLY	---	METRIC	