


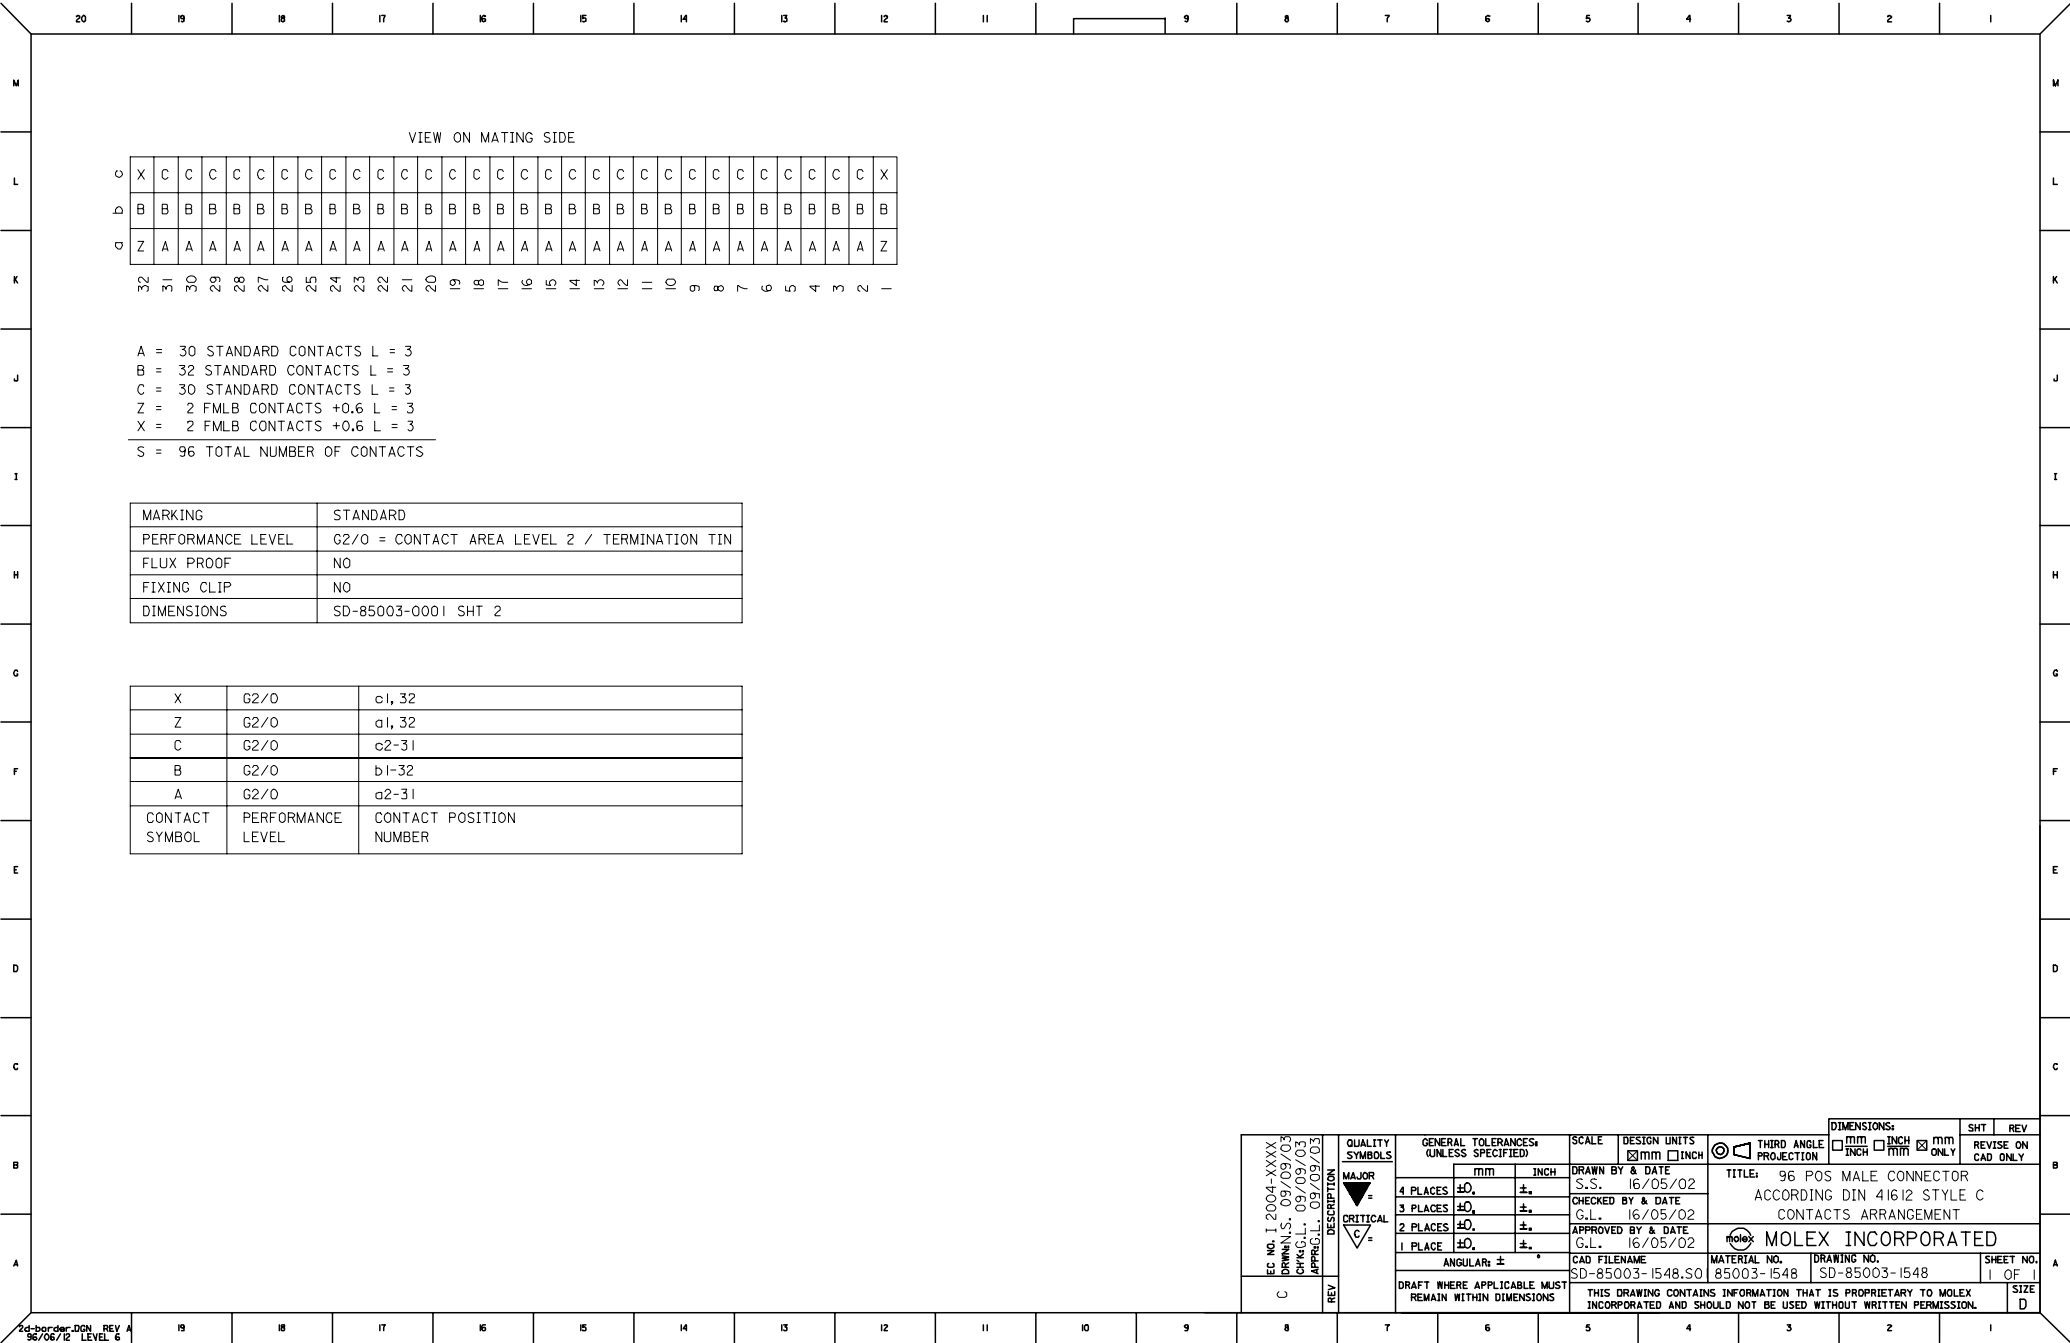

24-border-DGN_REV A
96/06/12 LEVEL 6

VIEW ON MATING SIDE															
X	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
Z	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17

A = 30 STANDARD CONTACTS L = 3
B = 32 STANDARD CONTACTS L = 3
C = 30 STANDARD CONTACTS L = 3
Z = 2 FMLB CONTACTS +0.6 L = 3
X = 2 FMLB CONTACTS +0.6 L = 3
S = 96 TOTAL NUMBER OF CONTACTS

MARKING	STANDARD
PERFORMANCE LEVEL	G2/O = CONTACT AREA LEVEL 2 / TERMINATION TIN
FLUX PROOF	NO
FIXING CLIP	NO
DIMENSIONS	SD-85003-0001 SHT 2

X	G2/O	a1, 32
Z	G2/O	a1, 32
C	G2/O	a2-31
B	G2/O	b1-32
A	G2/O	a2-31
CONTACT SYMBOL	PERFORMANCE LEVEL	CONTACT POSITION NUMBER

EC NO. I 2004-XXXX DRAWN: S. 09/09/03 CHK: G.L. 09/09/03 APPR: G.L. 09/09/03		QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION ☐ mm ☒ INCH	DIMENSIONS: ☐ mm ☒ INCH		SHT	REV		
C			4 PLACES ± 0.1	± 0.1	DRAWN BY & DATE S.S. 16/05/02	TITLE: 96 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE C CONTACTS ARRANGEMENT		MATERIAL NO. 85003-1548		DRAWING NO. SD-85003-1548			
REV			3 PLACES ± 0.1	± 0.1	CHECKED BY & DATE G.L. 16/05/02	APPROVED BY & DATE G.L. 16/05/02		CAD FILENAME SD-85003-1548.S0		SHEET NO. 1 OF 1			
			2 PLACES ± 0.1	± 0.1	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		SIZE D				