


TITLE	PART No.	REV	PAGE
Cable 34 Coax, 38 AWG, 50 Ohm	100062-0582	A	1 of 1

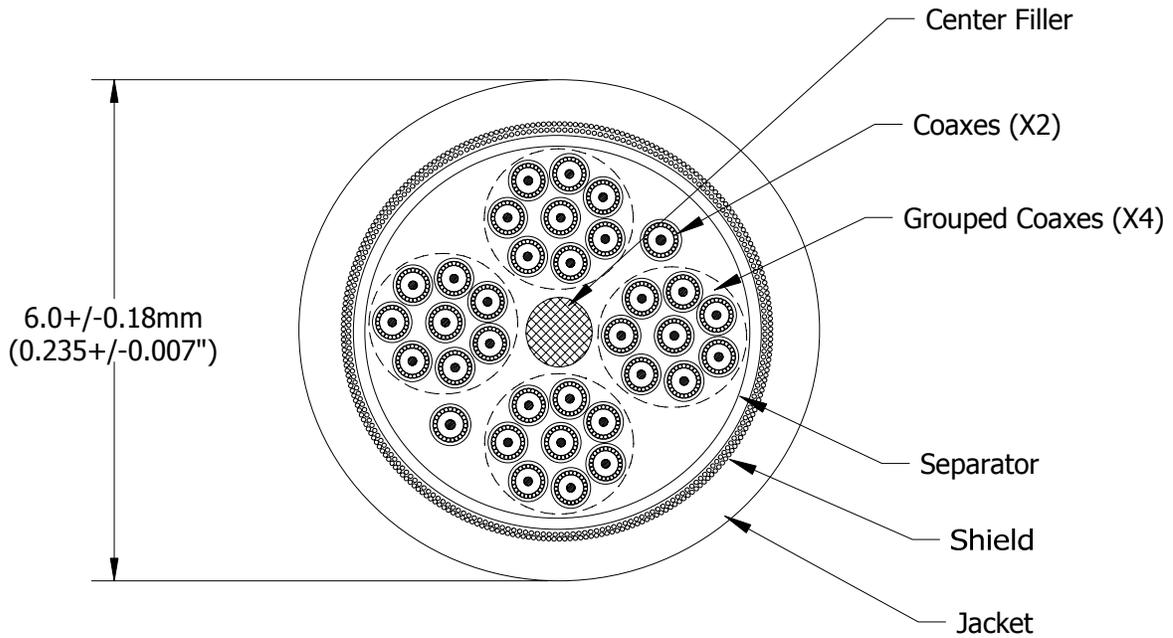

NOTES

Filler: Aramid Fiber, >60 lbs. Pull Force

COAX: (X4) Groups of 8 , (X2) individual.

Conductor: 38 AWG, Solid, SPC

Insulation: PFA, Green

Served Shield: 44 AWG TPC

Jacket: PFA, 0.5mm (0.020") OD.

Color: (X4) Groups of 8 (1 of each color), Black, Brown, Red, Orange, Yellow, Green, Blue, Violet.

(X2) Gray

Impedance: 50 Ohm Ref.

Capacitance: 29 pF/ft +/- 3 pF/ft Ref.

SEPARATOR: PTFE

BRAID: 40 AWG SPC, >90% coverage

JACKET: PVC

COLOR: Black

This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	A	4133	Preliminary Release.	KP	12/15/14