

# ALUMINUM ELECTROLYTIC CAPACITORS



nichicon



Miniature Sized, Low Impedance, High Reliability




- Low impedance and high reliability withstanding 4000hours to 10000hours.

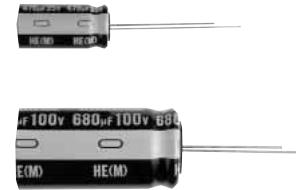

## ■ Specifications


Item	Performance Characteristics													
Category Temperature Range	-40 ~ +105°C													
Rated Voltage Range	6.3 ~ 100V													
Rated Capacitance Range	6.8 ~ 18000μF													
Capacitance Tolerance	±20% at 120Hz, 20°C													
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.													
tan δ	Rated voltage (V)		6.3	10	16	25	35	50	63	100				
	tan δ (MAX.)		0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08				
For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.														
Stability at Low Temperature	Rated voltage (V)		6.3	10	16	25	35	50	63	100				
	Impedance ratio Z-25°C / Z+20°C		4	3	2	2	2	2	2	2				
	ZT / Z20 (MAX.) Z-40°C / Z+20°C		8	6	4	3	3	3	3	3				
Endurance	After an application of D.C. bias voltage plus the rated ripple current for stated in the below at 105°C the peak voltage shall not exceed the rated D.C. voltage, capacitors shall meet the following requirements.													
	Case size			φD ≤ 6.3	φD = 8, 10	φD ≥ 12.5								
	Rated voltage (V)	6.3 ~ 10WV		4000hours	6000hours	8000hours								
		16 ~ 100WV		5000hours	7000hours	10000hours								
	Capacitance change		Within ± 25% of initial value											
	tan δ		200% or less of initial specified value											
Marking	Leakage current									Initial specified value or less				
	Printed with white color letter on black sleeve.													

## ■ Radial Lead Type

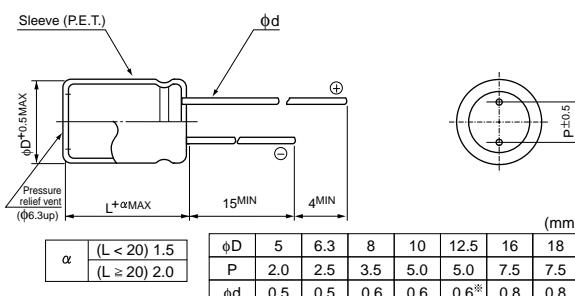

\*In case L > 25 for the φ12.5 dia. unit, lead dia. φd = 0.8mm

## Type numbering system (Example : 10V 1000μF)

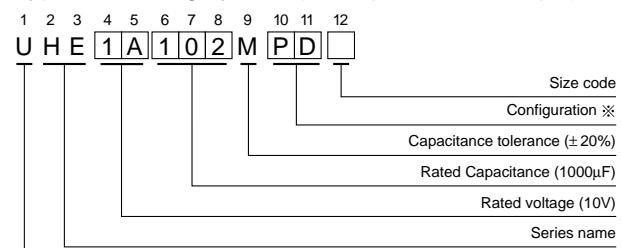

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve	Sn-Pb finished leadwire PVC sleeve (containing Pb)
5	DD	DH
6.3	ED	EH
8 · 10	PD	PH
12.5 ~ 18	HD	HH

※ Please contact to us if other configurations are required.

## ● Frequency coefficient of rated ripple current

Cap. (μF)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz~
6.8 ~ 33		0.45	0.55	0.70	0.90	1.00
39 ~ 330		0.60	0.70	0.85	0.95	1.00
390 ~ 1000		0.65	0.75	0.90	0.98	1.00
1200 ~ 18000		0.75	0.80	0.95	1.00	1.00

Please refer to page 19, 20, 21 about the formed or taped product spec.  
Please refer to page 3 for the minimum order quantity.

● Dimension table in next page.

CAT.8100T

**HE** series

## ■ Standard ratings

Cap.(μF)	V (Code)	Item Code	6.3 (0J)				10 (1A)			
			Case size φD × L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms) 105°C / 100kHz
				20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
100	101						5 × 11	0.58	2.3	210
150	151	5 × 11	0.58	2.3	210					
220	221						6.3 × 11	0.22	0.87	340
330	331	6.3 × 11	0.22	0.87	340					
470	471						8 × 11.5	0.13	0.52	640
680	681	8 × 11.5	0.13	0.52	640		8 × 15	0.087	0.35	840
						▲ 10 × 12.5	0.080	0.32	865	
820	821	10 × 12.5	0.080	0.32	865					
1000	102	8 × 15	0.087	0.35	840		8 × 20	0.069	0.27	1050
						▲ 10 × 16	0.060	0.24	1210	
1200	122	8 × 20	0.069	0.27	1050		10 × 20	0.046	0.18	1400
		▲ 10 × 16	0.060	0.24	1210					
1500	152	10 × 20	0.046	0.18	1400		10 × 25	0.042	0.17	1650
						▲ 12.5 × 15	0.049	0.16	1450	
1800	182	12.5 × 15	0.049	0.16	1450					
2200	222	10 × 25	0.042	0.17	1650		10 × 31.5	0.031	0.12	1910
						▲ 12.5 × 20	0.035	0.12	1900	
						● 16 × 15	0.042	0.12	1940	
2700	272	▲ 10 × 31.5	0.031	0.12	1910		18 × 15	0.043	0.11	2210
		16 × 15	0.042	0.12	1940					
3300	332	12.5 × 20	0.035	0.12	1900		12.5 × 25	0.027	0.089	2230
3900	392	12.5 × 25	0.027	0.089	2230		12.5 × 31.5	0.024	0.078	2650
		▲ 18 × 15	0.043	0.11	2210		▲ 16 × 20	0.027	0.078	2530
4700	472	12.5 × 31.5	0.024	0.078	2650		12.5 × 35.5	0.020	0.065	2880
5600	562	12.5 × 35.5	0.020	0.065	2880		12.5 × 40	0.017	0.056	3350
		▲ 16 × 20	0.027	0.078	2530		▲ 16 × 25	0.021	0.060	2930
		● 18 × 20	0.026	0.067	2860		● 18 × 20	0.026	0.067	2860
6800	682	12.5 × 40	0.017	0.056	3350		16 × 31.5	0.017	0.050	3450
		▲ 16 × 25	0.021	0.060	2930					
		● 18 × 20	0.026	0.067	2860		▲ 18 × 25	0.019	0.049	3140
8200	822	16 × 31.5	0.017	0.050	3450		16 × 35.5	0.015	0.044	3610
						▲ 18 × 31.5	0.015	0.040	4170	
10000	103	16 × 35.5	0.015	0.044	3610		16 × 40	0.013	0.038	4080
		▲ 18 × 25	0.019	0.049	3140		▲ 18 × 35.5	0.014	0.038	4220
12000	123	16 × 40	0.013	0.038	4080		18 × 40	0.012	0.032	4280
		▲ 18 × 31.5	0.015	0.040	4170					
15000	153	18 × 35.5	0.014	0.038	4220					
18000	183	18 × 40	0.012	0.032	4280					

▲: In this case, [6] will be put 12th digit type numbering system.  
 ●: In this case, [3] will be put 12th digit type numbering system.

## ■ Standard ratings

Cap.(μF)	V (Code)	Item Code	16 (1C)				25 (1E)			
			Case size φD × L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms) 105°C / 100kHz
				20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
47	470						5 × 11	0.58	2.3	210
56	560	5 × 11	0.58	2.3	210					
100	101						6.3 × 11	0.22	0.87	340
120	121	6.3 × 11	0.22	0.87	340					
220	221						8 × 11.5	0.13	0.52	640
330	331	8 × 11.5	0.13	0.52	640		8 × 15	0.087	0.35	840
		▲ 10 × 12.5	0.080	0.32	865	▲ 10 × 12.5	0.080	0.32	865	
470	471	8 × 15	0.087	0.35	840		8 × 20	0.069	0.27	1050
		▲ 10 × 12.5	0.080	0.32	865	▲ 10 × 16	0.06	0.24	1210	
680	681	8 × 20	0.069	0.27	1050		10 × 20	0.046	0.18	1400
		▲ 10 × 16	0.060	0.24	1210	▲ 12.5 × 15	0.049	0.16	1450	
820	821						10 × 25	0.042	0.17	1650
		10 × 20	0.046	0.18	1400		10 × 31.5	0.031	0.12	1910
1000	102	▲ 12.5 × 15	0.049	0.16	1450	▲ 12.5 × 20	0.035	0.12	1900	
		● 16 × 15				● 16 × 15	0.042	0.12	1940	
1200	122	10 × 25	0.042	0.17	1650		18 × 15	0.043	0.11	2210
1500	152	10 × 31.5	0.031	0.12	1910		12.5 × 25	0.027	0.089	2230
		▲ 12.5 × 20	0.035	0.12	1900		● 16 × 15			
		● 16 × 15	0.042	0.12	1940		12.5 × 31.5	0.024	0.078	2650
1800	182						▲ 16 × 20	0.027	0.078	2530
2200	222	12.5 × 25	0.027	0.089	2230		12.5 × 35.5	0.020	0.065	2880
		▲ 18 × 15	0.043	0.11	2210	▲ 18 × 20	0.026	0.067	2860	
2700	272	12.5 × 31.5	0.024	0.078	2650		12.5 × 40	0.017	0.056	3350
		▲ 16 × 20	0.027	0.078	2530	▲ 16 × 25	0.021	0.060	2930	
3300	332	12.5 × 35.5	0.020	0.065	2880		16 × 31.5	0.017	0.050	3450
		● 16 × 20	0.026	0.067	2860	▲ 18 × 25	0.019	0.049	3140	
3900	392	12.5 × 40	0.017	0.056	3350		16 × 35.5	0.015	0.044	3610
		▲ 16 × 25	0.021	0.060	2930		● 16 × 20			
		● 16 × 20	0.026	0.067	2860	▲ 18 × 31.5	0.015	0.040	4170	
4700	472	16 × 31.5	0.017	0.050	3450		16 × 40	0.013	0.038	4080
		▲ 18 × 25	0.019	0.049	3140	▲ 18 × 35.5	0.014	0.038	4220	
5600	562	16 × 35.5	0.015	0.044	3610		18 × 40	0.012	0.032	4280
		▲ 18 × 31.5	0.015	0.040	4170					
6800	682	16 × 40	0.013	0.038	4080					
8200	822	18 × 35.5	0.014	0.038	4220					
10000	103	18 × 40	0.012	0.032	4280					

▲: In this case, [6] will be put 12th digit type numbering system.

●: In this case, [3] will be put 12th digit type numbering system.

**HE** series

## ■ Standard ratings

Cap.(μF)	V (Code)	Item Code	35 (1V)				50 (1H)			
			Case size φD × L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms) 105°C / 100kHz
				20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
22	220						5 × 11	0.70	2.8	180
33	330	5 × 11	0.58	2.3	210					
47	470									
56	560	6.3 × 11	0.22	0.87	340	6.3 × 11	0.30	1.2	295	
100	101					8 × 11.5	0.17	0.68	555	
120	121					8 × 15	0.12	0.48	730	
150	151	8 × 11.5	0.13	0.52	640	10 × 12.5	0.12	0.48	760	
180	181					8 × 20	0.091	0.36	910	
220	221	8 × 15	0.087	0.35	840	10 × 16	0.084	0.34	1050	
		▲10 × 12.5	0.080	0.32	865					
270	271	8 × 20	0.069	0.27	1050	10 × 20	0.060	0.24	1220	
						▲12.5 × 15	0.061	0.20	1260	
330	331	10 × 16	0.060	0.24	1210	10 × 25	0.055	0.22	1440	
470	471	10 × 20	0.046	0.18	1400	10 × 31.5	0.043	0.17	1690	
		▲12.5 × 15	0.049	0.16	1450	▲12.5 × 20	0.045	0.15	1660	
						● 16 × 15	0.055	0.17	1690	
560	561	10 × 25	0.042	0.17	1650	12.5 × 25	0.034	0.11	1950	
						18 × 15	0.054	0.15	1930	
680	681	10 × 31.5	0.031	0.12	1910					
		▲12.5 × 20	0.035	0.12	1900	12.5 × 31.5	0.030	0.10	2310	
		● 16 × 15	0.042	0.12	1940					
820	821					12.5 × 35.5	0.025	0.083	2510	
						▲16 × 20	0.034	0.10	2210	
1000	102	12.5 × 25	0.027	0.089	2230	12.5 × 40	0.021	0.069	2920	
		▲18 × 15	0.043	0.11	2210	▲16 × 25	0.025	0.075	2555	
						●18 × 20	0.036	0.097	2490	
1200	122	12.5 × 31.5	0.024	0.078	2650	16 × 31.5	0.022	0.066	3010	
		▲16 × 20	0.027	0.078	2530	▲18 × 25	0.026	0.070	2740	
1500	152	12.5 × 35.5	0.020	0.065	2880	16 × 35.5	0.019	0.057	3150	
1800	182	12.5 × 40	0.017	0.056	3350	16 × 40	0.016	0.048	3710	
		▲16 × 25	0.021	0.060	2930					
		●18 × 20	0.026	0.067	2860	▲18 × 31.5	0.021	0.057	3635	
2200	222	16 × 31.5	0.017	0.050	3450	▲18 × 35.5	0.017	0.046	3680	
		▲18 × 25	0.019	0.049	3140					
2700	272	16 × 35.5	0.015	0.044	3610	18 × 40	0.014	0.038	3800	
		▲18 × 31.5	0.015	0.040	4170					
3300	332	16 × 40	0.013	0.038	4080					
		▲18 × 35.5	0.014	0.038	4220					
3900	392	18 × 40	0.012	0.032	4280					

▲ : In this case, [6] will be put 12th digit type numbering system.  
 ● : In this case, [3] will be put 12th digit type numbering system.

**HE** series

## ■ Standard ratings

Cap.( $\mu$ F)	V (Code)	Item Code	63 (1J)				100 (2A)			
			Case size $\phi$ D × L (mm)	Impedance ( $\Omega$ MAX.)		Rated ripple (mA rms) 105°C / 100kHz	Case size $\phi$ D × L (mm)	Impedance ( $\Omega$ MAX.)		Rated ripple (mA rms) 105°C / 100kHz
				20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
6.8	6R8						5 × 11	2.3	9.3	55
15	150	5 × 11	2.3	9.3	55	6.3 × 11	1.2	5.0	115	
27	270					8 × 11.5	0.63	2.8	232	
33	330	6.3 × 11	1.2	5.0	115					
39	390					8 × 15	0.45	2.1	300	
47	470					10 × 12.5	0.43	1.8	288	
56	560	8 × 11.5	0.63	2.8	232	8 × 20	0.33	1.6	362	
68	680					10 × 16	0.31	1.5	357	
82	820	8 × 15	0.45	2.1	300	10 × 20	0.21	0.94	466	
		▲10 × 12.5	0.43	1.8	288	▲12.5 × 15	0.23	1.1	466	
100	101					10 × 25	0.20	0.84	531	
120	121	8 × 20	0.33	1.6	362	10 × 31.5	0.15	0.71	663	
		▲10 × 16	0.31	1.5	357	▲12.5 × 20	0.16	0.64	690	
150	151					16 × 15	0.14	0.66	795	
180	181	10 × 20	0.21	0.94	466	12.5 × 25	0.12	0.45	784	
		▲12.5 × 15	0.23	1.1	466	▲18 × 15	0.12	0.50	920	
220	221	10 × 25	0.20	0.84	531	12.5 × 31.5	0.10	0.42	905	
						▲16 × 20	0.091	0.38	1040	
270	271	10 × 31.5	0.15	0.71	663	12.5 × 35.5	0.083	0.35	1050	
		▲12.5 × 20	0.16	0.64	690					
		● 16 × 15	0.14	0.66	795	▲16 × 25	0.073	0.27	1250	
330	331	12.5 × 25	0.12	0.45	784	12.5 × 40	0.071	0.30	1180	
						▲18 × 20	0.080	0.30	1240	
390	391	18 × 15	0.12	0.50	920	16 × 31.5	0.054	0.20	1570	
						▲18 × 25	0.057	0.21	1490	
470	471	12.5 × 31.5	0.10	0.42	905	16 × 35.5	0.045	0.17	1790	
		▲16 × 20	0.091	0.38	1040	▲18 × 31.5	0.047	0.17	1630	
560	561	12.5 × 35.5	0.083	0.35	1050	16 × 40	0.040	0.15	2020	
		▲16 × 25	0.073	0.27	1250					
680	681	12.5 × 40	0.071	0.30	1180	18 × 35.5	0.040	0.15	1790	
		▲18 × 20	0.080	0.30	1240					
820	821	16 × 31.5	0.054	0.20	1570	18 × 40	0.036	0.13	2330	
		▲18 × 25	0.057	0.21	1490					
1000	102	16 × 35.5	0.045	0.17	1790					
		▲18 × 31.5	0.047	0.17	1630					
1200	122	16 × 40	0.040	0.15	2020					
		▲18 × 35.5	0.040	0.15	1790					
1500	152	18 × 40	0.036	0.13	2330					

▲ : In this case, [6] will be put 12th digit type numbering system.  
 ● : In this case, [3] will be put 12th digit type numbering system.