

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

RS


Compact & Low-profile Sized



Smaller

Anti-Solvent
Feature
(Through 100V only)

- More compact & low profile case sizes than VS series.
- Compliant to the RoHS directive (2002/95/EC).




■ Specifications

Item	Performance Characteristics																
Category Temperature Range	-40 to +85°C																
Rated Voltage Range	6.3 to 400V																
Rated Capacitance Range	0.1 to 10000μF																
Capacitance Tolerance	±20% at 120Hz, 20°C																
Leakage Current	Rated voltage (V)		6.3 to 100					160 to 400									
			After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater. After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.					After 1 minute's application of rated voltage. I = 0.04CV+100 (μA) or less									
Tangent of loss angle (tan δ)	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF. Measurement frequency : 120Hz, Temperature : 20°C																
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400				
	tan δ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.020	0.020	0.20	0.25				
Stability at Low Temperature	Measurement frequency : 120Hz																
	Rated voltage (V)		6.3	10	16	25	35	50	63	100	160	200	250	400			
	Impedance ratio	Z-25°C / Z+20°C	5	4	3	2	2	2	2	2	3	3	3	6			
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	12	10	8	5	4	3	3	3	4	4	6	10			
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C.					Capacitance change		Within ±20% of the initial capacitance value									
						tan δ		200% or less than the initial specified value									
						Leakage current		Less than or equal to the initial specified value									
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																
Marking	Printed with white color letter on black sleeve.																


■ Radial Lead Type

Type numbering system (Example : 10V 330μF)

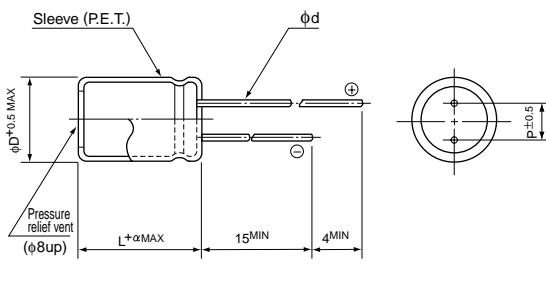

(mm)							
φD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8

α	(φD<20) 1.5
	(φD≥20) 2.0

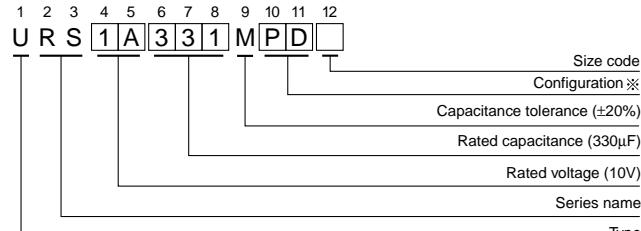

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
5 · 6.3	DD
8 · 10	PD
12.5 to 18	HD
20	RD

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

- Dimension table in next page.

CAT.8100Y

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

RS series

■Dimensions

Cap.(μ F)	V	6.3		10		16		25		35		50			
		Code	0J		1A		1C		1E		1V		1H		
0.1	0R1												5×9	1.1	
0.22	R22												5×9	2.3	
0.33	R33												5×9	3.5	
0.47	R47												5×9	5	
1	010												5×9	13	
2.2	2R2												5×9	26	
3.3	3R3												5×9	35	
4.7	4R7												5×9	40	
10	100							5×9	40	5×9	50	5×9	55	5×9	65
22	220	5×9	35	5×9	55	5×9	70	5×9	75	5×9	95	5×9	90		
33	330	5×9	55	5×9	75	5×9	85	5×9	95	5×9	100	6.3×9	120		
47	470	5×9	75	5×9	90	5×9	100	5×9	110	6.3×9	130	6.3×9	140		
100	101	5×9	125	5×9	135	6.3×9	160	6.3×9	180	8×9	220	10×9	240		
220	221	6.3×9	200	6.3×9	220	8×9	290	10×9	310	10×9	340	10×12.5	420		
330	331	6.3×9	250	8×9	300	10×9	360	10×9	380	10×12.5	480	12.5×12.5	530		
470	471	8×9	330	8×9	360	10×9	410	10×12.5	530	12.5×12.5	590	16×15	750		
1000	102	10×9	510	10×12.5	620	12.5×12.5	720	12.5×15	830	16×15	1010	18×20	1160		
2200	222	12.5×15	890	12.5×15	960	16×15	1160	18×15	1360	18×20	1560	20×25	1750		
3300	332	16×15	1200	16×15	1300	18×15	1460	18×20	1720	20×25	2000				
4700	472	16×15	1410	18×15	1550	18×20	1770	18×25	2050						
6800	682	18×15	1660	18×20	1850	18×25	2170								
10000	103	18×20	2020	18×25	2350										
													Case size Φ D×L (mm)	Rated ripple	

Cap.(μ F)	V	63		100		160		200		250		400		
		Code	1J	2A		2C		2D		2E		2G		
0.1	0R1			5×9	1.9									
0.22	R22			5×9	4.5									
0.33	R33			5×9	6.5									
0.47	R47			5×9	8									
1	010			5×9	17									
2.2	2R2			5×9	26									
3.3	3R3			5×9	35									
4.7	4R7			6.3×9	45									
10	100	5×9	60	6.3×9	70								16×15	140
22	220	6.3×9	100	8×9	130								● 18×15	280
33	330	8×9	140	10×9	180								● 18×15	350
47	470	8×9	170	10×12.5	230	16×15	420	● 18×15	420	△ 18×20	420	★ 18×25	420	
68	680					● 18×15	490	△ 18×20	490	18×20	490	20×25	490	
100	101	10×9	250	12.5×15	370	△ 18×20	590	★ 18×25	590	18×25	590			
150	151					★ 18×25	710	18×25	710					
220	221	12.5×12.5	490	16×15	620	20×25	770							
330	331	12.5×15	710	18×15	760									
470	471	16×15	900										Case size Φ D×L (mm)	Rated ripple

Rated ripple current (mA rms) at 85°C 120Hz

Size $\Phi 16 \times 20$ is available for capacitors marked "●".
Size $\Phi 20 \times 15$ is available for capacitors marked "△".
Size $\Phi 20 \times 20$ is available for capacitors marked "★".

In this case, [6] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

V	Cap.(μ F)	Frequency	50Hz	120Hz	300Hz	1 kHz	10 kHz or more
		Less than 47	0.75	1.00	1.35	1.57	2.00
6.3 to 100		100 to 470	0.80	1.00	1.23	1.34	1.50
		1000 or more	0.85	1.00	1.10	1.13	1.15
160 to 400		10 to 220	0.80	1.00	1.25	1.40	1.60