


**Miniature SOP4-pin type
Low CxR 60V/80V
load voltage**

**PhotoMOS®
RF SOP 1 Form A CxR
(AQY22OROS)**

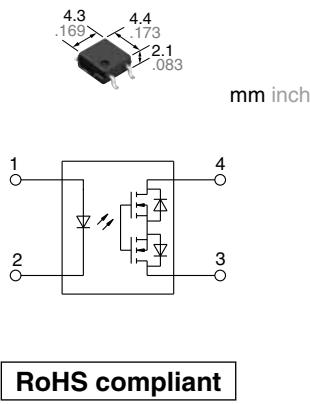

RoHS compliant

FEATURES

1. Low capacitance and low on resistance (Load voltage: 60 to 80V)

	AQY222R1S	AQY225R1S	AQY225R2S
Output capacitance (Cout)	Typ. 24.5pF	Typ. 37.5pF	Typ. 4.5pF
On resistance (Ron)	Typ. 0.8Ω	Typ. 0.8Ω	Typ. 10.5Ω

2. Miniature SOP4-pin package

(W)4.3 × (L)4.4 × (H)2.1 mm
(W).169 × (L).173 × (H).083 inch

3. Low-level off-state leakage current of Typ. 0.01 nA (AQY225R2S)

4. Controls low-level analog signals

TYPICAL APPLICATIONS

1. Measuring and testing equipment

IC tester, Liquid crystal driver tester, Semiconductor performance tester, Bare board tester, In-circuit tester, Function tester, etc.

2. Telecommunication and broadcasting equipment

3. Medical equipment

4. Multi-point recorder

Data logger, Warping and Thermocouple, etc.

TYPES

AC/DC dual use	Output rating*		Package	Part No.			Packing quantity		
	Load voltage	Load current		Tape and reel packing style		Tube	Tape and reel		
				Tube packing style	Picked from the 1/2-pin side				
AC/DC dual use	60V	0.5A	SOP4-pin	AQY222R1S	AQY222R1SX	AQY222R1SZ	1 tube contains: 100 pcs. 1 batch contains: 2,000 pcs.	1,000 pcs.	
	80V	0.35A		AQY225R1S	AQY225R1SX	AQY225R1SZ			
	80V	0.15A		AQY225R2S	AQY225R2SX	AQY225R2SZ			

* Indicate the peak AC and DC values.

Note: For space reasons, the three initial letters of the part number "AQY", the package (SOP) indicator "S" and the packing style indicator "X" or "Z" are not marked on the device. (Ex. the label for product number AQY222R1SX is 222R1)

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY222R1S	AQY225R1S	AQY225R2S	Remarks
Input	LED forward current	I _F		50mA		
	LED reverse voltage	V _R		5V		
	Peak forward current	I _{FP}		1A		f=100 Hz, Duty factor=0.1%
	Power dissipation	P _{in}		75mW		
Output	Load voltage (peak AC)	V _L	60V	80V		
	Continuous load current	I _L	0.5A	0.35A	0.15A	Peak AC, DC
	Peak load current	I _{peak}	1A	0.7A	0.45A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}		300mW		
Total power dissipation		P _T		350mW		
I/O isolation voltage		V _{iso}		1,500Vrms		
Ambient temperature	Operating	T _{opr}		−40 to +85°C	−40 to +185°F	(Non-icing at low temperatures)
	Storage	T _{stg}		−40 to +100°C	−40 to +212°F	


RF SOP 1 Form A CxR (AQY22OROS)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY222R1S	AQY225R1S	AQY225R2S	Condition
Input	LED operate current	Typical Maximum	I_{Fon}	0.5 mA		$I_L = \text{Max.}$
				3.0 mA		
	LED turn off current	Minimum	I_{Foff}	0.1 mA		$I_L = \text{Max.}$
		Typical		0.45 mA		
Output	LED dropout voltage	Typical	V_F	1.32 V (1.14 V at $I_F = 5 \text{ mA}$)		$I_F = 50 \text{ mA}$
		Maximum		1.5 V		
	On resistance	Typical	R_{on}	0.8Ω		$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$
		Maximum		1.2Ω		
Transfer characteristics	Output capacitance	Typical	C_{out}	24.5 pF	37.5 pF	4.5 pF
		Maximum		30 pF	45 pF	6.0 pF
	Off state leakage current	Typical	I_{Leak}	0.05 nA	0.03 nA	0.01 nA
		Maximum		*10 nA		$I_F = 0 \text{ mA}$ $V_L = \text{Max.}$
	Turn on time**	Typical	T_{on}	0.15 ms	0.25 ms	0.05 ms
		Maximum		0.5ms	0.75ms	0.5ms
	Turn off time**	Typical	T_{off}	0.06 ms	0.08 ms	0.05 ms
		Maximum		0.2 ms		$I_F = 5 \text{ mA}$ $V_L = 10\text{V}$ $R_L = 100\Omega$
	I/O capacitance	Typical	C_{iso}	0.8 pF		$f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$
		Maximum		1.5 pF		
	Initial I/O isolation resistance	Minimum	R_{iso}	1,000MΩ		500 V DC

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

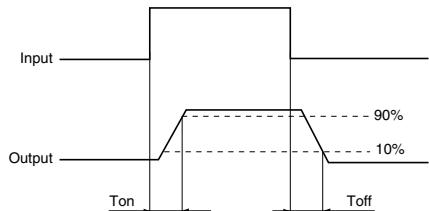

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.


Item		Symbol	Min.	Max.	Unit
AQY222R1S	LED current	I_F	5	30	mA
	Load voltage (Peak AC)	V_L	—	30	V
AQY225R1S	Continuous load current	I_L	—	0.5	A
	Load voltage (Peak AC)	V_L	—	40	V
AQY225R2S	Continuous load current	I_L	—	0.35	A
	Load voltage (Peak AC)	V_L	—	40	V
	Continuous load current	I_L	—	0.15	A

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics
Allowable ambient temperature: -40 to +85°C
-40 to +185°F

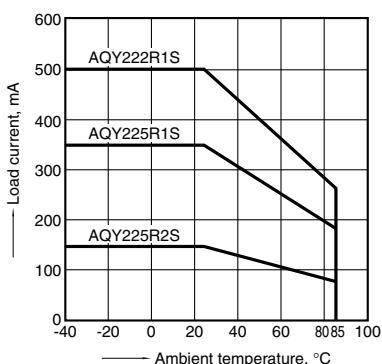


2.-1) On resistance vs. ambient temperature characteristics
Measured portion: between terminals 3 and 4
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max. (DC)

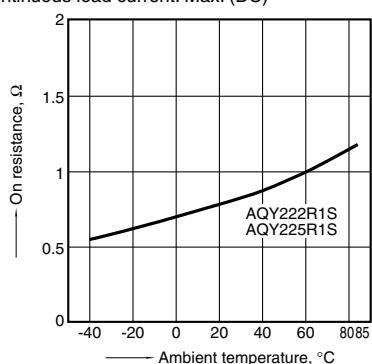


2.-2) On resistance vs. ambient temperature characteristics
Measured portion: between terminals 3 and 4
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max. (DC)

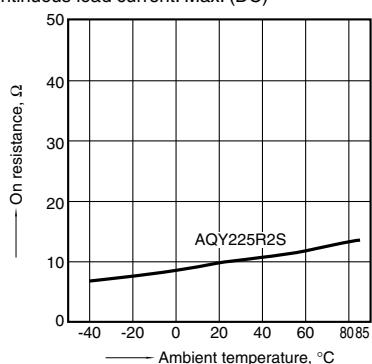


3. Turn on time vs. ambient temperature characteristics
LED current: 5 mA; Load voltage: 10V (DC)
Continuous load current: 100mA (DC)

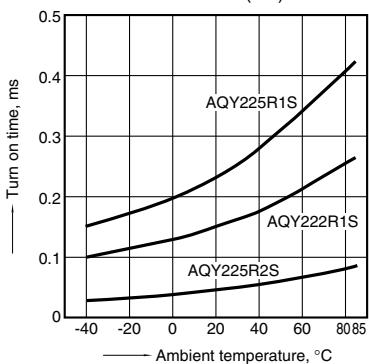


4. Turn off time vs. ambient temperature characteristics
LED current: 5 mA; Load voltage: 10V (DC)
Continuous load current: 100mA (DC)

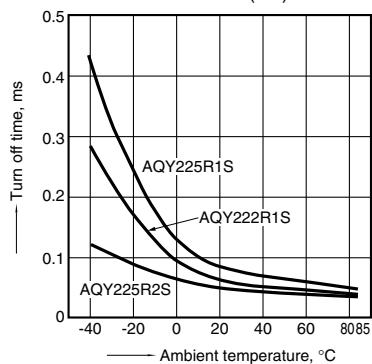


5. LED operate current vs. ambient temperature characteristics
Load voltage: Max. (DC)
Continuous load current: Max. (DC)

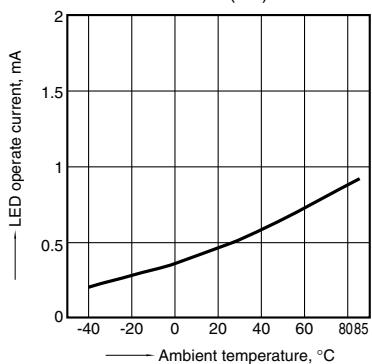


6. LED turn off current vs. ambient temperature characteristics
Load voltage: Max. (DC)
Continuous load current: Max. (DC)

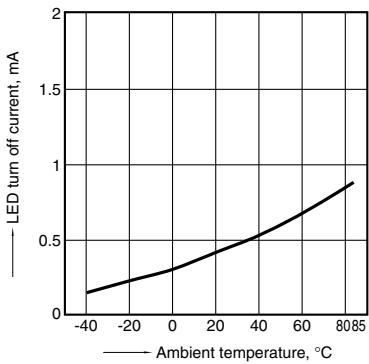


7. LED dropout voltage vs. ambient temperature characteristics
LED current: 5 to 50 mA

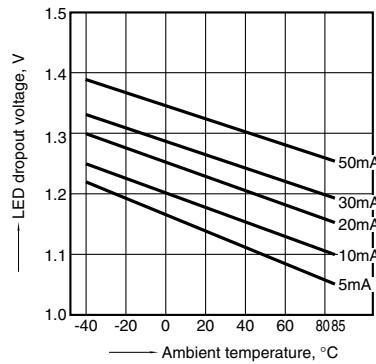


8.-1) Current vs. voltage characteristics of output at MOS portion
Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F




8.-2) Current vs. voltage characteristics of output at MOS portion
Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F



8.-3) Current vs. voltage characteristics of output at MOS portion
Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics
Measured portion: between terminals 3 and 4
Ambient temperature: 25°C 77°F

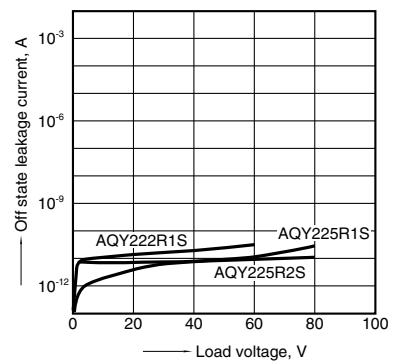

RF SOP 1 Form A CxR (AQY220ROS)

10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC)
Continuous load current: 100mA (DC)
Ambient temperature: 25°C 77°F

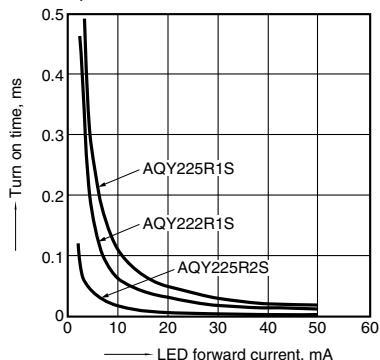


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4
Frequency: 1 MHz, 30mVrms
Ambient temperature: 25°C 77°F


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4
Load voltage: 10V (DC)
Continuous load current: 100mA (DC)
Ambient temperature: 25°C 77°F

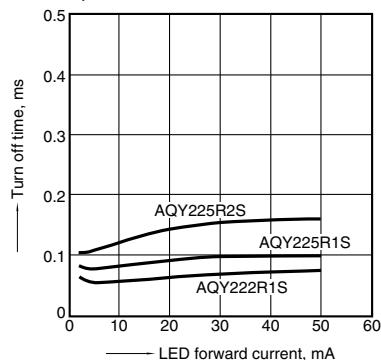


12.-1) Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4
Frequency: 1 MHz, 30mVrms
Ambient temperature: 25°C 77°F

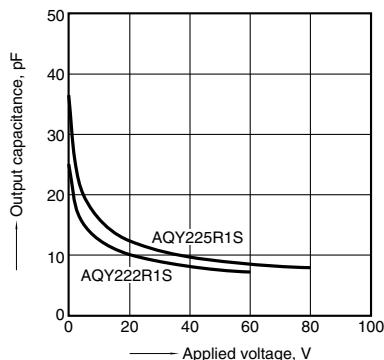

12.-2) Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4
Frequency: 1 MHz, 30mVrms
Ambient temperature: 25°C 77°F

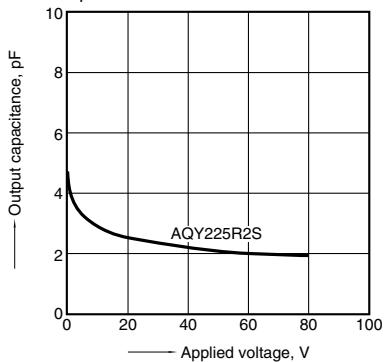

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

ASCTB155E 201703-T

Specifications are subject to change without notice.