Search Results

Evaluate
- FAQ's
Design a Solution
- Part Drawings
- PDF-Push Barb Mo..
How to Buy
- Bill of Material
- Favorite Products List
- Locate Distributor

Current refinements (click ☒ to remove) Search Tips

☒ **Text Search: 'PMA-065-B2S-D0'**

Your search criteria matched only one product, shown below

PMA-065-B2S-D0

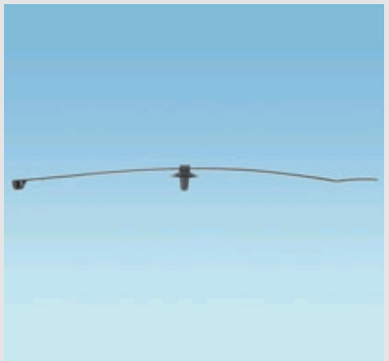

• Robust barb design provides increased retention and lower insertion force, reducing operator fatigue and improving productivity
• Exclusive contoured anvil head firmly retains a minimum wire gauge of 12 AWG (2mm diameter) within plus or minus 10mm (.394") of the initial installation point, providing a low profile design
• Assemblies with BT2S cable ties provide routing and anchoring for wire harnesses, significantly reducing harness assembly time

Part Number	PMA-065-B2S-D0
RoHS Compliancy Status	Compliant
Part Description	Push Barb Arrow Head Assembly
Product Type	Cable Tie Mounts- Through Panel Hole
Material	Weather Resistant Nylon 6.6
Color	Black
CE Compliant	No
Environment	Outdoor
Head Diameter (In.)	0.65
Head Diameter (mm)	16.5
Mounting Method	Arrow Head Barb
Nominal Hole Diameter (In.)	0.250
Nominal Hole Diameter (mm)	6.4
Overall Height (In.)	0.60
Overall Height (mm)	15.3
Panel Thickness (In.)	0.08
Panel Thickness (mm)	2.0
Pricing Description	Push Barb Arrow Head Assembly, WR BL
Sub Brand	Cable Tie and Mount
Type	Through Hole
Min. Order UOM	PC
Min. Order Qty.	500
BOM Qty. (# of Pkgs.)	0
Add to Favorite Product List	e

Please register to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.

Copyright © 1995-2011, PANDUIT CORP. All rights reserved. | Legal Information | Privacy Policy