

Model No.: TA6FC00-04  
Product Line: Tymphany


Rev: 1  
Last Update: 2018-12-13 09:14:09

## Product Description

This 2 inch 4 ohm member of the new TA family sets a high standard for compact full range drivers. Intended for applications such as television soundbars and other compact applications in mind. Design features in this family include a stiff steel basket with venting under the spider to aid cooling of the motor, a NdFeB magnet motor with copper cap to lower coil inductance, providing low distortion at low frequencies and extended high frequency response. A black anodized aluminium cone and a black anodized aluminium dust cap are employed on the driver, coupled directly to the voice coil.




## Mechanical Drawing

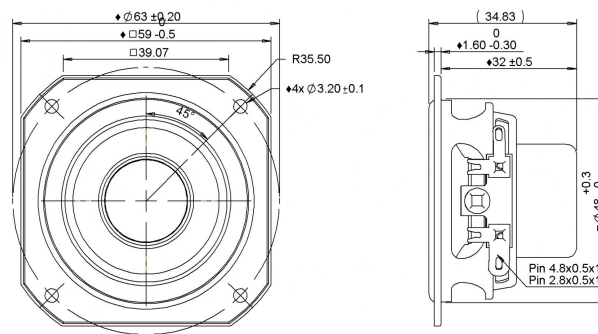

## Specifications

DC Resistance	Revc	Ohms	3.38	5.0%	Energy Bandwidth Product	EBP	(1/Qes)*fs	
Minimum Impedance	Zmin	Ohms	4.08	7.5%	Moving Mass	Mms	g	1.4
Voice Coil Inductance	Le	mH	0.03		Suspension Compliance	Cms	um/N	595.4
Resonant Frequency	Fs	Hz	177.55	15%	Effective Cone diameter	D	cm	4.4
Mechanical Q Factor	Qms		2.63		Effective Piston Area	Sd	cm^2	15.2
Electrical Q Factor	Qes	1.14			Effective Volume	Vas	L	0.19
Total Q Factor	Qts		0.79		Motor Force Factor	BL	Tm	2.12
Ratio Fs/Qts	F	Fs/Qts	223.9		Motor Efficiency Factor	β	(T*M^2)/Ohms	1.3
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	85.31	+/- 1.0db	Voice coil former Material	VCfm		ASV
Half Space Sensitivity @1W/1M	db@1W/1M	dB	82.4	+/- 1.0db	Voice coil inner diameter	VCd	mm	19.32
Gap Height	Gh	mm	3		Rated Noise Power	P	W	10
Maximum Linear Excursion	Xmax	mm	1.1		Test Spectrum Bandwidth		100hz-20Khz	
Ferrofluid Type	FF				Driver Size	Inch	2 in	
Driver Mass	Kg	0.08						

## Frequency and Impedance Response

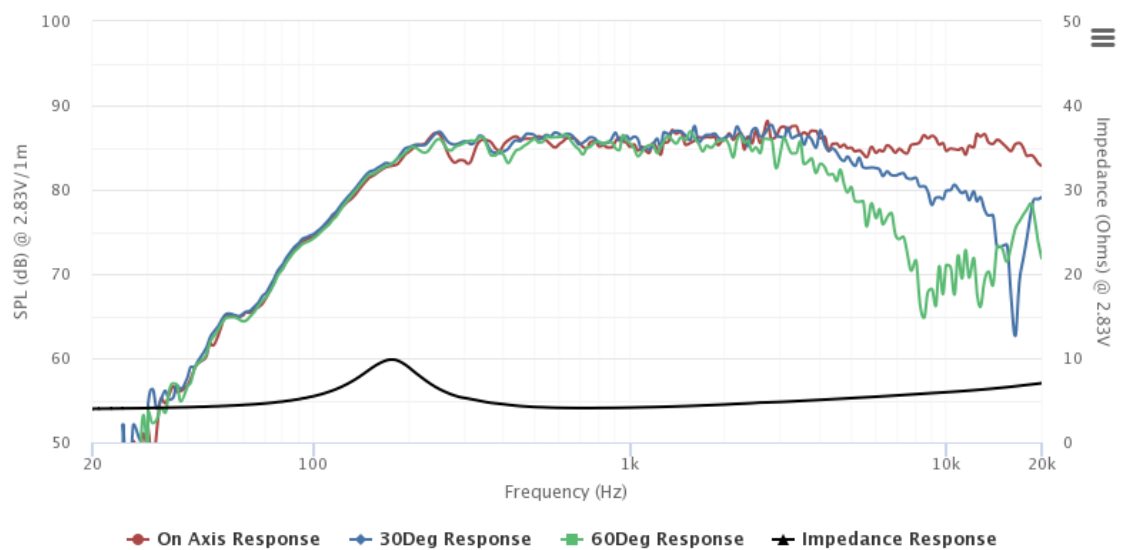

Highcharts.com