

Marker card - SK 3,8 REEL P7,5 WH CUS - 0825127

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Marker card, can be ordered: By card, white, labeled according to customer specifications, mounting type: adhesive, for terminal block width: 7.5 mm, lettering field size: continuous x 3.8 mm

The figure shows a version of the article

Why buy this product

- ✓ The SK labeling range offers self-adhesive marker strips for labeling products that do not have a marker groove
- ✓ Labeling service: Phoenix Contact can custom-label SK markers according to your requirements
- ✓ The SK labeling range offers self-adhesive marker strips for labeling products that do not have a marker groove



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 354028
GTIN	4046356354028

Technical data

Dimensions

Width (a)	3.8 mm
-----------	--------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 150 °C
Ambient temperature (assembly)	> 15 °C
Recommended storage conditions	23 °C / 50% relative humidity. Storage in the original packaging is recommended prior to processing.

General

Note	Marking up to max. 25-pos.
Color	white
Type	adhesive
Components	free from silicone and halogen

Marker card - SK 3,8 REEL P7,5 WH CUS - 0825127

Technical data

General

Material	Polyester
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of marker strips	12
Adhesive	Acrylic
Printability	Thermal transfer
Device	5146477 THERMOMARK ROLL
	5146231 THERMOMARK X1.2
Ink ribbon	5145384 THERMOMARK-RIBBON 110
Test for substances that would hinder coating with paint or varnish	VW PV 3.10.7:2005-02
Result	Test passed
Test specification weathering-resistance	Following ISO 4892-2:2013-03
Test duration	96 h
Wipe resistance test result	Test passed
Salt spray test specification	DIN EN 60068-2-11:2000-02
Test duration	96 h
Salt spray testing result	Test passed
Alternating condensation climate with SO2 test specification	DIN 50018:2013-05
Climate level	AHT 1.0 S
Cycles	2
Condensation test result	Test passed
Wipe resistance of test specification inscriptions	DIN EN 61010-1 (VDE 0411-1):2011-07
Result	Test passed
Foil strength	53 µm
Adhesive strength	20 µm
Marking mounting type	adhesive

Standards and Regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
-----------------	-----------------------------


Environmental Product Compliance

China RoHS	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"
------------	---

Drawings

Marker card - SK 3,8 REEL P7,5 WH CUS - 0825127

Schematic diagram

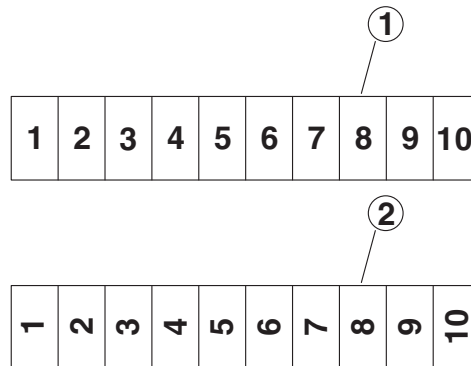

- ① Horizontal
- ② Vertical

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>