

Coding profile - HC-MOD-K-CP - 1408562

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Coding profile for HC-MOD-K... housing



Product Description

Coding profile
Block with 8 pcs.



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 619301
GTIN	4046356619301

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
---------------------------------	------------------

General

Color	red
Material	PA
Flammability rating according to UL 94	V2
Assembly instructions	for sleeve housing HC-MOD-K-TMS-.../panel mounting base HC-MOD-K-AFS-...

Standards and Regulations

Flammability rating according to UL 94	V2
--	----


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Coding profile - HC-MOD-K-CP - 1408562

Dimensional drawing

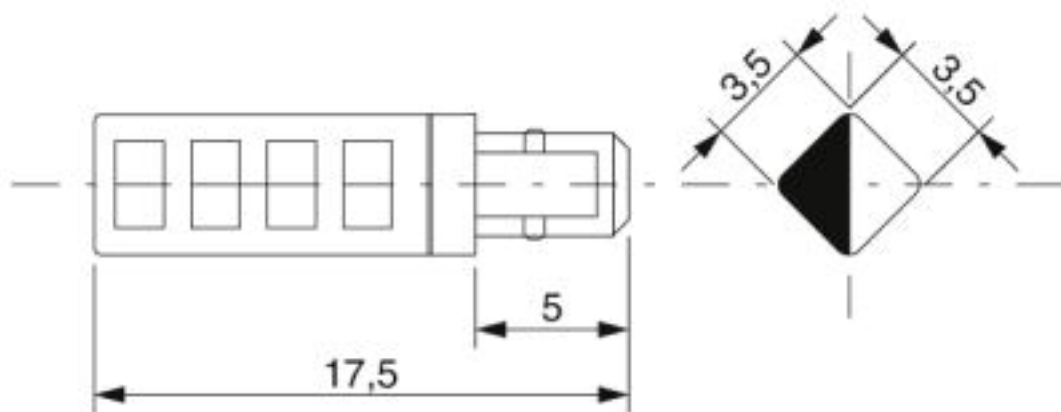

Dimensional drawing

Classifications

eCl@ss

eCl@ss 10.0.1	27440203
eCl@ss 4.0	23090100
eCl@ss 4.1	23090100
eCl@ss 5.0	23090100
eCl@ss 5.1	23090100
eCl@ss 6.0	27269200
eCl@ss 7.0	27440203
eCl@ss 8.0	27440203
eCl@ss 9.0	27440203

ETIM

ETIM 4.0	EC000437
ETIM 5.0	EC002311
ETIM 6.0	EC002311
ETIM 7.0	EC002311

UNSPSC

UNSPSC 6.01	31161807
UNSPSC 7.0901	31161807
UNSPSC 11	31161807
UNSPSC 12.01	31161807
UNSPSC 13.2	27112301
UNSPSC 18.0	27112301
UNSPSC 19.0	27112301
UNSPSC 20.0	27112301
UNSPSC 21.0	27112301

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>