

## Patch cable - NBC-R4AC1/20,0-94G/R4AC1-BU - 1413166

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid  
(<http://phoenixcontact.com/download>)



Patch cable, degree of protection: IP20, cable length: 20 m, number of positions: 8, 10 Gbps, CAT6<sub>A</sub>



### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 1 pc                                                                                                    |
| GTIN         | <br>4 046356 990011 |
| GTIN         | 4046356990011                                                                                           |

### Technical data

#### Cable type

|                                 |                         |
|---------------------------------|-------------------------|
| Fixed cable length              | 20.00 m                 |
| Shielded                        | yes                     |
| Conductor structure signal line | 6.00 mm +0.2 mm -0.1 mm |
| AWG signal line                 | 26                      |
| Shielding                       | S/FTP                   |
| Insulation resistance           | 2000 MΩ*km (500 V)      |
| Coupling resistance             | 30.00 mΩ/m (30 MHz)     |
| Test voltage                    | 1000 V DC (1 minute)    |
| Material wire insulation        | PE                      |

#### Ambient conditions

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Ambient temperature (operation) | -25 °C ... 60 °C (RJ45 connector) |
|                                 | -25 °C ... 75 °C (cable)          |

#### External sheath

|                        |                     |
|------------------------|---------------------|
| Outer sheath, material | PUR                 |
| External sheath, color | water blue RAL 5021 |

#### General

## Patch cable - NBC-R4AC1/20,0-94G/R4AC1-BU - 1413166

### Technical data

#### General

|                                         |                   |
|-----------------------------------------|-------------------|
| Conductor length                        | 20.00 m           |
| Nominal voltage $U_N$                   | 48 V              |
| Transmission characteristics (category) | CAT6 <sub>A</sub> |
| Transmission speed                      | 10 Gbps           |
| Degree of protection                    | IP20              |


#### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

### Drawings


## Patch cable - NBC-R4AC1/20,0-94G/R4AC1-BU - 1413166

Schematic diagram

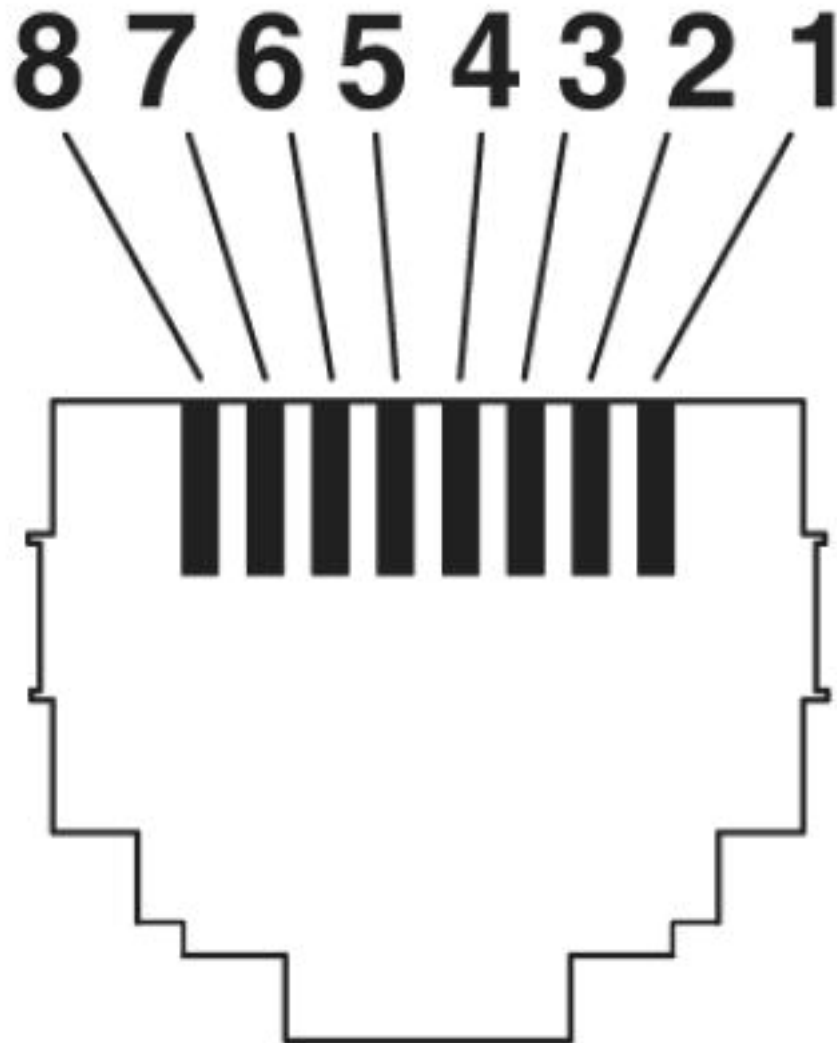

Connector pin assignment plug RJ45

Dimensional drawing

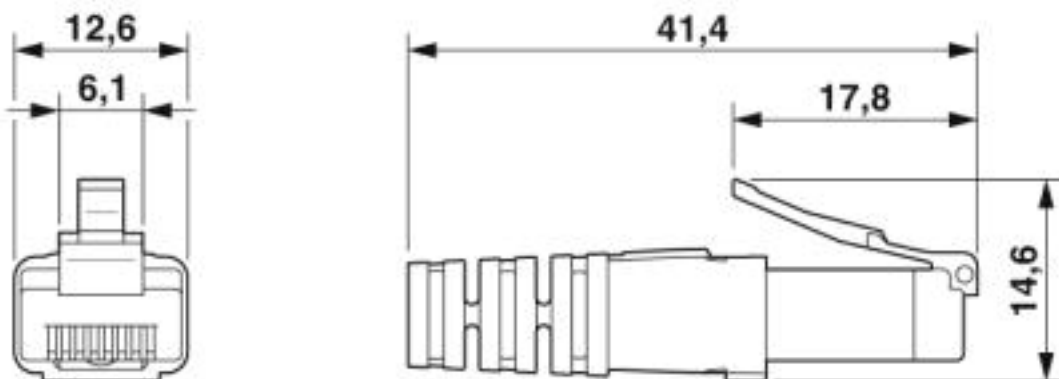

## Patch cable - NBC-R4AC1/20,0-94G/R4AC1-BU - 1413166

### Classifications

#### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27060308 |
| eCl@ss 4.0    | 27260700 |
| eCl@ss 4.1    | 27260700 |
| eCl@ss 5.0    | 27260700 |
| eCl@ss 5.1    | 27260700 |
| eCl@ss 6.0    | 27189200 |
| eCl@ss 7.0    | 27060308 |
| eCl@ss 8.0    | 27060308 |
| eCl@ss 9.0    | 27060308 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC002599 |
| ETIM 6.0 | EC001262 |
| ETIM 7.0 | EC001262 |

#### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 26121604 |
| UNSPSC 18.0 | 26121604 |
| UNSPSC 19.0 | 26121604 |
| UNSPSC 20.0 | 26121604 |
| UNSPSC 21.0 | 26121604 |

### Approvals

#### Approvals

#### Approvals

#### EAC

#### Ex Approvals

#### Approval details

|     |                                                                                     |          |
|-----|-------------------------------------------------------------------------------------|----------|
| EAC |  | 19060508 |
|-----|-------------------------------------------------------------------------------------|----------|

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>