

## Sealing cap - PROT-M12 FS-M - 1430488

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

RoHS

### Key Commercial Data

|              |                                                                                      |
|--------------|--------------------------------------------------------------------------------------|
| Packing unit | 10 pc                                                                                |
| GTIN         |  |
| GTIN         | 4046356325776                                                                        |

### Technical data

#### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Degree of protection            | IP65             |
|                                 | IP67             |
|                                 | IP69K            |

#### General

|      |                                    |
|------|------------------------------------|
| Note | Use up to max. 48 V AC and 60 V DC |
|------|------------------------------------|

#### Material

|                  |         |
|------------------|---------|
| Material         | CuZn/Ni |
| Sealing material | NBR     |


#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50 years                                                      |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings

## Sealing cap - PROT-M12 FS-M - 1430488

Dimensional drawing

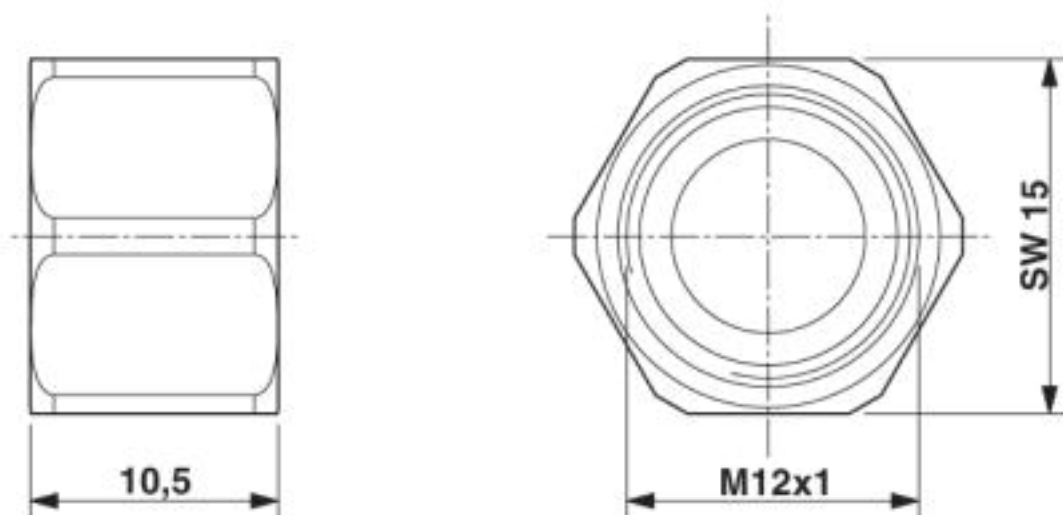

### Classifications

#### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 23111190 |
| eCl@ss 4.0    | 27260700 |
| eCl@ss 4.1    | 27260700 |
| eCl@ss 5.0    | 27260700 |
| eCl@ss 5.1    | 27260700 |
| eCl@ss 6.0    | 27261200 |
| eCl@ss 7.0    | 27440208 |
| eCl@ss 8.0    | 23111190 |
| eCl@ss 9.0    | 23111190 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC002040 |
| ETIM 4.0 | EC002040 |
| ETIM 5.0 | EC002040 |
| ETIM 6.0 | EC000032 |
| ETIM 7.0 | EC000032 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261502 |
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11     | 31261502 |
| UNSPSC 12.01  | 31261502 |
| UNSPSC 13.2   | 31261502 |
| UNSPSC 18.0   | 31261502 |
| UNSPSC 19.0   | 31261502 |

## Sealing cap - PROT-M12 FS-M - 1430488

### Classifications

#### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 20.0 | 31261502 |
| UNSPSC 21.0 | 31261502 |

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>