

VS-25-DEVNET

Order No.: 1652240



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1652240>

D-SUB complete connector, for DeviceNet, shell size 3, plug, screw connection, unshielded, connection direction straight, IP67 degree of protection

Commercial data

GTIN (EAN)	 4 017918 929169
sales group	D503
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 24 (PC-2005)

Product notes

WEEE/RoHS-compliant since:
06/22/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Number of positions	15
Insertion/withdrawal cycles	≥ 200
Connection method	Solder connection
Insertion force per signal contact	≤ 3.40 N
Ambient temperature (operation)	-55 °C ... 125 °C

Material data


Inflammability class acc. to UL 94	V0
Housing material	Steel
Housing surface material	Tin-plated
Contact carrier material	PBT-GF
Contact material	Copper alloy
Contact surface material	Gold over nickel

Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A


Diagrams/Drawings

Drilling plan/solder pad geometry

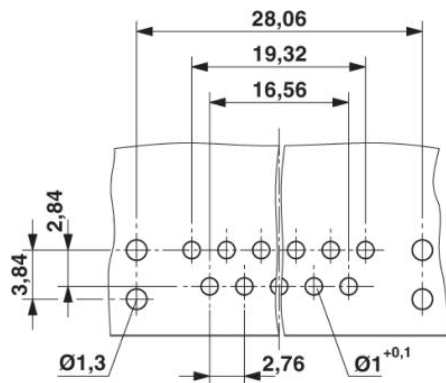

Drilling diagram

Dimensioned drawing

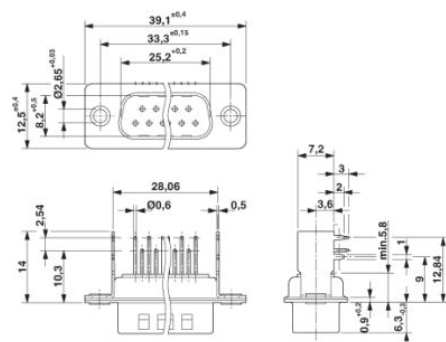

D-SUB contact insert

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;