

HC-B 24-KML-79/M1PG29

Order No.: 1772081



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1772081>

Coupling housing, with single locking latch, height 79 mm, with screw connection, 1x PG29

Commercial data

GTIN (EAN)	4 017918 036751
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 573 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
01/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	For contact inserts HC-B24, BB46, D64, DD108, M
Design	B24
Height	79 mm
Width	43 mm
Length	120 mm

Housing type	Coupling housings
Locking type	With single locking latch
No. of cable exits	1
Cable exit	Straight
Pg screw connection	With
Type of the screw connection	1x Pg29
Wrench size, union nut	37 mm
External cable diameter	18 mm ... 27 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Cable gland material	Nickel-plated brass
Cable seal material	NBR
Material lock	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

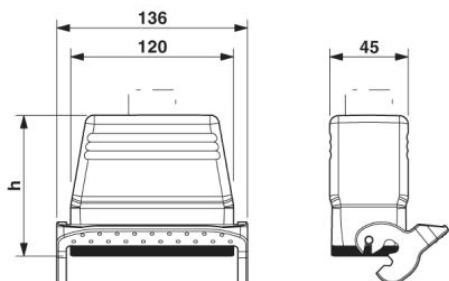

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;