

CT 10-9VA-120AC

Order No.: 2830485

The illustration shows version CT 10-9VA-F/PE-230 AC



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2830485>

LSA-PLUS plug (COMTRAB CT 10) with surge protection incl. visual fault warning for nine 2-core signal circuits. Nominal voltage: 120 V AC. Design: 10 double wires



Commercial data

GTIN (EAN)	 4 017918 106560
Note	Made-to-order
sales group	J462
Pack	1 pcs.
Customs tariff	85363010
Catalog page information	Page 119 (TT-2011)

Product notes

WEEE/RoHS-compliant since:
06/13/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Housing material	PBT
Inflammability class acc. to UL 94	V2
Color	black

Standards for air and creepage distances	VDE 0110-1
	IEC 60664
Total surge current (8/20) μ s	5 kA
Ambient temperature (operation)	-40 °C ... 85 °C
Mounting type	On CT-TERMIBLOCK and LSA-PLUS disconnect strip
Design	LSA-PLUS module
Degree of protection	IP20
Direction of action	Line-Line & Line-Earth Ground
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.00
Width	111.00 mm
Height	68.50 mm
Length	22.00 mm

Protective circuit

IEC category	C1
	C3
Nominal voltage U_N	120 V AC
Maximum continuous operating voltage U_C	200 V DC
	150 V AC
Maximum continuous voltage U_C (wire-ground)	200 V DC
	150 V AC
Maximum continuous voltage U_C (wire-GND)	200 V DC
	150 V AC
Nominal current I_N	1.5 A
Operating effective current I_C at U_C	≤ 1.5 mA
	≤ 2.5 mA
Ground conductor current I_{PE}	≤ 1 μ A
Nominal discharge surge current I_n (8/20) μ s (Core-Earth)	1.5 kA
Nominal discharge surge current I_n (8/20) μ s (Core-GND)	1.5 kA
Total surge current (8/20) μ s	5 kA
Max. discharge surge current I_{max} (8/20) μ s maximum (Core-Earth)	5 kA (10-PE)
Max. discharge surge current I_{max} (8/20) μ s maximum (Core-GND)	4.5 kA (10)
Residual voltage at I_n , (conductor-ground)	≤ 1.4 kV

Residual voltage at In, (conductor-GND)	≤ 600 V
Fixed cable length	10 m
Energy absorption, asymmetrical	40 J
Protection level U _p (Core-Earth)	≤ 1.4 kV (10-PE)
Protection level U _p (Core-GND)	≤ 600 V (10)
Response time t _A (Core-Core)	≤ 25 ns
Response time t _A (Core-Earth)	≤ 25 ns
	≤ 100 ns
Frequency range	50 Hz ... 60 Hz
Capacity (Core-GND)	570 pF (10)
Capacity (Core-Earth)	2 pF (10-PE)
Message: Surge protection fault	Optical
Max. required back-up fuse	1.5 A (gL)

Connection data

Connection method	can be plugged into COMTRAB-TERMIBLOCK and LSA-PLUS disconnect and switching strips
Connection type IN	COMTRAB plug-in system
Connection type OUT	COMTRAB plug-in system

Connection, protective circuit

Standards/regulations	IEC 61643-21
-----------------------	--------------

Certificates / Approvals



Certification

GOST

Accessories

Item	Designation	Description
Assembly		
0441711	CT-TERMIBLOCK 10 DA	Screw termination block with disconnect contacts for accommodating protective plugs CT and CTM. Use in MCR and telecommunications systems. Design: 10 double wires

Additional products


Item	Designation	Description
Assembly		
2839295	SSA 3-6	shield fast connections for conductor diameter 3 - 6 mm. Potential connection cable: 200 mm, black
2839512	SSA 5-10	Shield fast connection for conductor diameters 5 - 10 mm. Potential connection cable: 200 mm, black

General


2765372	CT 10-MB/ 3	Mounting clip, for holding 3 disconnect or ground wire strips. Version: 10 double conductors, dimensions: A 104.5 mm, B 65 mm.
2765385	CT 10-MB/10	Mounting clip, for holding 10 disconnect or ground wire strips. Version: 10 double conductors, dimensions: A 104.5 mm, dimensions B 245.5 mm
2765356	CT 10-TL	LSA-PLUS disconnect strip to hold the CTM and CT 10 protection modules. Version: 10 double conductors, dimension A: 124 mm.
2765518	CT-KDT	Cable bush for assembly troughs, for protection of the lines guided through the laminated frame

Diagrams/Drawings

Dimensioned drawing

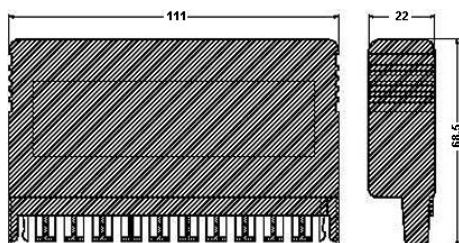

Circuit diagram

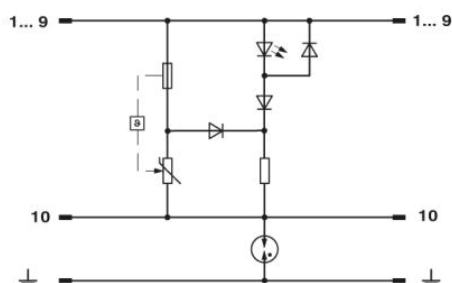

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;