

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Electronic housing, for PCB insertion, without screw connection terminal blocks and cover

Your advantages

- ☑ Practical and easy-to-wire conductor connections
- Space-saving accommodation of electronic components in finely graded module versions available with 10 to 150 mm pitch
- ☑ User-friendly and safe mounting on DIN rails according to EN 60715
- Uniform and appropriate housing technology
- High degree of flexibility due to the wide choice of versions
- ☑ Inflammability class V0 insulation material (according to UL 94)
- Shock and contamination-proof accommodation of electronic components
- Universal PCBs for all pitches



Key Commercial Data

| Packing unit | 5 pc |
|--------------|-----------------|
| GTIN | 4 017918 082710 |
| GTIN | 4017918082710 |

Technical data

General

| Housing type | Component housing |
|------------------|--------------------------------|
| Housing material | Polycarbonate fiber reinforced |

Ambient conditions

| Ambient temperature (operation) | -40 °C 125 °C |
|---------------------------------|---------------|

Dimensions

| Length | 75 mm |
|--------|---------|
| Height | 47.5 mm |



Technical data

Dimensions

| Width | 75 mm |
|-------|-------|
| Pitch | 5 mm |
| Depth | 75 mm |

Technical data

| Power dissipation without gap | 3.3 W |
|----------------------------------|-------|
| Power dissipation with 20 mm gap | 3.9 W |
| Number of positions | 28 |

Connection data

| Conductor cross section solid min. | 0.2 mm² |
|---------------------------------------|---------------------|
| Conductor cross section solid max. | 4 mm² |
| Conductor cross section flexible min. | 0.2 mm² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 12 |
| Stripping length | 8 mm |

Standards and Regulations


| Flammability rating according to UL 94 | V0 |
|--|----|
|--|----|


Environmental Product Compliance

| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|------------|---|
| | No hazardous substances above threshold values |

Drawings






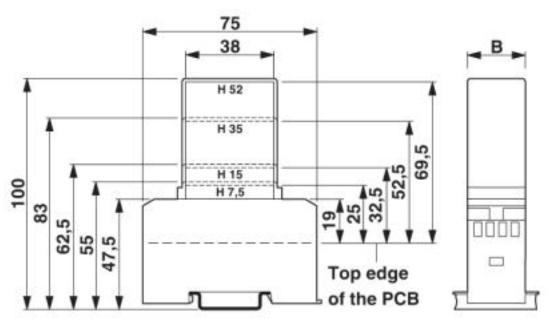

1 = Top edge of the PCB

B = Housing width

Dimensional drawing

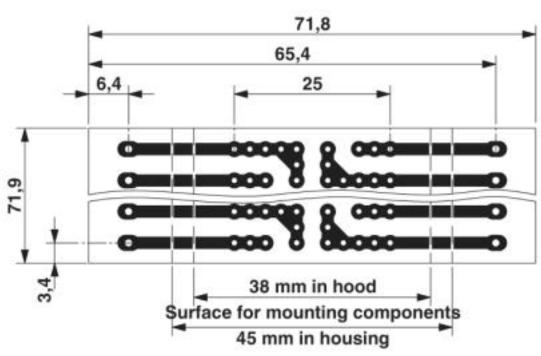

Pitch 5 mm

a = Area for mounting components, 38 mm in the hood

b = Area for mounting components, 45 mm in the housing



Classifications

eCl@ss

| eCl@ss 10.0.1 | 27182702 |
|---------------|----------|
| eCl@ss 4.0 | 27180400 |
| eCl@ss 4.1 | 27180400 |
| eCl@ss 5.0 | 27180500 |
| eCl@ss 5.1 | 27180500 |
| eCl@ss 6.0 | 27180800 |
| eCl@ss 7.0 | 27182702 |
| eCl@ss 8.0 | 27182702 |
| eCl@ss 9.0 | 27182702 |

ETIM

| ETIM 2.0 | EC001031 |
|----------|----------|
| ETIM 3.0 | EC001031 |
| ETIM 4.0 | EC001031 |
| ETIM 5.0 | EC001031 |
| ETIM 6.0 | EC001031 |
| ETIM 7.0 | EC001031 |

UNSPSC

| UNSPSC 6.01 | 31261501 |
|---------------|----------|
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11 | 31261501 |
| UNSPSC 12.01 | 31261501 |
| UNSPSC 13.2 | 31261501 |
| UNSPSC 18.0 | 31261501 |
| UNSPSC 19.0 | 31261501 |
| UNSPSC 20.0 | 31261501 |
| UNSPSC 21.0 | 31261501 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details



Approvals

EAC

EHE

B.01742

Accessories

Accessories

Device marking

Marking material - EMG-GKS 22 - 2941594



Device marking label, width: 22 mm, area: 22 x 8 mm, e.g. for EML(20x8) R adhesive marking material

Marking material - EMG-GKS 22 - 2941594



Device marking label, width: 22 mm, area: 22 x 8 mm, e.g. for EML(20x8) R adhesive marking material

Filler plug

Electronic housing - EMG-KA - 2941510



Terminal block/screw cover, set consisting of 50 strips each for terminal blocks and screw openings, 1 strip covers 12 terminal points.

Electronic housing - EMG-KA - 2941510



Terminal block/screw cover, set consisting of 50 strips each for terminal blocks and screw openings, 1 strip covers 12 terminal points.

PCB



Accessories

Electronic housing - P 1-EMG 75 - 2947394

PCB for assembling electronic components



Marking material - EMG-GKS 12 - 2947035



Device marking label, width: 12 mm, area: 12 x 8 mm, e.g. for EML(10x7) R adhesive marking material

Marking material - EMG-GKS 12 - 2947035



Device marking label, width: 12 mm, area: 12 x 8 mm, e.g. for EML(10x7) R adhesive marking material

Necessary add-on products

Covering hood - EMG 75-H 7,5MM KLAR - 2947954



Covering hood, for the contact and dust-protected encapsulation of the components, in transparent design. Height: 7.5 mm, width: 75 mm

Covering hood - EMG 75-H 15MM KLAR - 2947967



Covering hood, for the contact and dust-protected encapsulation of the components, in transparent design. Height: 15 mm, width: 75 mm



Accessories

Covering hood - EMG 75-H 52MM GN - 2947970



Covering hood, for the contact and dust-protected encapsulation of the components, in green design. Height: 52 mm, width: 75 mm

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany

Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com