

PSR-SPP- 24DC/RSM4/4X1

Order No.: 2981541

The figure shows a version with a screw connection



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2981541>

2-channel speed and downtime monitor, 4 N/O contacts, option of start button monitoring or automatic start for SIL 3 in acc. with IEC 61508, pluggable spring-cage connection terminal blocks, width: 45 mm



Commercial data

GTIN (EAN)	4017918996833
sales group	G551
Pack	1 pcs.
Customs tariff	85371099
Weight/Piece	0.3468 KG
Catalog page information	Page 33 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
11/15/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Input data

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.85 ... 1.1
Typical input current at U_N	100 mA
Voltage at input/start and feedback circuit	24 V DC

Typical response time	15 ms
Typical release time	12 ms
Recovery time	1 s

Output data

Contact type	4 enabling current paths
Contact material	AgNi10, + 5 µm Au
Maximum switching voltage	250 V AC/DC (when the gold layer is destroyed) 60 V AC/DC (With gold layer existing)
Minimum switching voltage	100 mV AC/DC
Limiting continuous current	5 A 100 mA (alarm outputs)
Maximum inrush current	6 A
Inrush current, minimum	1 mA
Sq. Total current	$42.25 \text{ A}^2 (I_{TH}^2 = I_1^2 + I_2^2 + I_3^2 + I_4^2)$
Interrupting rating (ohmic load) max.	67 W (24 V DC, $\tau = 0 \text{ ms}$) 36 W (48 V DC, $\tau = 0 \text{ ms}$) 43 MW (110 V DC, $\tau = 0 \text{ ms}$) 68 MW (220 V DC, $\tau = 0 \text{ ms}$)
Switching capacity min.	1 mW
Output fuse	6 A gL

General data

Width	45 mm
Height	114.5 mm
Depth	112 mm
Ambient temperature (operation)	-20 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Relay type	Electromechanically positively driven, dust-proof relay.
Service life mechanical	> 50 x 10 ⁶ cycles
Mounting position	Any
Assembly instructions	In rows with zero spacing
Category in acc. with EN 954-1	4
Stop category	0
Name	Air and creepage distances between the power circuits
Standards/regulations	EN 60664/VDE 0110

Rated surge voltage / insulation	4 kV / Basic isolation, (safe isolation, reinforced insulation and 6 kV between input circuit and enabling current paths.)
Rated insulation voltage	250 V
Pollution degree	2
Surge voltage category	III

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	16
Stripping length	8 mm
Type of connection	Spring-cage conn.

Certificates / Approvals



Certification

CUL Listed, GOST, TUEV-RH, UL Listed





Accessories


Item	Designation	Description
General		
2981651	CABLE-15/8/250/RSM/AMK	Cable adapter for PSR-RSM, 15/8-pos., cable length 2.5 m, for controller: AMK
2981648	CABLE-15/8/250/RSM/DKC	Cable adapter for PSR-RSM, 15/8-pos., cable length 2.5 m, for controller: Indramat
2981635	CABLE-15/8/250/RSM/FM-NC	Cable adapter for PSR-RSM, 15/8-pos., cable length 2.5 m, for controller: Siemens
2981619	CABLE-15/8/250/RSM/MHD/G	Cable adapter for PSR-RSM, 15/8-pos., cable length 2.5 m, for controller: Indramat
2981606	CABLE-15/8/250/RSM/SIMO611D	Cable adapter for PSR-RSM, 15/8-pos., cable length 2.5 m, for controller: Siemens, Heidenhain
2981622	CABLE-15/8/250/RSM/SIN800	Cable adapter for PSR-RSM, 15/8-pos., cable length 2.5 m, for controller: Siemens

2981596	CABLE-25/8/250/RSM/ARADEX	Cable adapter for PSR-RSM, 25/8-pos., cable length 2.5 m, for controller: Aradex
2981583	CABLE-25/8/250/RSM/SIMO611D	Cable adapter for PSR-RSM, 25/8-pos., cable length 2.5 m, for controller: Siemens, Heidenhain
2981554	PSR-CONF-WIN1.0	PSR configuration software with connecting cable



Diagrams/Drawings

Diagram

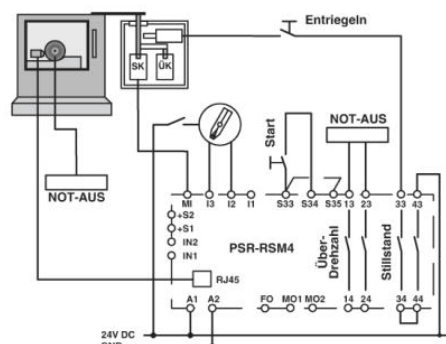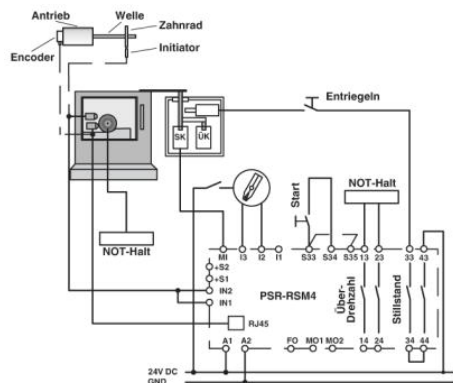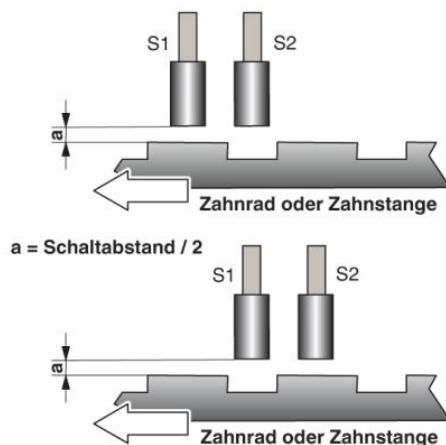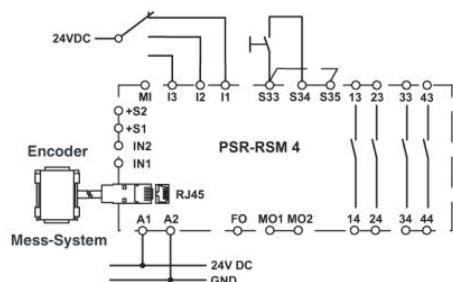

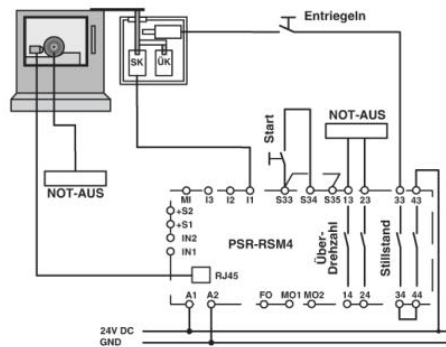

Circuit diagram

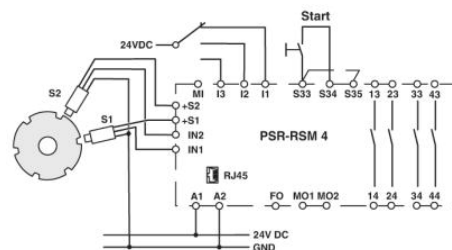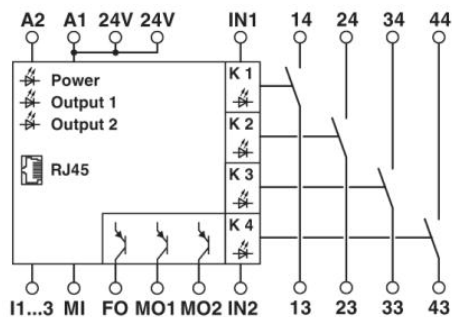

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;