

MS-228-7



MS-228-7

Normally Closed Reed Sensor
M8 thread

Electrical Characteristics		@ 25 °C
Contact form		B
Contact rating max.	W / VA	5
Switching voltage max.	VDC	175
	VAC	120
Switching current max.	A	0.25
Carry current max.	A	1.5
Breakdown voltage min.	VDC	200
Total resistance max. (initial)	mΩ	200
Insulation resistance min.	Ω	10 ⁹

Features
➤ Adjustable switching point
➤ Customized types available
➤ Mechanically protected
➤ Non pole oriented actuation

Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	15 - 30
Drop out min.	AT	5
Test coil	TC	200
Test equipment tolerance	± AT	2

Operating Characteristics (of unmodified Reed Switch)		@ 25 °C
Switching frequency max.	Hz	100
Resonant frequency typ.	Hz	1100
Operate time max. (incl. bounce)	ms	0.7
Release time max.	ms	1

Environmental Characteristics		
Operating temperature	°C	-20 to +85
Vibration (50-2000 Hz)	g	30
Shock (1/2 sin 11 ms)	g	50

Approvals
RoHS
REACH
CE

Dimensions in mm	

Ordering Information	
Packing Unit	50 pcs
Weight per piece	7 g
Weight per package	365 g
Standard AT Ranges	
	2 = 15 to 20 AT
	3 = 20 to 25 AT
	4 = 25 to 30 AT
Ordering Example	
MS-228-7-2 describes MS-228-7 with 15 to 20 AT.	

MS-228-7




MS-228-7

Normally Closed Reed Sensor
M8 thread

Material Information

	Material	Colour
Housing	PA-GF	black
Cable	UL 1007/1569, AWG 24, 4 mm stripped and tinned	black
Potting compound	Epoxy	black
Nuts	PA6, M8, 2 pcs separately packed	black

Test Procedure of final Reed Sensor

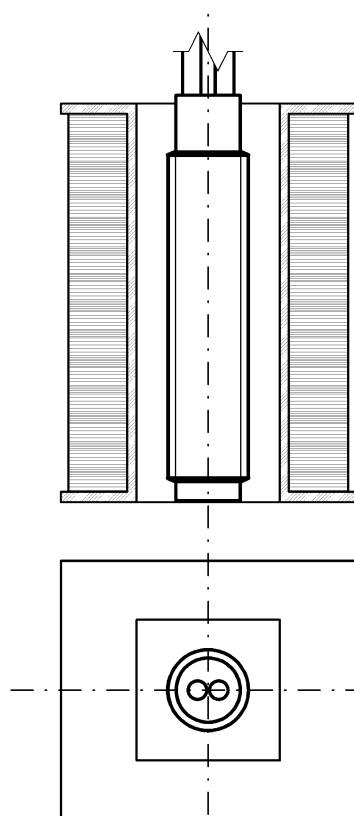

Test Coil placed in vertical position

Reed Sensor centered in Test Coil

Measured without nuts

Reed Sensor aligns with bottom line

Test Parameters

Test coil	TC- 324
Test programs	
AT range	Test program
2 =	MS-228-7-2
3 =	MS-228-7-3
4 =	MS-228-7-4

Remarks

When mounted onto ferromagnetic parts switching distance of MS-228-7 may reduce.
Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Product image serves as example only.

Matching actuator MSM-228 available as well.