


## Model BNC-x-XX BNC Male To Male Cable Assembly

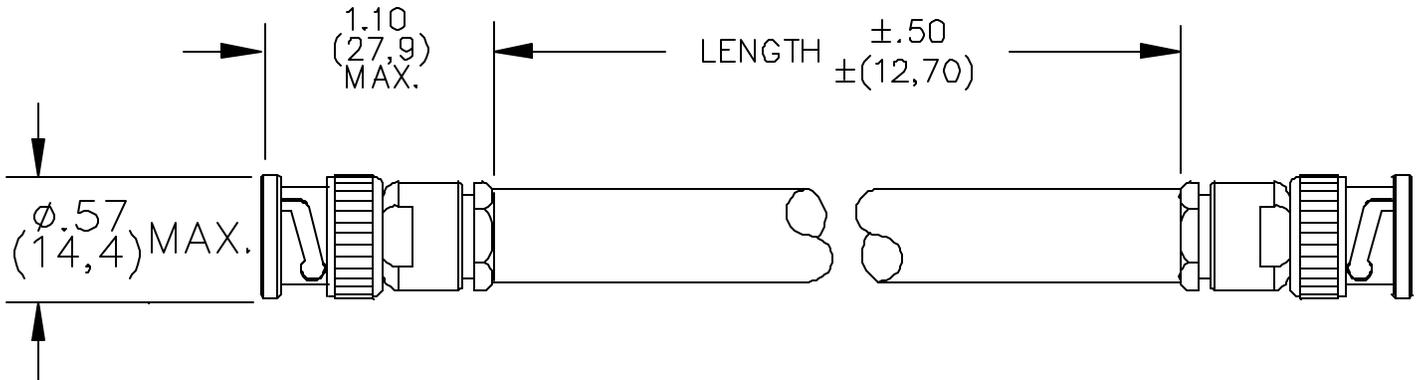

| Part No. | Cable Type | Capacitance<br>PF/ft. | Nominal<br>Impedance | Cable Color | Cable O. D. |
|----------|------------|-----------------------|----------------------|-------------|-------------|
| BNC-C-XX | RG58C/U    | 30.8                  | 50 Ohms              | Black       | 0.195"      |
| BNC-M-XX | RG62A/U    | 13.5                  | 93 Ohms              | Black       | 0.242"      |

### MATERIALS:

BNC Body: Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass

Dielectric: PTFE

### RATINGS:

Operating Voltage: Shield-Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max.

Operating Temperature: +80°C (+176°F) Max.

Nominal Impedance: 50 Ohms

### ORDERING INFORMATION: Model BNC-x-XX

x = Cable Type

XX = Cable Length in inches, length tolerance:  $\pm 0.5''$

Standard Lengths: 18'', 24'', 36'', 48'', 60'' & 600''.

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.  
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360  
Technical Assistance: 800-241-2060

PomonaACCESS 90445 (800) 444-6785 or (425) 446-6010  
More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)