

Part Number: AT-10SI



Features

Electro-mechanical audio transducer
P.C. Mounting - 6.5 lead spacing
12mm dia x 9.5mm high


Electrical Specifications

<u>Weight</u>	2 Grams
Case Material	Noryl SEI-J
<u>Storage Temperature Range</u>	-40 to +85 Deg C
Operating Temperature Range	-40 to +85 Deg C
<u>Sound Pressure Level @ 10 cm Typical</u>	85 dBA
Resonant Frequency	2600 Hz
<u>Rated Voltage</u>	1.5 Vp-p
Operating Voltage	1 - 2 Vp-p
<u>Rated Current (Typical)</u>	40 mA
Coil Resistance	42 Ohms

P.C. Pins: Tin Plated Copper

The top sound port is covered with a removable piece of tape and the base is potted for wave soldering and cleaning

Wave solderable and washable

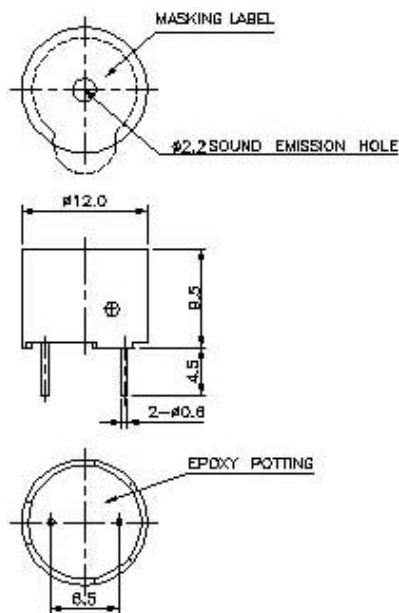


For application notes and detail drawing specifications, please consult www.projectsunlimited.com.

Specifications subject to change without notice.

© 2001, Projects Unlimited Inc., All Rights Reserved.

Part Number: AT-10SI

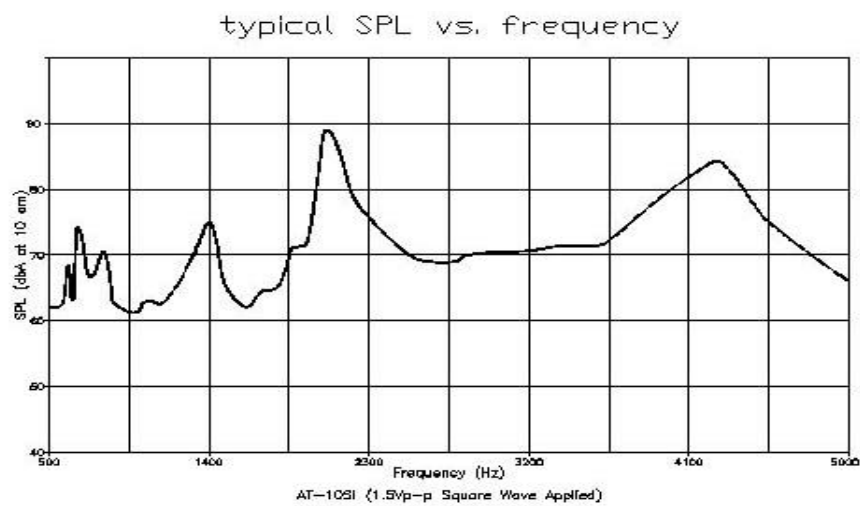

For application notes and detail drawing specifications, please consult www.projectsunlimited.com.

Specifications subject to change without notice.

© 2001, Projects Unlimited Inc., All Rights Reserved.