

## Fuse DTII 500V



See below:

[Approvals and Compliances](#)

### Description

- Operation full range cable defensive fuses
- Over-load and short-circuit protection
- Colored characteristic detector in the middle
- Characteristic gG
- According to IEC 269

### Technical Data

Rated Current In	2- 25 A
Rated Voltage	500 VAC
Breaking Capacity	50 kA
Rated Power Operating Frequency fe	50 Hz

### Basic Design

Insulator	Ceramics
Metal components	Brass

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)


### Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
<a href="#">REACH</a>	<a href="#">REACH</a>	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Time-Current-Curves

DT II - DT III

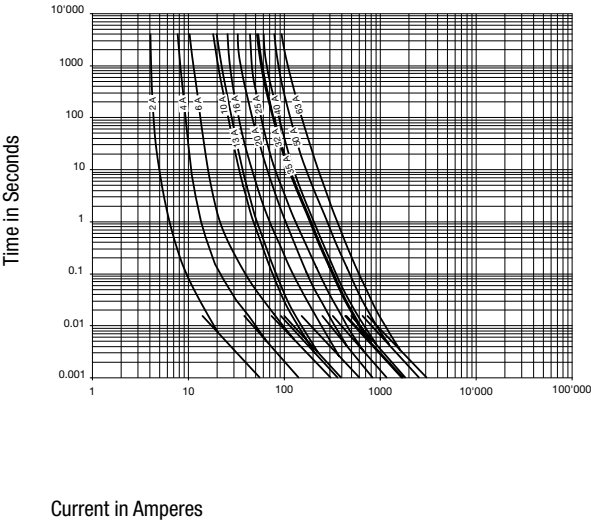

All Variants

Rated current	Color	Packaging unit	Order Number	E-No.	
[A]		Pcs			
2	rosé	25	0001.2021	800250209	Most Popular
4	brown	25	0001.2022	800250409	
6	green	25	0001.2023	800250609	
10	red	25	0001.2024	800251009	
16	grey	25	0001.2025	800251509	
20	blue	25	0001.2026	800252009	
25	yellow	25	0001.2027	800252509	

Most Popular:

Availability for all products can be searched real-time:<https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>